

Gwendy Hall

*Review of analytical considerations with
respect to selective leaches*

Gwendy E.M. Hall, Geological Survey of Canada

This talk is taken from one of the "distinguished lecture" series and presents essentially a review of analytical considerations with respect to selective leaches. Rather than copy the slides for this notebook, I have selected some of my recent papers on this subject which go into much more detail; others can be obtained by request (hall@gsc.nrcan.gc.ca). Many of us are attempting to understand the various mechanisms of element transport from depth; this is an extremely challenging area of research. We must start by ensuring that the results of selective or partial/unselective extractions are optimised in terms of their precision and accuracy, that we are analysing exactly what we are aiming for (i.e. the methods are robust). From that point, we can go on to discern whether anomalies reflect mineralisation below or whether they reflect changes in surficial and bedrock geology, fault systems, landscape, soil type, topography, drainage, aerial deposition and so on. Here are some pertinent considerations to the application of partial extractions:

- What sample medium (e.g. organic-rich humified horizon, peat, well developed B-horizon..) is most prevalent and consistent throughout the survey area and therefore what "phase" is most appropriate to analyse?
- Is there adequate scavenging phase present throughout the samples so that all available/labile element is fixed? If not, is normalisation to the major element of that phase really appropriate?
- How should the sample be prepared to minimise any change in element distribution (air-dried, kept wet)?
- What size fraction should be selected? Do results reflect grain size distribution?
- What is the precision of sampling and analysis (the latter is usually much better than the former, as it ought to be)?
- Is the analysis accurate with respect to dissolving only that "phase" or "form" of element targeted, i.e. is the leach selective (if desired) or are other minerals also being dissolved to a significant extent? Is *all* the phase being dissolved by one application and if not, does it matter?
- Is the analysis accurate, are all interferences corrected for?
- Is the element stable in solution *during* the leach (i.e. no readsorption/precipitation) and *after* the leach prior to analysis?
- Is the leach pH-controlled or do results depend upon the sample pH?

Five papers are included here.



ELSEVIER

Journal of Geochemical Exploration 61 (1998) 1–19

**JOURNAL OF
GEOCHEMICAL
EXPLORATION**

Analytical perspective on trace element species of interest in exploration

Gwendy E.M. Hall *

Geological Survey of Canada, Analytical Method Development, Room 555, 601 Booth Street, Ottawa, ON K1A 0E8, Canada

Accepted 21 October 1997

Abstract

Analysis of soil and sediment samples, using selective extraction methods to distinguish different phases, is of particular interest in exploration geochemistry to locate deeply buried mineral deposits. There are various mechanisms of binding labile elements in the secondary environment, including physical and chemical sorption, precipitation, chelation and complexation. Phases present in soils and sediments which are likely to scavenge 'free' elements include amorphous Mn and Fe oxides, the humic and fulvic components of humus, and clays. This paper reviews these forms of trace elements and the methods in current use to quantify them. Examples of precision data, both for control and survey samples, are given with respect to trace elements dissolved from the 'soluble organic' component of humus, Mn oxides and amorphous Fe oxides. The high sensitivity of inductively coupled plasma mass spectrometry (ICP-MS) is required to measure accurately and precisely a large suite of trace elements, especially where only small fractions of elements are dissolved by such leaches as the commercially available Enzyme and MMI (Mobile Metal Ion) extractions. The relative standard deviations (RSD) obtained for 33 elements (e.g. Ag, Cd, In, I) in the standard reference sample (SRM), TILL-2, are in the range 0.5–8% for the hydroxylamine hydrochloride ($\text{NH}_2\text{OH} \cdot \text{HCl}$) leach designed to extract hydrous Fe and Mn oxides. The corresponding RSDs for elements in the reactive Mn oxide phase extracted by the Enzyme leach are in the range 3–19% except for some trace elements at levels close to detection limit (e.g. Cd, Bi). The RSDs obtained for field duplicates are inferior to those for analytical replicates (i.e. sample splits), probably a reflection of different concentrations of the host phase. In one soil survey, the Fe extracted by a 0.25 M $\text{NH}_2\text{OH} \cdot \text{HCl}$ leach ranged conservatively from 0.2 to 1.7% whereas the Mn extracted by the Enzyme leach varied extensively, from 0.3 to > 999 ppm. In contrast, precision, at 1–7% RSD, for field duplicates was found to be comparable with that for both analytical duplicates and the SRM, LKSD-4, for elements associated with the humic and fulvic component of humus samples sieved to < 177 μm . © 1998 Elsevier Science B.V. All rights reserved.

Keywords: selective leach; analysis; precision; soil; sediment; element speciation

1. Introduction

Interest in the use of selective leaches in geochemical exploration was rekindled by the reported successes of the Russians in using this methodology

to locate deeply buried mineralisation in glaciated and non-glaciated terrains (Ryss et al., 1990; Antropova et al., 1992; Goldberg, 1998). Although this approach has found application outside Russia since the 1970s (Bradshaw et al., 1974; Chao, 1984; Hall, 1996), until recently relatively few surveys employed selective leaching, probably because of

* E-mail: hall@gsc.nrcan.gc.ca

inadequate detection limits and relatively high analytical costs. Electroanalytical (e.g. polarography) and solid sample emission spectroscopic techniques were designed in Russia to play key roles in measuring elements bound to fulvic and humic material (designated 'MPF') and to amorphous Fe oxyhydroxides ('TMGM'). Transfer of the analytical technique ICP-MS, generally more sensitive than ICP-ES by several orders of magnitude, from research-oriented laboratories to commercial labs in the 1990s has opened the door to high-production, affordable selective analysis. Two popular commercially available leaches are known as: the Enzyme leach (Activation Laboratories, Ancaster, ON; Clark, 1993), designed to dissolve the amorphous or 'more reactive' Mn oxide phase; and the MMI (Mobile Metal Ion) leach, designed to dissolve loosely held metals (Mann et al., 1998). The strengths and weaknesses of different leaches used at the Geological Survey of Canada (GSC) and at other commercial labs have been described previously (Hall et al., 1996a,b). This paper focusses on these various extractions and the reproducibility of results obtained by their implementation. Interpretation of results is addressed in other papers of this special issue.

The objective of selective leaching in the exploration context is to map specifically that fraction of an element which was previously in a labile (free) form and has been 'trapped' or immobilised in the surficial environment. Controversy abounds as to the dominant mechanisms of transport of the element from oxidising mineralisation at depth, whether it be by diffusion or 'fast-ion migration' (Goldberg, 1998), through faulting, water-borne or gaseous. However, there is agreement that the principal resident sites in the secondary environment for these migrating elements comprise hydrous Fe and Mn oxides, humic and fulvic components of humus material, and clay minerals. Thus, leaches have been developed to extract these 'phases' (used in a broad sense) in their entirety or to dissolve elements loosely adsorbed to them. These phases are generally not discrete, but rather exist linked together as colloids. Furthermore, binding mechanisms are not simple, comprising physical and chemical adsorption at surfaces, occlusion within structures, chelation, complexation and coprecipitation. These factors confound the design of a *selective* extraction which is often based on chang-

ing the pH and/or Eh environment of the sample to promote specific dissolution. Thus, true specificity is almost impossible to achieve and the term 'operationally defined' is used to describe more loosely the phase or form measured.

Sometimes it is necessary to carry out a 'pre-extraction' in order to improve the accuracy of the extraction of interest. For example, the various leaches employed to dissolve amorphous Mn and/or Fe oxides will also bring into solution elements physically and chemically sorbed at surfaces or elements precipitated as carbonates; an initial 'wash' in an appropriate solution would remove such forms. This approach then, in essence, forms a segment of a *sequential* extraction scheme. Such schemes are used in the sister disciplines of exploration and environmental geochemistry and have been compared recently by Hall and Pelchat (1997b). It is interesting that the tendency exists in environmental studies to attribute an *anthropogenic* source, particularly airborne, to labile elements leached out early in these schemes, whereas the philosophy underpinning these selective extractions in exploration assumes a *geogenic* source from buried mineralisation.

In a soil survey, the question of which selective leach to use cannot be answered without first examining the soil profile and thereby identifying the horizon most likely to have trapped the elements migrating from depth. The characteristics of the soil profile depend not only on the parent rock (or transported till) material but also on climate, topography and biological activity. Fig. 1 and Table 1 describe, in a generalised sense, characteristics of some idealised soil profiles. Soils in humid regions tend to be thoroughly leached and possess well defined Fe-rich B-horizons whereas much less extensive downward leaching occurs in semiarid warm climates, often producing calcareous soils with the formation of a caliche layer (CaCO_3 precipitation) which may be the target phase in exploration. In regions of significant rainfall with good drainage, leaching is usually extensive, and therefore A- and B-horizons are strongly differentiated. However, where drainage is poor and hence leaching minimal, reducing conditions prevail and a thick organic-rich surface layer may form over a mottled subsoil. Young soils often lack a B-horizon. Of particular interest in well developed Podzols are the organic-rich humus layer (A_1),

GENERALISED SOIL PROFILES

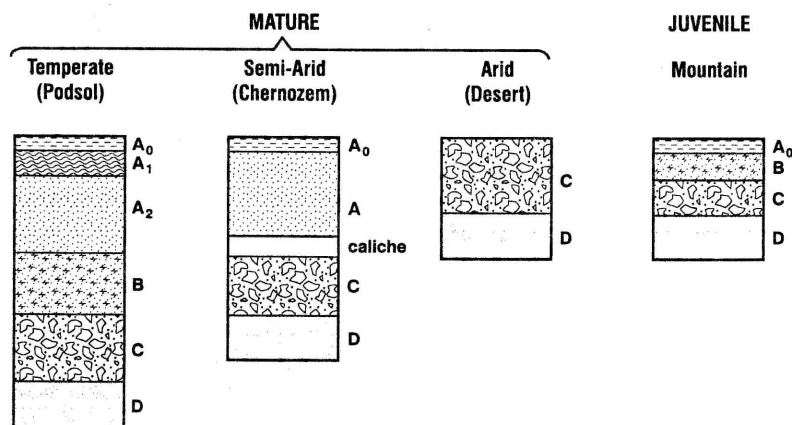


Fig. 1. Generalised soil profiles for four different climatic environments (taken from Levinson, 1974).

and the reddish-brown B-horizon, rich in hydrous Fe, Mn and Al oxides and clay minerals. Clearly, the light-coloured A₂-horizon (Fig. 1), zone of maximum leaching ('eluviation') and minimum cation exchange capacity, is not a good sampling medium.

Fig. 2 is a generalised representation of the distribution of Cu in four different soil types, taken from Levinson (1974). Copper accumulates in the upper humic layer and in the illuvial B-horizon of the

Podzol and forest soils. Trace metals tend to be enriched in the organic-rich layers of soils in less humid regions where leaching is low. In Chernozems (e.g. in fertile grasslands), Cu collects in the organic-rich upper layer, and in Chestnut (brunisol) soils under conditions of less precipitation, Cu is directly related to the amount of organic matter. In laterite profiles, the trace elements tend to be concentrated in the upper ferruginous B-horizon, but rela-

Table 1
Simplified description of soil profiles

Horizon	Description
A ₀	Partly decomposed organic debris. Should reflect chemistry of vegetation.
A ₁	Dark-coloured organic-rich material mixed with mineral matter. Good sample for elements bound to humates and fulvates.
A ₂	Light-coloured zone of maximum eluviation (leaching) of soluble bases, clays, colloidal oxides and organic matter by percolating rainwater. Well developed in Podzols, faint in Chernozems and may be absent in arid regions or young soils. Very low in trace elements.
B	Brownish colour due to illuviation (accumulation) of Fe/Mn oxides, organic matter and clays. Blocky or prismatic structure. High capacity for trace elements. Zone of illuviation in semiarid regions, forming caliche (coarse CaCO ₃ precipitate) which would be near surface under very dry conditions.
C	Zone of weathering bedrock or till, loose and partly decayed. Parent material for overlying A- and B-horizons. Minimal organic material and illuviation. Relic rock structures. Sometimes intensely gleyed layers or layers of CaCO ₃ in some soils. Sampled when A and B are missing or in some laterites.
D	Bedrock.

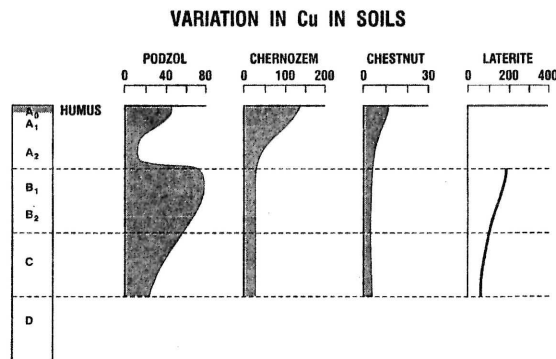


Fig. 2. Generalised representation of Cu in four soil types (taken from Levinson, 1974).

tively mobile elements such as Zn can accumulate at an intermediate montmorillonite-rich C-horizon (Zeissink, 1971). A thorough appreciation of the secondary environment and considerations relevant to geochemical exploration can be gleaned from numerous sources. Readers are referred to the classic books of Levinson (1974) and Rose et al. (1979), and more specifically, related to climatic zones, to those by Kauranne et al. (1992) for Arctic and temperate terrains, and Butt and Zeegers (1992) for tropical and subtropical terrains.

Undoubtedly the success or failure of a selective leach approach rests, initially, on the sampling strategy. If substantial amounts of another horizon are included with the target (e.g. A₂ mixed in with B or with A₁; Fig. 1), then results will be affected by the mixing ratio of two matrices. Thus, recognition of the selected horizon is critical and instructions should not be given to field personnel based solely on *depth* of sampling unless the survey area has an unusually consistent soil profile. On a global scale, Levinson (1974) makes the generalisation that: the A-horizon can range from ca. 30 cm to > 1 m in thickness; the B-horizon from ca. 5 cm to 2 m; and the C-horizon is usually thicker than A or B, exceeding 100 m in some tropical soils.

Since the scavenging phases of hydrous Fe, Mn and Al oxides occur in the fine clay and silt fraction, it is advantageous to sieve the soil to at least < 63 μm . This size fraction also serves to separate out the 'soluble organic' scavenging phase in humus material. Coatings of hydrous Fe oxide on the coarse particles of stream sediments may dictate the use of

this fraction in quantifying hydromorphically dispersed elements held in this phase (see Hale and Plant, 1994, for design concepts in drainage geochemistry). Numerous case histories comparing the geochemical response of different size fractions using 'conventional' total or near-total sample decomposition (e.g. HF-HClO₄-HNO₃ or aqua regia) have been documented in the aforementioned texts, but more study of sample preparation is needed in the application of selective leaches. Furthermore, the question of drying the sample is particularly critical when extracting a certain species of element. Redistribution of element species on drying (air-, oven-, freeze-) well aerated samples is of less concern than for anoxic samples, but nevertheless, storage of samples between collection and analysis remains an area for further investigation (Kersten and Forstner, 1989). The preference at the GSC, when collecting wet samples such as peat, is to keep them wet and cool in 'zip-lock' bags until analysis. Results are calculated on a dry-weight basis, the moisture being determined on a separate aliquot. If samples are to be dried before analysis, then air-drying is preferable to maintain the integrity of element distribution.

2. Trace element forms of interest in exploration


2.1. Adsorbed and exchangeable forms

Adsorption of metals and metalloids by soil constituents may be described as *specific* or *non-specific*. A soil's Cation Exchange Capacity (CEC) is a measure of its ability to provide sites for *non-specific* adsorption. The forces involved in the adsorption of ionic species at charged surfaces are electrostatic, governed by Coulomb's Law of Attraction and Repulsion. The CEC of most soils ranges from a few to several hundred meq/100 g and far exceeds anion exchange capacity as negative rather than positive charges dominate on colloidal surfaces. These negative charges can be classified as: (1) independent of pH, where permanent charge is due to isomorphous substitution of major element ions within 2:1 clay minerals and edge effects on clay minerals; and (2) pH-dependent charges on humus polymers and hydrous oxides (Alloway, 1990). Although the impor-

tant role played by clay minerals in the sorption of trace elements from soil solutions is widely recognised, the exact mechanisms of adsorption remain to be thoroughly clarified. Generally, a soil solid phase with a large surface area has a high CEC, as is shown in the descending CEC sequence for the clay mineral groups: montmorillonite, vermiculite (700–800 m²/g surface area and a CEC of 70–150 meq/100 g) > illite, chlorite > kaolinite > halloysite (30 m²/g, CEC of 3–50 meq/100 g). Amorphous aluminosilicates (allophane, imogolite) are probably significant adsorbers of trace elements in warm, humid climates. Clays rarely exist in soils in pure form; rather, they are bound together with humic colloids and hydrous oxide precipitates.

The negative charges on humus polymers are due to the removal of protons from carboxyl and phenolic hydroxyl groups, whereas those on the surface of hydrous oxides are created by proton dissociation from O and OH groups. Below a pH of 8, newly formed hydrous oxides of Fe and Al contribute little to the CEC of soils as the hydrogen ion concentration inhibits proton dissociation, and they have essentially no charge. In contrast, carboxyl groups in humic polymers have dissociation constants (*pK*) of 3–5 and phenolic groups have *pK* values of greater than 7. Thus, the high adsorptive capacity of humic substances at pHs above 5 contributes significantly to the overall CEC of a soil.

Specific adsorption implies the exchange of metallic cations and anions with surface ligands to form partly covalent bonds with lattice ions (i.e. not simple electrostatic attraction). Thus the degree to which metal ions are held may be much greater than that suggested by the CEC of the soil. Metals most able to form hydroxy complexes, as shown below, are specifically adsorbed to the greatest extent:



Hence, Pb with a *pK* of 7.7 is more strongly adsorbed than Cd with a *pK* of 10.1. Hydrous oxides of Fe, Mn and Al are the major soil constituents responsible for specific adsorption, though surface chelation of metals with various functional groups (e.g. –COOH, –NH₂, –C₆H₅OH) on organic substances does occur.

Although the Langmuir and Freundlich adsorption isotherms are used to quantify this overall process,

neither provides information as to the mechanisms involved and both are simplistic in that they assume a uniform distribution of adsorption sites and an absence of any reaction between adsorbed ions. The distribution of an element between soil solution and solid phases at equilibrium is governed by: (1) the density of surface binding sites for each component (e.g. clay mineral, hydrous Fe oxide); (2) the binding intensity of the metal ion to each component; (3) the abundance of each component; (4) the chemical characteristics (e.g. pH, ligands and their concentration) of the solution phase; and (5) the concentration of other ions, major or trace, competing for binding sites. In order to dissolve adsorbed elements selectively without dissolving the substrate itself (i.e. clays, hydrous oxides, humics), the adsorption equilibrium must be shifted to the free-ion side. Neutral salts such as MgCl₂, CaCl₂ and NaNO₃ are used to perform this function by displacing adsorbed metal ions. As the affinity of Group I and II cations for these sites is usually much lower than that of metal ions, a high concentration (e.g. 1 M) is often employed. In numerous studies, the cation displacement efficiency for oxic soils and sediments has been demonstrated to decrease in the order Cd > Zn > Cu ≈ Pb (Kersten and Forstner, 1989), which is consistent with the decreasing pH values of their adsorption edges. The solid-to-solution ratio (or 'dilution factor') is an important influence on desorption efficiency: the higher the dilution factor, the greater the amount of metal extracted.

In his review of speciation in soils and sediments, Pickering (1986) reported that MgCl₂ leachates typically extract very low amounts of Al, Si, Fe and organic matter, showing that attack on the substrates (clay minerals, organic matter, oxides and sulphides) is minimal. However, other reagents used for the same purpose, such as NH₄Cl and NH₄OAc, have been shown to dissolve considerable amounts of carbonates and sulphates (of Ca and Mg), an undesirable feature in this application (Robbins et al., 1984). The various affinities of neutral salts for surface binding sites generally appear to be in the order H⁺ >> Ca > Mg > Na = NH₄⁺. Thus, 1 M H⁺ would desorb more metal ions than would 1 M Mg²⁺. It should also be noted that the anion can play a role in complexation (especially for Cd); chloro-complexes of transition elements are slightly less

stable than those formed with acetate. Pickering (1986) found that 0.05 M CaCl₂ displaced 10–20% more metal ions than did 1 M MgCl₂ or 0.5 M NaCl, indicating that differences in the affinity for the sorption site (Ca > Mg > Na) was more important than chloro-complex formation. The use of CaCl₂ as an extractant seems to be limited, despite its desirable features. Kersten and Forstner (1989) have selected, admittedly arbitrarily, 1 M NH₄OAc (at a solid/solution ratio > 1:10) for 2 h to dissolve adsorbed elements. In the well-known sequential extraction scheme designed by Tessier et al. (1979), 1 M MgCl₂ at pH 7 for 1 h was chosen over: (1) 1 M NH₄OAc at pH 7, because of the latter's reputed attack on carbonates (and organics); and (2) 1 M NaOAc at pH 8.2, because complexation of Ca²⁺ (from CaCO₃) as CaOAc⁺ was again evident.

The Mobile ('unbound') Metal Ion (MMI) leach approach, described by Mann et al. (1998), is designed to release loosely held adsorbed elements, without attacking the substrate. Unlike the use of electrolytes to displace weakly bound elements, the two MMI leaches contain ligands which, through complexation, specifically bring the analytes into solution (e.g. acetate, EDTA, CN). A mildly acidic leach (proprietary to Mann's company, Wamtech), containing both organic and inorganic reagents, is employed for the metals Cu, Pb, Zn and Cd whereas a mildly basic solution, also comprising organic and inorganic ligands, is used for Au, Ag, Ni, Co and Pd. The leaches are carried out at room temperature for 24 h, apparently on large sample sizes (e.g. 100 g) sieved to remove coarse fragments (1–4 mm).

2.2. Bound to carbonates

Depending upon climate and local conditions, carbonates may be the dominant sink for some trace elements. The major control on trace element uptake by carbonates, often in metastable and polymorphic forms, is pH. Trace elements may be coprecipitated as their carbonates or, like Cd, may actually replace Ca²⁺ in the lattice. The preferred method of selective dissolution of the carbonate phase is an acidified acetate-buffered extraction, namely 1 M NaOAc/HOAc at pH 5 (Chao, 1984; Kersten and Forstner, 1989; Hall et al., 1996a). Robbins et al. (1984) have shown that this buffering capacity is

sufficient to dissolve all the calcite in a carbonate-rich (68% CaCO₃) sediment, resulting in a final pH of 5.5 with a solid/solution ratio of 1:40. The method used at the GSC involves 6 h of constant agitation, at a ratio of 1:20, to ensure complete dissolution of the carbonate phase.


In soils, the greatest affinity for reaction with carbonates has been observed for Co, Cd, Cu, Fe, Mn, Ni, Pb, Sr, U and Zn; up to 1000 ppm of Sr and Co may occur in secondary calcite minerals (Kabata-Pendias and Pendias, 1984). In determining the carbonate-bound trace elements in marine sediments, Span and Gaillard (1986) found that only Cd and Mn correlated well with Ca. The other elements, Fe, Mn, Pb and Zn, were inferred to be only weakly associated, probably simply adsorbed and therefore would have been removed by prior application of a MgCl₂ or NH₄OAc leach.

2.3. Bound to 'soluble' organic matter (humic and fulvic component)

The bulk of organic matter in most soils consists of humic substances: amorphous, brown or black, hydrophillic, acidic, polydisperse substances of molecular weights ranging from several hundreds to tens of thousands. They are usually classified into three groups: humic acids, soluble in dilute alkaline solution; fulvic acids, soluble in acid and alkali; and humin, insoluble in dilute acid or base. These groups are structurally similar, but differ in molecular weight and functional group content, with the fulvic fraction having a lower molecular weight but higher content of oxygen-containing functional groups per unit weight than the others. Important characteristics of these compounds include their ability to form water-soluble and insoluble salts, and complexes with metal ions and hydrous oxides, and to interact with clay minerals (for thorough review, see Schnitzer and Khan, 1972).

The term 'organically bound' metal covers a broad spectrum of binding mechanisms, including adsorption, complexation and chelation. The high scavenging capacity of these organic substances is usually attributed to their carboxylic acid (COOH) functional groups, with contributions from other groups such as -NH₂ (amino) and -SH (thiol). The maximum amount, based on equivalents, of any given metal

bound is approximately equal to the number of carboxyl groups. The total binding capacity of marine humic acid for metal ions was determined to be 200–600 $\mu\text{mol/g}$ (Kersten and Forstner, 1989). Metals adsorbed on the surfaces of humic substances are removed by extraction with MgCl_2 or NH_4OAc (see Section 2.1); a stronger attack is required to bring complexed or chelated metals into solution for analysis. Two approaches are employed: destruction of the organic matter by oxidation with reagents such as H_2O_2 or NaOCl ; or the use of an alkaline complexing agent such as $\text{Na}_4\text{P}_2\text{O}_7$, sodium pyrophosphate. The former approach has drawbacks in that other phases such as sulphides, Mn oxides and silicates can be partially dissolved and precipitation (e.g. as oxalates, hydroxides) may occur. The action of a neutral salt such as $\text{Na}_4\text{P}_2\text{O}_7$ in the extraction of humic substances depends upon: (1) the ability of the anion to interact with Ca, Fe and Al and other polyvalent cations combined with the humic material, to form either insoluble precipitates (e.g. $\text{Ca}_2\text{P}_2\text{O}_7$) or soluble complexes with the metals; and (2) the formation of soluble salts of the humic material by reaction with the cation. This is represented as, where $X = \text{Fe}$ or Al and R is the organic molecule:

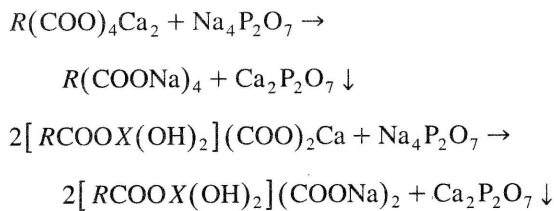

At a relatively high pH of 10, 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ does not dissolve amorphous Fe oxides (Bascomb and Thanigasalam, 1978). Results for Fe, however, may be erroneously high for some samples due to peptisation and dispersion of finely divided ferruginous particles present in the soil (Jeanroy and Guillet, 1981). Ultracentrifugation or ultrafiltration would negate this error, but the extra effort compared to simple centrifugation prior to analysis seems impractical for exploration purposes as Fe is not a critical analyte. Previous work has shown that the 16 h extraction often employed by soil scientists (McKeague et al., 1971) could be reduced to 1 h without significant decrease in the amount of Co, Cu, Fe, Ni,

Pb or Zn extracted (Hall et al., 1996b). Thus, a 1 h 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ leach at room temperature and a sample-to-solution ratio of 1:100 (g:ml) is recommended for extraction of the labile organic component of humus, soil or sediment samples.

The earliest reagent applied to extract humic substances is NaOH and remains that suggested by the International Humic Substances Society, despite its drawbacks. These disadvantages include: unacceptable dissolution of clay minerals; and the metals' tendency to hydrolyse and readsorb onto reactive surface sites following removal of their organic coatings (Kersten and Forstner, 1989). In a comparison study of the 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ leach at pH 10 and 0.5 M NaOH at pH 12, Hall and Pelchat (1997a) demonstrated that there was minimal change in the amount of organic C, Hg or Zn leached from reference lake sediment, LKSD-4, when parameters of sample weight-to-reagent volume (w/V) and contact time are altered. In contrast, the 0.5 M NaOH leach showed an exponential increase in Hg and Zn extracted with decrease in w/V which did not correspond to the behaviour of organic C. Clearly the two reagents are extracting different groups of organic substances and results for both cannot be equated to the same nominal phase. A sequential extraction procedure developed by Schnitzer and Schuppli (1989), to define various organic fractions in soil, placed 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ before 0.5 M NaOH to dissolve organic matter complexed specifically to metals and clays as opposed to 'free' organic matter including less decomposed material which would finally be leached with the latter reagent.

2.4. Bound to Mn oxides


Although most soils contain much greater amounts of Fe oxides than Mn oxides, the latter possess greater sorption capability for trace elements. Such reactivity is due to characteristics of Mn such as: (1) it exists in several oxidation states (II, III, IV); (2) it forms non-stoichiometric oxides with different valencies; (3) its higher valence oxides exist in several crystalline (e.g. birnessite, lithiophorite, pyrolusite) or pseudocrystalline (manganite) forms; and (4) it forms coprecipitates and solid solutions with Fe oxides, owing to their similar chemical properties (Chao and Theobald, 1976). Although crystalline forms of

Mn oxide do occur in soils, the predominant species are amorphous (Kabata-Pendias and Pendias, 1984). Manganese oxides can have surface areas of several hundred m^2/g and larger CECs than some clay minerals (e.g. in the order of 150 meq/100 g). The internal structure of poorly crystallised Mn oxides can have an effect on the uptake of trace elements. For example, Anderson et al. (1973) found that the uptake of Ag by such Mn oxides depended upon the amount of internal Na and K, indicating exchange of these elements by Ag. In a study by Loganathan and Burau (1973) of the adsorption by synthetic hydrous Mn oxide of Co, Zn, Ca and Na, Mn was released to solution during the adsorption of the first two elements but not the latter. It was deduced that Co interchanged with surface-bound H and structural Mn^{2+} and Mn^{3+} , Zn with H and Mn^{2+} , and Ca only with H.


The relative importance of Mn and Fe oxides as scavengers will depend upon: (1) pH–Eh conditions; (2) degree of crystallinity of the oxides and hence their reactivity; (3) their relative abundances; (4) the presence of organic matter as a competing adsorbing and chelating fixing agent. Thus, elements will show a preference for uptake by either Mn or Fe oxide depending upon local conditions, as demonstrated in a study of uptake of Cu in a suite of soils (McLaren and Crawford, 1973). Removal of Cu from solution followed the order Mn oxides > organic matter > Fe oxides > clay minerals.

Selective extraction of Mn oxides and Fe oxides is usually based upon progressively increasing the reducing strength of the reagent, hydroxylamine hydrochloride being the popular choice. Two pH levels, 2 and 4.5, in a matrix of 0.1 M $\text{NH}_2\text{OH} \cdot \text{HCl}$ have been widely employed according to the literature (Chao, 1984). Manganese oxides are efficiently dissolved by agitation of the sample with 0.1 M $\text{NH}_2\text{OH} \cdot \text{HCl}$ in 0.01 M HNO_3 at a solid/solution ratio of ≥ 50 for 30–60 min at room temperature (Chao, 1972). Freshly precipitated hydrous Fe oxide may dissolve to a few percent, whereas dissolution of crystalline Fe oxides is negligible. Some authors replaced the unbuffered 0.01 M HNO_3 (pH 2) medium with 1 M NH_4OAc buffered at pH 4.5 (Gatehouse et al., 1977; Sondag, 1981). The extraction designed by Chao (1972) is rapid, simple to carry out, inexpensive and easy to automate.

The 'Enzyme Leach', marketed by Activation Laboratories (Ancaster, ON, Canada), is designed to solubilise selectively the most reactive forms, amorphous and pseudocrystalline, of Mn oxides present in soils and sediments. The key feature is that hydrogen peroxide is produced in relatively small concentrations (< 0.01 M) in which state it acts as a weak reducing (rather than oxidising) agent. The leach solution comprises essentially glucose (or dextrose) and glucose oxidase (Clark, 1993; US Patent 5491078). The enzyme catalyses the reaction of the sugar with oxygen (air) and water, to form gluconic acid and hydrogen peroxide:



Hydrogen peroxide then reacts with the most reductive forms of Mn oxide and H^+ (from gluconic acid) to produce soluble manganous ions:



Gluconic acid has the advantage that it can stabilise some metals by complexation. Typically, 15 ml of leach solution containing 1% glucose and 0.03% glucose oxidase are added to 1 g of sample, the mixture periodically agitated during the 1 h extraction and finally centrifuged. The solution is made 1% in HNO_3 to inhibit precipitation of trace elements prior to analysis by ICP–MS. Acidification, however, causes rapid volatilisation of halides as halogen gases and thus is avoided if these elements (Cl, Br, I) are to be determined. A modification of the Enzyme leach involves the addition of ascorbic acid to the extractant (to a concentration of 0.1%) in order to lower the oxidation potential of the mixture (by destroying excess H_2O_2). (The enzyme, catalase, performs the same function but does not lower the oxidation potential as much.) The modified leach then dissolves more Mn oxide and amorphous Fe oxide, though the degree to which this occurs is unclear. In general terms, the leach modified with ascorbic acid appears to dissolve about an order of magnitude more Mn (US Patent 5491078). A weak feature of the Enzyme leach is that it is unbuffered; hence a significant change in pH amongst the soil samples analysed will cause a change in the amount of element extracted.

Table 2
Summary of forms of elements and common approaches to their dissolution

Form of element	Binding	Dissolution
Adsorbed/exchangeable	<p><i>Non-specific</i> (quantified by CEC), through electrostatic attraction: (1) pH-independent (e.g. on clays); and (2) pH-dependent (negative charges on humus polymers and, to a lesser extent, on hydrous oxides).</p> <p><i>Specific</i>: partial covalent bonding, especially with hydrous oxides of Fe, Mn and Al.</p>	<p>By displacement rather than dissolution of phase itself. Reagents such as 1 M MgCl₂, 0.1 M CaCl₂, 1 M NH₄OAc (pH 7) and 1 M NaOAc (pH 8.2).</p> <p>Affinity for displacement in the order of $H^+ \gg Ca^{2+} > Mg^{2+} > Na^+ = NH_4^+$. Also MMI-A and MMI-B proprietary reagents.</p> <p>Two approaches: via <i>dissolution</i> of organics using 0.1 M Na₄P₂O₇ at pH 10 at room temperature (preferable to NaOH which also dissolves clays); or via <i>destruction</i> of organics using NaOCl or H₂O₂ (these are less specific, attacking sulphides, etc.).</p>
Organically bound	<p>Besides being <i>adsorbed</i> to humates and fulvates, elements form 1:1 or 1:2 complexes through -COOH (mainly), NH₂ and SH functional groups.</p>	<p>By reducing agents: hydroxylamine hydrochloride, 0.1 M NH₂OH·HCl in 0.01 M HNO₃ at room temperature; or by the commercialised Enzyme leach where H₂O₂ is the reducing agent.</p>
With Mn oxides	<p>Variety of mechanisms including: adsorbed onto, coprecipitated with, occluded in, isomorphous substitution for Mn, to give a wide range of bond strengths. Mn often occurs as a mixed oxide with Fe.</p>	<p>By reducing agents: hydroxylamine hydrochloride, 0.25 M NH₂OH·HCl in 0.1 M HCl at 60°C; or Tamm's reagent, ammonium oxalate in the dark.</p>
With hydrous Fe oxides	<p>Variety of binding mechanisms as with Mn oxide above. Hydrous Fe oxide also adsorbs anions (e.g. molybdates, selenites).</p>	

Whether it is preferable to dissolve only the more 'reactive' forms of Mn oxide to highlight previously mobile elements is a moot point since the scavenging capacities of all forms of Mn oxide are considerable. Both the hydroxylamine hydrochloride and the Enzyme leaches can also be considered to dissolve loosely adsorbed elements.

2.5. Bound to amorphous Fe oxides

The degree of fixation of trace elements by Fe oxides ranges from adsorption at the surface, through coprecipitation, to relatively strong binding within the oxide structure. As with Mn, the geochemistry of Fe in the terrestrial environment is complex, its behaviour being closely linked with the cycling of O, C and S (Taylor, 1990). Amorphous Fe oxide ($\text{Fe}(\text{OH})_3 \cdot n\text{H}_2\text{O}$) is chemically more reactive than its pseudocrystalline and crystalline forms, which provides the basis for its chemical separation. For example, moderate reducing conditions are required for dissolution of amorphous Fe oxides compared to those for poorly crystallised goethite ($\alpha\text{-FeOOH}$) or lepidocrocite ($\gamma\text{-FeOOH}$), whereas highly crystallised magnetite (Fe_3O_4) and hematite (Fe_2O_3) require a strong reductant or aggressive attack.

Chao and Zhou (1983) compared the specificity of reagents in the extraction of amorphous Fe oxyhydroxides from soils and sediments and concluded that hydroxylamine hydrochloride was optimal. Design of the GSC protocol for this phase was based largely on their findings, supported by later work. Their results confirmed that Tamm's reagent (0.175 M ammonium oxalate in oxalic acid at a pH of 3.2) in the dark was selective for amorphous Fe oxide only in the absence of magnetite and organic complexes. Magnetite is known to contain a host of trace metals and hence its dissolution is undesirable (Overstreet et al., 1978). Dissolution of magnetite by Tamm's reagent was also demonstrated by Borggaard (1982) who recommended the selective extraction of amorphous Fe oxides to be carried out using 0.02–0.1 M EDTA at pH 8–10 over a time period of > 30 days, hardly practical. Although extraction of amorphous Fe oxides in 1 M HCl for 30 min at room temperature appears to be specific for amorphous Fe oxide with respect to crystalline Fe oxides (dissolves < 1% of the hematite, goethite and magnetite miner-

als tested), this attack may well bring into solution metals from clays, amorphous allophanic materials and some sulphides (Chao and Zhou, 1983). They demonstrated that, after about 30–60 min in 0.25 M $\text{NH}_2\text{OH} \cdot \text{HCl}$ /0.25 M HCl at 70°C, further dissolution of the two amorphous Fe oxides examined (synthetic and natural) was minimal while < 1% of the crystalline Fe oxides was dissolved except for one magnetite (ca. 2%). They concluded that this was the optimum, most selective extraction but reduced the temperature to 50°C to minimise the degree of dissolution of the crystalline Fe oxides below 1% total Fe.

Extensive application of the 0.25 M $\text{NH}_2\text{OH} \cdot \text{HCl}$ leach (at 60°C) at the GSC showed that the selectivity of the procedure should be improved (Hall et al., 1996a). Firstly, the acidity of the HCl medium should be reduced from 0.25 to 0.05 M in the presence of sulphides such as galena and sphalerite, to minimise their dissolution to < 1%. This less acidic pH is still low enough to prevent reprecipitation of Fe but should probably be monitored when the leach is applied to highly alkaline samples. Secondly, significant dissolution of the labile organic component occurs, as shown by the C concentration in solution for the reference sample LKSD-4, at 63% of that extracted by 0.1 M sodium pyrophosphate solution. Clearly, where the organic component of a sample is comparable in concentration to the amorphous Fe oxide phase, the pyrophosphate leach should precede the hydroxylamine hydrochloride extraction if specificity is desired. The GSC protocol involves leaching of a 1 g sample in 20 ml of 0.25 M $\text{NH}_2\text{OH} \cdot \text{HCl}$ in 0.1 M HCl at 60°C for 2 h, followed by centrifuging of the mixture at ≥ 2000 rpm for 10 min. This leach also dissolves the Mn oxide phase.

Table 2 summarises the forms of elements discussed above, and common approaches to their dissolution.

3. Analytical figures of merit

As previously stated, the accuracy obtained in selective leaching is difficult to assess. Even the use of separate minerals to test the degree of concurrent dissolution is subject to criticism as it does not take

into account the confounding, interactive effects of other phases present in soils and sediments. Precision is much easier to measure and, from experience at the GSC is, perhaps surprisingly, comparable to that obtained for total element content. The reproducibility of sampling, preparation and methodology impact on the final precision. Variability at the analysis step is usually the minimum component, unless the element concentration is near the instrumental detection limit. These limits are mostly in the ppt (ng l^{-1}) and ppb ($\mu\text{g l}^{-1}$) range in analysis by ICP-MS, several decades below those of ICP-ES. Previous applications (Hall et al., 1996a,b) have shown that ICP-ES has been adequate for elements such as Zn and Cu bound to organic material in humus or to amorphous Fe oxide but the less abundant elements (e.g. Cd, Pb, Ag) require ICP-MS, especially in the application of the Enzyme and MMI leaches.

3.1. Precision associated with the $\text{Na}_4\text{P}_2\text{O}_7$ leach for organically bound elements

The previous report (Hall et al., 1996b) for two in-house humus control samples and the international standard reference lake sediment, LKSD-4, demonstrated long-term relative standard deviations in the range 2–7% when element concentrations were a decade above instrumental detection limits. Similar precision was shown by replicate samples of 37

humus samples sieved to < 80 mesh ($177 \mu\text{m}$). However, data obtained by AAS and ICP-ES for some trace elements such as Co, Cu and Ni showed poor precision, in the order of 20–50% RSD at several ppm of the organically bound element. This was due to the relative insensitivity of the analytical technique employed, rather than to inherent variability in the method itself. Later work, using direct ICP-MS to determine most elements in the LKSD-4 control sample, demonstrated that precision (as measured over several months) could be improved to be better than 10% RSD for these elements. The data in Table 3 show that RSDs for most elements are in the range 1–7%, the exceptions being for Sb, Tl and As which, however, remain acceptable at 12–19%. Note the excellent reproducibility for Hg, determined by cold vapour ICP-MS, of $\pm 7\%$ at the 14 ppb level in LKSD-4. In order to minimise instrumental drift, the ICP-MS method is based on a 50-fold dilution of the leached solution, thereby producing an overall dilution factor of 5000. This limits the capability to measure some elements at their true 'background' levels in this leach. For example, method detection limits of As and Sb — at 500 and 50 ppb (ng g^{-1}), respectively, by direct ICP-MS — should be improved by several orders of magnitude by employing hydride generation ICP-MS (Hall et al., 1997a).

The reproducibility of results obtained for 'real' humus samples, sieved to $< 177 \mu\text{m}$, is expected to

Table 3
Mean and standard deviation (SD) for elements bound to soluble organic phase in LKSD-4 ($n = 4$) (0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ leach) (units as shown by detection limit, DL)

Element (DL)	Mean \pm SD (%RSD)	Element	Mean \pm SD (%RSD)
Ti (1 ppm)	65.0 \pm 1.8 (3)	Ba (1 ppm)	13.5 \pm 0.57 (4)
V (0.5 ppm)	10.7 \pm 0.3 (3)	Ce (0.05 ppm)	24.6 \pm 0.8 (3)
Cr (0.5 ppm)	2.9 \pm 0.2 (7)	Tl (25 ppb)	189 \pm 35 (19)
Co (0.1 ppm)	1.71 \pm 0.13 (8)	Pb (0.5 ppm)	55.2 \pm 0.8 (1)
Cu (0.5 ppm)	7.6 \pm 0.3 (4)	Th (25 ppb)	1148 \pm 15 (1)
Zn (2 ppm)	63.5 \pm 1.3 (2)	U (0.02 ppm)	23.2 \pm 0.6 (2)
Rb (0.2 ppm)	0.62 \pm 0.01 (2)	As (0.5 ppm)	3.6 \pm 0.4 (12)
Sr (2 ppm)	24.0 \pm 0.8 (3)	Mn (2 ppm)	202 \pm 4 (2)
Y (0.05 ppm)	11.4 \pm 0.46 (4)	Fe (15 ppm)	3195 \pm 50 (1)
Mo (250 ppb)	770 \pm 48 (6)	Al (15 ppm)	2664 \pm 47 (2)
Cd (250 ppb)	654 \pm 41 (6)	Hg (6 ppb)	14.2 \pm 0.9 (7)
Sb (50 ppb)	218 \pm 26 (12)	C _{org} (0.1%)	2.32 \pm 0.03 (2)

Most elements determined by direct ICP-MS, the exceptions being: Mn, Fe and Al by ICP-ES; Hg by cold vapour ICP-MS; and C_{org} by IR spectrometry.

Table 4
Results for field and analytical duplicates for 0.1 M Na₄P₂O₇ leach of humus samples from the Restigouche deposit, New Brunswick

Dup.	Cu, ppm	Zn, ppm	Cd, ppb	Ba, ppm	Ce, ppb	Pb, ppm	U, ppb	As, ppm	Hg, ppb	C _{org} , %
<i>Field duplicates</i>										
11	2.8/1.6	69/80	472/507	64/67	767/701	52/46	62/51	< 0.5/< 0.5	30/24	2.82/2.44
14	2.0/1.9	50/48	370/371	51/44	669/680	42/58	51/52	< 0.5/0.9	21/35	2.42/2.88
28	1.6/2.3	70/91	627/622	55/71	909/882	69/59	67/94	2.8/1.9	20/28	2.24/2.59
38	1.9/1.8	48/44	848/689	127/154	1160/1358	35/42	65/40	0.8/0.8	53/44	3.20/3.00
<i>Analytical duplicates</i>										
04	2.6/2.8	23/22	279/< 250	20/22	836/972	19/22	101/109	1.3/1.0	38/37	3.52/3.52
18	2.7/3.1	81/86	832/790	88/91	818/824	51/54	109/76	2.0/1.9	34/33	3.12/3.04
26	2.9/2.4	164/153	846/899	74/73	1124/1118	117/117	74/83	14.6/14.8	38/40	3.56/3.54
43	1.1/0.9	33/31	261/275	64/62	596/606	34/32	55/79	0.6/1.3	58/55	3.42/3.32

be inferior to that shown by an SRM (e.g. as in Table 3). Examples of both field and analytical duplicate data obtained in a humus survey over the Restigouche volcanogenic massive sulphide deposit (Zn–Pb–Ag–Cu) are given in Table 4. Two humus samples taken within several metres of each other constitute *field* duplicates, whereas an *analytical* duplicate is taken as a separate 1 g sample after sieving. The data in Table 4 indicate that analytical precision for these humus samples is comparable to that shown by the control, LKSD-4, and, perhaps more importantly, is only slightly superior to that of field sampling and analytical precision combined. Instrumental variability, as measured by replicate analysis of the same leach solutions, is typically only 1–3%.

3.2. Precision associated with the NH₂OH · HCl leach for oxide-bound elements

As happened during the development of the pyrophosphate leach, the initial values obtained for the precision typical of the 0.25 M NH₂OH · HCl leach (for amorphous Fe and Mn oxides) suffered from the use of ICP–ES rather than ICP–MS. At concentrations at least a decade above detection limits, long-term (over 18 months) RSDs for 14 elements in two till SRMs were in the range 6–18% (Hall et al., 1996a). Typical precision values shown by 75 soil and till analytical duplicates were: 10% (i.e. ±5% RSD) for Al and Y; 15% for Ca, Cr, Fe and Sr; 20% for Ba, Cu, La, V and Zn; 25% for Mg, Mn and Ni; and 30% for Co and Pb, which are present at levels

below about 10 ppm in this phase. Precision is greatly improved when ICP–MS is employed, particularly as the overall dilution factor required is only 500 (cf. 5000 for the Na₄P₂O₇ leach) and consequently detection limits are excellent. Table 5 shows more data from the survey at Restigouche, indicating that RSDs for the SRM TILL-2 (over a 2-month period) were in the range 0.5–8% for 33 elements. Only Te suffered from an inadequate detection limit of 0.2 ppb, creating significant analytical variability at the 0.5 ppb level (Table 5). The SRMs, TILL-2 and TILL-3, were interspersed in a batch of samples submitted for Enzyme leach/ICP–MS analysis at Activation Laboratories; their data are presented in Table 6. Here most RSDs are in the range 3–19%, the noticeable exceptions being for Cd (25%) and Bi (80–100%) present at concentrations close to detection limits. A major contributor to the inferior precision by this leach compared to the 0.25 M NH₂OH · HCl leach for amorphous Fe oxide is the analytical variability at the much lower levels of elements present. Note the much lower amount of Mn extracted from TILL-2 (6 vs. 326 ppm).

The survey of B-horizon soils over the Restigouche deposit provides more examples of field and analytical duplicate data for the 0.25 M NH₂OH · HCl/0.1 M HCl leach of the amorphous Fe oxide phase (Tables 7 and 8). This suite of samples was analysed for the Mn oxide phase using the Enzyme leach at Activation Laboratories; these data are also shown in Tables 7 and 8. In this instance, the precision associated with analytical duplicates is comparable to the good precision shown in the previ-

Table 5

Mean and standard deviation (SD) for elements bound to amorphous Fe (and Mn) oxide phase in TILL-2 ($n = 5$) (0.25 M $\text{NH}_2\text{OH} \cdot \text{HCl}/0.1$ M HCl leach) (units as shown by detection limit, DL)

Element (DL)	Mean \pm SD (%RSD)	Element	Mean \pm SD (%RSD)
Li (2 ppb)	1712 \pm 72 (4)	Ba (0.08 ppm)	61 \pm 0.3 (0.5)
Be (2 ppb)	542 \pm 28 (5)	La (4 ppb)	5748 \pm 44 (0.7)
Ti (0.2 ppm)	18.3 \pm 0.4 (2)	Ce (0.004 ppm)	15.2 \pm 0.07 (0.5)
Cr (0.04 ppm)	3.75 \pm 0.15 (4)	Hf (4 ppb)	75.2 \pm 2.1 (3)
Co (0.02 ppm)	4.09 \pm 0.04 (1)	Tl (2 ppb)	65.8 \pm 2.5 (4)
Ni (0.08 ppm)	2.81 \pm 0.10 (3)	Pb (0.1 ppm)	12.9 \pm 0.2 (2)
Cu (0.04 ppm)	35.7 \pm 0.7 (2)	Th (20 ppb)	856 \pm 64 (8)
Zn (0.2 ppm)	14.6 \pm 0.6 (4)	U (2 ppb)	658 \pm 37 (6)
Rb (0.02 ppm)	5.01 \pm 0.10 (2)	I (50 ppb)	1062 \pm 66 (6)
Sr (0.2 ppm)	7.22 \pm 0.12 (2)	Bi (1 ppb)	1912 \pm 35 (2)
Y (4 ppb)	4695 \pm 146 (3)	Sb (1 ppb)	17.0 \pm 1.1 (7)
Zr (0.02 ppm)	1.71 \pm 0.02 (1)	Te (0.2 ppb)	0.50 \pm 0.10 (23)
Nb (4 ppb)	133 \pm 6 (5)	As (10 ppb)	1599 \pm 126 (8)
Ag (20 ppb)	226 \pm 5 (2)	Hg (0.2 ppb)	6.3 \pm 0.8 (12)
Cd (20 ppb)	180 \pm 11 (6)	Mn (0.1 ppm)	326 \pm 5 (2)
In (4 ppb)	25.3 \pm 1.9 (8)	Fe (6 ppm)	5944 \pm 247 (4)
Cs (4 ppb)	582 \pm 16 (3)	Al (30 ppm)	7255 \pm 180 (2)

Elements not determined by direct ICP-MS comprise: Bi, Sb, Te and Hg by hydride (or Hg^0) generation ICP-MS; As by hydride generation QTAAS; Mn, Fe and Al by direct ICP-ES.

ous table for TILL-2, but is noticeably better than that shown by field duplicates. It is interesting that the behaviour is element-specific and is certainly independent of concentration level. For example, field duplicate data for Cr, Ti, Zn, Y and Fe are

relatively 'noisy' whereas those for Pb, Th, U, Sb and Hg are excellent in the same samples (sample 38 appears to be the worst case overall). Note that the amount of amorphous Fe extracted in the field duplicates varies more than any other element but is

Table 6

Mean and standard deviation (SD) for SRMs TILL-2 ($n = 4$) and TILL-3 ($n = 3$) by Enzyme leach and ICP-MS (all data in ppb except for Cl and Mn in ppm)

Element (DL)	Mean \pm SD (%RSD) for TILL-2	Mean \pm SD (%RSD) for TILL-3
Cl (3 ppm)	22.94 \pm 1.95 (9)	21.74 \pm 2.06 (9)
Mn	6.21 \pm 1.21 (19)	4.75 \pm 0.40 (8)
Co	51 \pm 5 (10)	83 \pm 10 (12)
Ni	32 \pm 6 (19)	94 \pm 7 (7)
Zn	183 \pm 18 (10)	168 \pm 20 (12)
As (5 ppb)	21 \pm 1 (5)	887 \pm 81 (9)
Br (30 ppb)	1033 \pm 52 (5)	301 \pm 16 (5)
Cd (0.2 ppb)	4.8 \pm 1.2 (25)	0.8 \pm 0.2 (25)
I (10 ppb)	155 \pm 4 (3)	126 \pm 5 (4)
Ba	1733 \pm 161 (9)	508 \pm 67 (13)
La (1 ppb)	60 \pm 5 (8)	30 \pm 1 (3)
Pb (1 ppb)	29 \pm 2 (7)	45 \pm 5 (11)
Bi (1 ppb)	5 \pm 4 (80)	3 \pm 3 (100)
Th (1 ppb)	11 \pm 1 (9)	7 \pm 2 (28)
U (1 ppb)	10 \pm 1 (10)	5 \pm 1 (20)

All subsamples submitted in the same batch (i.e. short-term precision).

New Brunswick

b	C_{org} , %
	2.82/2.44
	2.42/2.88
	2.24/2.59
	3.20/3.00
	3.52/3.52
	3.12/3.04
	56/3.54
	42/3.32

Precision is employed, partic- required is only (h) and conse- Table 5 shows che, indicating er a 2-month 33 elements. detection limit ical variability SRMs, TILL-2 ch of samples S analysis at presented in ange 3–19%, (25%) and Bi lose to detec- inferior preci- M $\text{NH}_2\text{OH} \cdot$ the analytical of elements t of Mn ex- er the Res- ples of field 5 M NH_2OH ous Fe oxide samples was the Enzyme data are also instance, the duplicates is in the previ-

Table 7
Results for field and analytical duplicates for 0.25 M NH₂OH · HCl/0.1 M HCl leach of B-horizon soils

Dup.	Li	Be	Ti	Cr	Co	Ni	Cu	Zn	Rb	Sr	Y	Zr	Nb	Ag	Cd	In	Cs
<i>Field duplicates</i>																	
11A	361	291	4.11	5.68	227	959	856	8.7	1.88	1058	531	2.25	27	528	102	24	46
11B	328	341	2.83	4.68	327	1146	815	12.2	2.09	1018	708	1.99	211	474	107	18	36
11A					23	80	18	0.509	0.179	188	6	0.011			6.4		
11B					24	68	16	0.472	0.211	170	8	0.008			4.7		
14A	341	144	6.46	6.90	285	793	1063	11.5	1.12	480	337	1.71	50	258	93	32	25
14B	302	222	5.21	6.09	368	786	1095	14.9	1.64	440	420	2.039	37	267	110	27	49
14A					29	70	28	0.990	0.134	54	5	0.015			5.5		
14B					19	44	24	0.746	0.086	39	3	0.011			3.4		
38A	323	196	2.43	4.33	985	828	516	9.6	1.50	564	520	1.11	20	143	154	21	53
38B	178	245	2.49	3.38	878	1060	560	16.0	1.90	351	811	1.13	11	152	152	9	47
38A					28	55	< 5	0.476	0.087	151	6	0.011			12.1		
38B					20	52	< 5	0.402	0.096	114	6	0.002			13.2		
<i>Analytical duplicates</i>																	
8A	62	664	4.09	3.12	4656	1754	395	8.3	1.25	1661	927	1.02	23	95	326	11	33
8B	76	678	4.30	3.07	4827	1767	412	8.3	1.24	1648	946	0.99	23	97	342	10	36
68A	363	163	1.99	6.22	1172	820	1627	10.2	2.65	209	1016	1.83	12	78	157	29	68
68B	353	149	1.94	5.82	1099	756	1615	9.6	2.58	201	988	1.75	11	74	158	27	63
93A	373	240	2.37	10.2	2320	1825	809	13.8	1.43	433	580	0.70	6	137	115	10	37
93B	369	255	2.45	9.89	2312	1700	905	13.8	1.37	436	592	0.67	5	131	125	11	34
100A	340	344	5.25	6.02	2312	1800	1651	31.7	2.68	468	625	1.71	20	507	324	27	57
100B	340	339	5.48	6.18	2443	1830	1547	31.7	2.58	493	636	1.71	20	495	323	26	55

Data shown in italics are by the Enzyme leach; all data, by ICP-MS, are in ppb except for Ti, Cr, Zn, Rb and Zr in ppm.

consistent in the analytical duplicates. The much greater amount of Fe extracted in sample 38A (0.54 vs. 0.19% in 38B) is not reflected in a greater amount of trace elements released, suggesting perhaps that the scavenging capability of this phase is far from saturated at these levels. A consistent and relatively elevated concentration of Al is evident in all duplicate results.

As expected, the concentrations of elements released from the Mn oxide phase dissolved by the Enzyme leach are 1-3 orders of magnitude lower than those released from the combined Fe and Mn oxide phase (Tables 7 and 8). Thus, the Enzyme leach demands higher analytical performance than does the acidic NH₂OH · HCl leach. The greatest differential in trace element concentration between the two phases exists for Pb, Th, Y, Zr and the REEs, and the least for elements such as I, Sb and As. In scanning the complete data set for the 102 B-horizon soil samples at Restigouche, one observes that the Fe released from the combined amorphous Fe and Mn oxide phase ranges from 0.18 to 1.7%,

whereas the corresponding Mn dissolved by the Enzyme leach from the 'host' oxide phase ranges from 0.3 ppm to > 999 ppm. The scavenging capacity attributable to a Mn content of less than a ppm is negligible and, hence, the interpretation of these data is in doubt. For example, a sample containing 0.3 ppm Mn also reports 0.5 ppm Zn, 4.6 ppm Cl, 0.9 ppm Ba and 1.1 ppm Pb by the Enzyme leach; clearly the results reflect dissolution of other phases.

A study of geochemical signatures in soils in Nevada (Hall et al., 1997b) provides more quality-control data, specifically to compare the precision of analytical duplicate results obtained by application of the two NH₂OH · HCl leaches designed to dissolve (1) the Mn oxide phase and (2) the combined amorphous Fe and Mn oxide phase. Thompson and Howarth (1978) log-log plots have been used to estimate precision for some selected elements in 24 analytical duplicate soil samples (Fig. 3). The control line has been drawn at the 95th percentile for the precision (twice the RSD) indicated. For the most part, RSDs are similar between the two leaches and

Table 8
Results for field and analytical duplicates for 0.25 M NH₂OH · HCl/0.1 M HCl leach of B-horizon soils

Dup.	Ba	La	Ce	Hf	Tl	Pb	Th	U	I	Bi	Sb	Te	As	Hg	Mn	Fe	Al
<i>Field duplicates</i>																	
11A	11.3	921	1625	103	21	65	1045	123	1204	5	6	<0.2	6	4.1	6.0	0.547	1.84
11B	13.0	1411	2323	93	19	57	965	102	1349	3	6	<0.2	23	3.8	5.6	0.344	1.81
11A	0.36	7	16				0.133	5	2	90	<1		9		0.64		
11B	0.42	12	20				0.092	4	2	66	<1		5		0.49		
14A	16.1	804	1364	79	18	17	864	106	1579	6	7	<0.2	27	5.0	40	0.910	1.47
14B	13.8	873	1528	94	20	13	915	104	1614	4	8	<0.2	18	4.8	41	0.546	1.69
14A	0.43	7	16				0.029	5	2	73	<1		11		2.11		
14B	0.39	7	12				0.029	5	2	74	<1		12		1.33		
38A	19.7	689	1159	50	26	5.9	459	122	1547	9	39	<0.2	219	4.2	163	0.539	1.38
38B	21.4	801	1399	53	30	5.5	435	124	1558	6	42	<0.2	277	3.5	124	0.191	1.36
38A	0.96	6	10				0.008	4	2	130			6		7.09		
38B	1.30	5	10				0.006	3	2	143			<5		6.59		
<i>Analytical duplicates</i>																	
8A	35.1	1215	1793	45	28	4.6	232	33	2536	<1	11	0.3	22	3.6	513	0.514	1.90
8B	34.3	1214	1815	45	27	5.0	251	37	2465	1	11	0.3	16	3.5	510	0.501	1.87
68A	14.2	927	1656	87	23	8.4	1281	170	1218	6	19	<0.2	52	5.1	93	0.336	1.49
68B	13.7	894	1588	85	21	8.4	1226	174	1068	7	19	<0.2	74	4.9	97	0.334	1.54
93A	21.0	651	1076	32	13	10.8	251	71	861	2	15	0.3	103	4.5	72	0.278	1.56
93B	21.5	649	1090	31	12	10.9	292	75	1054	3	15	0.2	103	4.5	71	0.247	1.53
100A	17.3	847	1837	86	34	49.7	759	122	1190	6	14	<0.2	121	7.5	86	0.353	1.44
100B	17.6	837	1840	87	33	51.5	889	123	1393	6	14	<0.2	126	7.7	89	0.347	1.47

Data shown in italics are by the Enzyme leach; all data are in ppb except for Ba, Pb, Mn in ppm and Fe and Al in %.


in the range 5–10% except for: I (at $\pm 20\%$) which tends to suffer from memory effects during analysis; and elements present at levels close to detection limits, such as Cu in the Mn oxide phase. In these soils, elements predominantly associated with the Mn oxide phase include Mo, Cd, Th, U, As, I, Sr and Ba whereas those at much higher concentrations when the amorphous Fe oxide phase is analysed include Be, Cu, Pb, Al, Y and the REEs. Typically in this survey, both 'host' Mn and Fe are present consistently at several hundred ppm in the 0.1 M NH₂OH · HCl/0.1 M HNO₃ and 0.25 M NH₂OH · HCl/0.1 M HCl leaches, respectively. Little Fe is dissolved in the 0.1 M NH₂OH · HCl/0.01 M HNO₃ leach and usually is present at 1–2 orders of magnitude below Mn.

4. Readsorption

The accuracy of a selective leach is affected not only by the degree to which unwanted phases are concurrently dissolved with the phase of interest, but also by the extent to which the analyte is redis-

tributed between solution and solid during the leach. Analyte loss during extraction could be the result of adsorption, (co)precipitation and complexation, but is often simply referred to as 'readsorption'. Too few publications exist on this topic and those that do are controversial, probably due to the widely differing experimental conditions used (Rendell et al., 1980; Belzile et al., 1989). Recent work by Qiang et al. (1994), in an effort to negate criticism of the use of artificial phases, employed model soils to study the readsorption of Cu and Pb during extraction by 1 M NaOAc/HOAc of the 'adsorbed/exchangeable/carbonate' phase. Pyrolusite and humic acid, constituents of the model soils, showed much stronger affinities for Cu and Pb redistribution than hematite, illite and montmorillonite. The relative importance of the constituent phases depended upon both the binding ability and the abundance of components. The leach itself may well create fresh binding sites on a soil or sediment sample as a particular phase is dissolved.

Tests for readsorption of analytes by the various selective leaches used at the GSC have identified Au

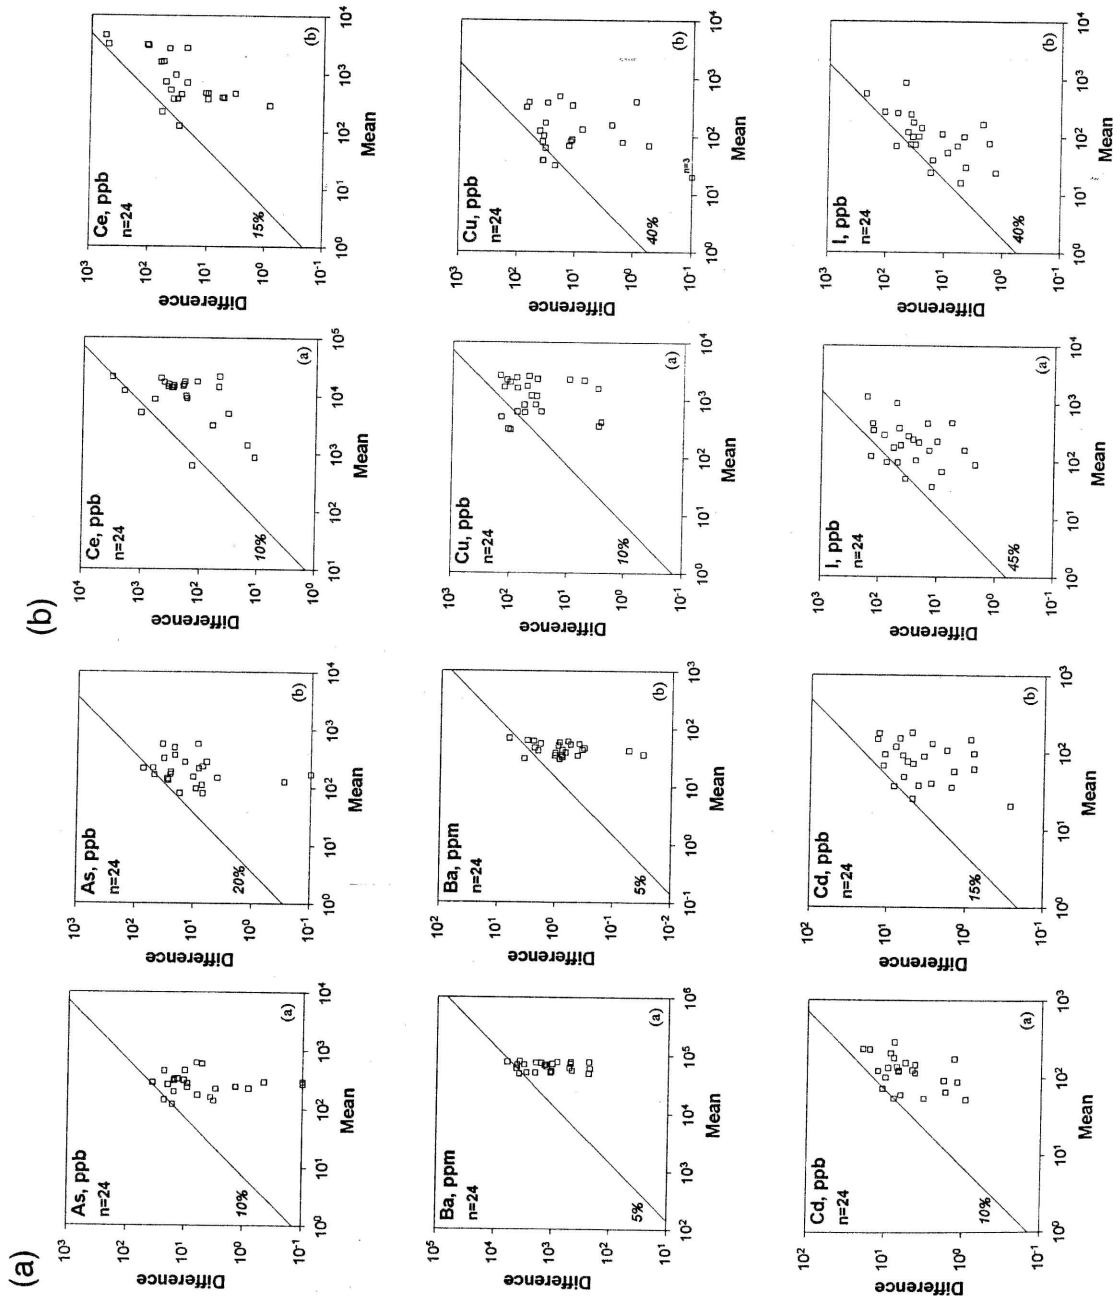

FI
N
(
ph
du
H

as
S
ca
H
bo
or
d

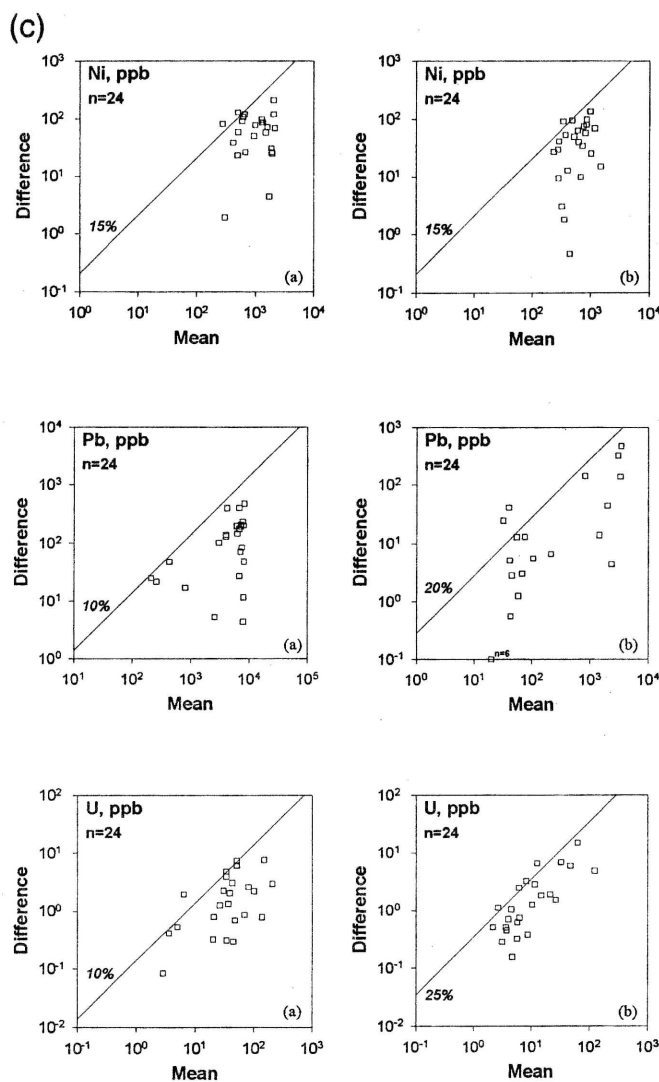


Fig. 3. (a) Thompson and Howarth (1978) plots for As, Ba and Cd in analytical duplicate soil samples collected in Nevada, by $\text{NH}_2\text{OH} \cdot \text{HCl}$ leaches for (a) amorphous Fe oxide phase and (b) Mn oxide phase. (data from Hall et al., 1997b). (b) Thompson and Howarth (1978) plots for Ce, Cu and I in analytical duplicate soil samples collected in Nevada, by $\text{NH}_2\text{OH} \cdot \text{HCl}$ leaches for (a) amorphous Fe oxide phase and (b) Mn oxide phase (data from Hall et al., 1997b). (c) Thompson and Howarth (1978) plots for Ni, Pb and U in analytical duplicate soil samples collected in Nevada, by $\text{NH}_2\text{OH} \cdot \text{HCl}$ leaches for (a) amorphous Fe oxide phase and (b) Mn oxide phase (data from Hall et al., 1997b).

as being the element of concern (Hall et al., 1995). Studies of soils and sediments indicated that significant reabsorption was occurring in both $\text{NH}_2\text{OH} \cdot \text{HCl}$ and $\text{Na}_4\text{P}_2\text{O}_7$ leaches. Recovery of organically bound Au, by application of the latter leach to an organic-rich lake sediment, was found to be dependent on sample weight/leach volume ratio, ranging

from 59 (3 g sample) to 128 ppb Au (0.5 g sample). Recoveries of 30% or less were obtained for Au spikes added to soil and sediment samples undergoing both leaches. Analysis of the residues confirmed that the 'lost' Au was indeed on the sample; that is, 'lost' Au was not in a colloidal form in solution which required digestion prior to analysis. The MO-

MEO procedure used in China to quantify various labile forms of elements involves a second treatment for Au specifically, to release Au from a colloidal form present in the leach solution after extraction (see Wang, 1998). This is *not* the problem of re-adsorption discussed by Hall et al. (1995).

The degree of re-adsorption of Au taking place in an iodide extraction of various soil matrices has been studied by Gray et al. (1998). A sachet of activated carbon served to preferentially sorb the Au released from these soils and was therefore subsequently analysed. However, the dependency of results on leaching time seriously limits the practicality of this partial extraction. Other work has suggested that re-adsorption may be occurring in slightly acidic leaches for elements such as Sb and Mo which form oxyanions and are more stable under alkaline conditions (Hall et al., 1997b). The degree of re-adsorption occurring depends upon the element itself, the chemical characteristics of the extractant, the sample constituents and the conditions of extraction. More research is needed in this area to elucidate the mechanisms of redistribution and to ascertain its effect on geochemical patterns obtained in selective leach surveys.

5. Concluding remarks

The application and development of selective leaches in exploration geochemistry is in a growth period. The degree of accuracy achieved in their application affects the interpretation of survey data and elucidation of mechanisms of element migration. More studies are needed to assess this accuracy, especially for the Enzyme and MMI leaches where publications are few. Evaluation of precision should be more extensive, particularly to gain insight into the relative contributions of field sampling reproducibility and analytical method variation. Research at the GSC has shown that analytical precision is excellent for the hydroxylamine hydrochloride and pyrophosphate leaches, with RSDs generally below 10%. Some low-abundance elements such as Sb, Bi, Se and Te require additional sensitivity of measurement by introducing them as their gaseous hydrides rather than direct ICP-MS analysis. The optimum method of sample preservation for the various modes

of occurrence also needs to be better defined. With these basic requirements recognised, the question *which phase (or binding mechanism) should be analysed, in which sample type, at what size fraction, and under what field conditions* will be easier to answer.

References

- Alloway, B.J., 1990. Heavy Metals in Soils. Blackie, Glasgow, 339 pp.
- Anderson, B.J., Jenne, E.A., Chao, T.T., 1973. The sorption of silver by poorly crystallised manganese oxides. *Geochim. Cosmochim. Acta* 37, 611–622.
- Antropova, L.V., Goldberg, I.S., Voroshilov, N.A., Ryss, Ju.S., 1992. New methods of regional exploration for blind mineralization: application in the USSR. *J. Geochem. Explor.* 43, 157–166.
- Bascomb, C.L., Thanigasalam, K., 1978. Comparison of aqueous acetylacetone and potassium pyrophosphate solution for selective extraction of organic-bound Fe from soils. *J. Soil Sci.* 29, 382–387.
- Belzile, N., Lecomte, P., Tessier, A., 1989. Testing re-adsorption of trace elements during partial chemical extractions of bottom sediments. *Environ. Sci. Technol.* 23, 1015–1020.
- Borggaard, O.K., 1982. Selective extraction of amorphous iron oxides by EDTA from selected silicates and mixtures of amorphous and crystalline iron oxides. *Clay Miner.* 17, 365–368.
- Bradshaw, P.M.D., Thomson, I., Smee, B.W., Larsson, J.O., 1974. The application of different analytical extractions and soil profile sampling in exploration geochemistry. *J. Geochem. Explor.* 3, 209–225.
- Butt, C.R.M., Zeegers, H., 1992. *Regolith Exploration Geochemistry in Tropical Terrains and Subtropical Terrains*. Elsevier, Amsterdam, 607 pp.
- Chao, T.T., 1972. Selective dissolution of manganese oxides from soils and sediments with acidified hydroxylamine hydrochloride. *Soil Sci. Soc. Am., Proc.* 36, 764–768.
- Chao, T.T., 1984. Use of partial dissolution techniques in geochemical exploration. *J. Geochem. Explor.* 20, 101–135.
- Chao, T.T., Theobald, P.K., 1976. The significance of iron and manganese oxides in geochemical exploration. *Econ. Geol.* 71, 1560–1569.
- Chao, T.T., Zhou, L., 1983. Extraction techniques for selective dissolution of amorphous iron oxides from soils and sediments. *Soil Sci. Soc. Am., Proc.* 47, 225–232.
- Clark, J.R., 1993. Enzyme-induced leaching of B-horizon soils for mineral exploration in areas of glacial overburden. *Trans. Inst. Min. Metall.* 102, B19–B29.
- Gatehouse, S., Russell, D.W., Van Moort, J.C., 1977. Sequential soil analysis in exploration geochemistry. *J. Geochem. Explor.* 8, 483–494.
- Goldberg, I.S., 1998. Vertical migration of elements from mineral deposits. *J. Geochem. Explor.* 61, 191–202, (this volume).

defined. With the question should be analysed size fraction, will be easier to

Blackie, Glasgow,

The sorption of oxides. *Geochim.*

N.A., Ryss, Ju.S., for blind mineral-chem. *Explor.* 43,

comparison of aqueous solution for selections. *J. Soil Sci.* 29,

sting readsorption reactions of bottom -1020.

of amorphous iron and mixtures of *Miner.* 17, 365–

., Larsson, J.O., and extractions and *stry. J. Geochem.*

oration *Geochem-Terrains.* Elsevier,

anese oxides from amine hydrochloro-

techniques in geo-0, 101–135.

ance of iron and *a. Econ. Geol.* 71,

ques for selective a soils and sedi-2.

horizon soils for eden. *Trans. Inst.*

1977. *Sequential geochem. Explor.*

ents from mineral (this volume).

- Gray, D.J., Lintern, M.J., Longman, G.D., 1998. Readsorption of gold during selective extraction — observations and potential solutions. *J. Geochem. Explor.* 61, 21–37, (this volume).
- Hale, M., Plant, J.A., 1994. *Drainage Geochemistry in Mineral Exploration.* Elsevier, Amsterdam, 766 pp.
- Hall, G.E.M., 1996. Twenty-five years in geoanalysis, 1970–1995. *J. Geochem. Explor.* 57, 1–8.
- Hall, G.E.M., Pelchat, P., 1997a. Comparison of two reagents, sodium pyrophosphate and sodium hydroxide, in the extraction of labile metal organic complexes. *Water Air Soil Pollut.*, in press.
- Hall, G.E.M., Pelchat, P., 1997b. Comparability of results obtained by the use of different selective extraction schemes. *Water Air Soil Pollut.*, in press.
- Hall, G.E.M., MacLaurin, A.I., Vaive, J.E., 1995. Readsorption of gold during the selective extraction of the 'soluble organic' phase of humus, soil and sediment samples. *J. Geochem. Explor.* 54, 27–38.
- Hall, G.E.M., Vaive, J.E., Beer, R., Hoashi, M., 1996a. Selective leaches revisited, with emphasis on the amorphous Fe oxyhydroxide phase extraction. *J. Geochem. Explor.* 56, 59–78.
- Hall, G.E.M., Vaive, J.E., MacLaurin, A.I., 1996b. Analytical aspects of the application of sodium pyrophosphate reagent in the specific extraction of the labile organic component of humus and soils. *J. Geochem. Explor.* 56, 23–36.
- Hall, G.E.M., MacLaurin, A.I., Pelchat, J.C., Gauthier, G., 1997a. Comparison of the techniques of atomic absorption spectrometry and inductively coupled plasma mass spectrometry in the determination of Bi, Se and Te by hydride generation. *Chem. Geol.* 137, 79–89.
- Hall, G.E.M., Vaive, J.E., Button, P., 1997b. Detection of past underground nuclear events by geochemical signatures in soils. *J. Geochem. Explor.* 59, 145–162.
- Jeanroy, E., Guillet, B., 1981. The occurrence of suspended ferruginous particles in pyrophosphate extracts of some soil horizons. *Geoderma* 26, 95–105.
- Kabata-Pendias, A., Pendias, H., 1984. *Trace Elements in Soils and Plants.* CRC Press, Boca Raton, FL, 315 pp.
- Kauranne, L.K., Salminen, R., Eriksson, K., 1992. *Regolith Exploration Geochemistry in Arctic and Temperate Terrains.* Elsevier, Amsterdam, 443 pp.
- Kersten, M., Forstner, U., 1989. Speciation of trace elements in sediments. In: Batley, G. (Ed.), *Trace Element Speciation: Analytical Methods and Problems.* CRC Press, Boca Raton, FL, pp. 245–317.
- Levinson, A.A., 1974. *Introduction to Exploration Geochemistry.* Applied Publishing, Calgary, 612 pp.
- Loganathan, P., Bureau, R.G., 1973. Sorption of metal ions by a hydrous manganese oxide. *Geochim. Cosmochim. Acta* 37, 1277–1293.
- Mann, A.W., Birrell, R.D., Mann, A.T., Humphreys, D.B., Perdrix, J.L., 1998. Application of the mobile metal ion technique to routine geochemical exploration. *J. Geochem. Explor.* 61, 87–102, (this volume).
- McKeague, J.A., Brydon, J.E., Miles, N.M., 1971. Differentiation of forms of extractable iron and aluminium in soils. *Soil Sci. Soc. Am., Proc.* 35, 33–38.
- McLaren, R.G., Crawford, D.V., 1973. Studies on soil copper II. The specific adsorption of copper by soils. *J. Soil Sci.* 24, 172–181.
- Overstreet, W.C., Lowering, T.G., Rosenblum, K., Hubert, A.E., Crenshaw, G.L., 1978. Minor elements in magnetic concentrates from Alaska. *U.S. Geol. Surv. Rep. USGS-GD-78-004*, 596 pp.
- Pickering, W.F., 1986. Metal ion speciation — soils and sediments (a review). *Ore Geol. Rev.* 1, 83–146.
- Qiang, T., Xiao-Quan, S., Jin, Q., Zhe-Ming, N., 1994. Trace element redistribution during extraction of model soils by acetic acid/sodium acetate. *Anal. Chem.* 66, 3562–3568.
- Rendell, P.S., Batley, G.E., Cameron, A.J., 1980. Adsorption as a control of metal concentrations in sediment extracts. *Environ. Sci. Technol.* 14, 314–318.
- Robbins, J.M., Lyle, M., Heath, G.R., 1984. A sequential extraction procedure for partitioning elements among coexisting phases in marine sediments. *College of Oceanography, Rep.* 84-3, Oregon State Univ., Corvallis.
- Rose, A.W., Hawkes, H.E., Webb, J.S., 1979. *Geochemistry in Mineral Exploration.* Academic Press, New York, 655 pp.
- Ryss, J.S., Cherfas, M.A., Goldberg, I.C., Voroshilov, N.A., Siegel, H.O., Kinrade, J., Chance, P., 1990. Final report on the 1990 geochemical test program conducted by NPO Rudgeofizika and Scintrex Limited. Unpublished, 41 pp.
- Schnitzer, M., Khan, S.U., 1972. *Humic Substances in the Environment.* Marcel Dekker, New York, 327 pp.
- Schnitzer, M., Schuppli, P., 1989. Method for the sequential extraction of organic matter from soils and soil fractions. *Soil Sci. Soc. Am. J.* 53, 1418–1424.
- Sondag, F., 1981. Selective extraction procedures applied to geochemical prospecting in an area of old mine workings. *J. Geochem. Explor.* 15, 645–652.
- Span, D., Gaillard, J.F., 1986. An investigation of a procedure for determining carbonate-bound trace metals. *Chem. Geol.* 56, 135–141.
- Taylor, R.M., 1990. Some observations on the formation and transformation of iron oxides. In: De Boedt, M.F. (Ed.), *Soil Colloids and Their Associations in Aggregates.* Plenum Press, New York, pp. 85–103.
- Tessier, A., Campbell, P.G.C., Bisson, M., 1979. Sequential extraction procedure for the speciation of particulate trace metals. *Anal. Chem.* 51, 844–850.
- Thompson, M., Howarth, R.J., 1978. A new approach to the estimation of analytical precision. *J. Geochem. Explor.* 9, 23–30.
- Wang, X., 1998. Leaching of mobile forms of metals in overburden: development and application. *J. Geochem. Explor.* 61, 39–55, (this volume).
- Zeissink, H.E., 1971. Trace element behaviour in two nickeliferous laterite profile. *Chem. Geol.* 7, 25–36.



PII: S0883-2927(96)00040-6

Pb isotopic ratios and elemental abundances for selective leachates from near-surface till: implications for mineral exploration

A. Simonetti* and K. Bell

Ottawa-Carleton Geoscience Centre, Carleton University, 1125 Colonel By Drive, Ottawa,
Ontario K1S 5B6, Canada

and

G. E. M. Hall

Geological Survey of Canada, 601 Booth St., Ottawa, Ontario K1A 0E8, Canada

(Received 11 August 1995; accepted in revised form 2 April 1996)

Abstract—Pb isotope ratios obtained from fine-grained fractions (<63 and $<2\ \mu\text{m}$) from near-surface (<1 m depth) till surrounding ore deposits show isotopic overprinting from the underlying sulfide mineralization, and provide a new approach to mineral exploration for massive sulfide deposits (VMS) in glaciated terrains.

In this study, Pb isotopic measurements, and selective leaching of 6 near-surface till samples down-ice from the Chisel Lake (Manitoba) and Manitouwadge (Ontario) VMS deposits were carried out in order to determine the location and nature of the Pb within till. Elemental abundances from selective leachates for all 6 samples display similar patterns and show that chalcophile elements (Cu, Ni, Pb and Zn), derived predominantly from the underlying VMS deposits, occur as (i) adsorbed/exchangeable metals; (ii) associated with oxyhydrous Fe and Mn; (iii) crystalline Fe oxides, and/or (iv) silicate. Despite the relative proximity of some of the till samples to the VMS deposits, only a very small component of the chalcophile elements is present as sulfide. This result is consistent with those from studies of weathered (oxidized) tills, which show that labile minerals such as sulfides have been completely destroyed and their chemical constituents reprecipitated or scavenged locally by clay-sized phyllosilicates and secondary oxides/hydroxides.

Pb isotopic ratios for selective leachates from till samples with VMS-like (anomalous) signatures are similar to those from ore (galena) within the proximal VMS deposits. This indicates that the Pb is of a secondary nature and was probably scavenged and deposited after destruction of original sulfide minerals during till formation. The lack of a predominant sulfide-held Pb component within the selective leachates supports this interpretation. In contrast, Pb isotopic ratios for the same selective leachates from "background" samples are significantly higher and show that the Pb is not derived from proximal VMS deposits but from a more radiogenic source.

Till samples were also leached using 2.5 M HCl ("conventional" leaching). The Pb isotope ratios from the conventional leachates are similar to those obtained from the selective leachates, and show a large difference in Pb isotopic ratios between anomalous and background samples. We propose, therefore, that the conventional leaching rather than selective leaching or complete dissolution of a particular grain-size fraction be adopted for mineral exploration purposes using glacial sediments.

The results from this study support the effective use of Pb isotope ratios from near-surface till as an exploration tool despite the weathered nature of the latter. We feel that this represents a more cost-effective technique over traditional geochemical prospecting methods, if used in conjunction with Pb abundance data. Copyright © 1996 Elsevier Science Ltd

INTRODUCTION

Mineral exploration for ore deposits in glaciated terrains is complicated by glacial dispersal of mineralized bedrock and burial of ore beneath glacial sediment. Pb isotopic analysis of overburden, such as gossans, soils, stream sediments, and weathered bedrock, however, has been used as an effective exploration tool for concealed mineralization (e.g. Gulson,

1986 and references within; Gulson *et al.*, 1992). The application of Pb isotopes in mineral exploration for base and precious metal deposits using surficial sediments has been successful because: 1) Pb isotope ratios are not altered in the transition from the ore body to the secondary weathering environment (Gulson, 1986); 2) the isotope signature of some VMS deposits can be quite different to those of the country rock; and 3) Pb isotopic ratios are quantitatively and objectively measured.

Recently, Pb isotope ratios from glacial sediments overlying several known volcanogenic massive sulfide deposits (VMS) in Canada, such as Chisel Lake

* Corresponding Author: Present Address: Max-Planck-Institut für Chemie, Abteilung Geochemie Postfach 3060, 55020 Mainz, Germany.

(Manitoba: Bell and Franklin, 1993), Buchans (Newfoundland: Bell and Murton, 1995), and Manitowadge (Ontario: Bell and Card, in prep.) clearly indicate an overprint from the adjacent ore deposits and may provide a new method for detecting buried ore bodies. Pb isotopic ratios from the <63 and <2 μm fractions of till from Buchans (Bell and Murton, 1995), and Chisel Lake (Bell and Franklin, 1993) show a large variation; in general, till samples with overprinted Pb isotopic ratios usually contain higher abundances of Pb, and are close to the ore deposit (<1 km). On the basis of their Pb abundances, Pb isotopic ratios, and down-ice location with respect to ore deposits (Figs 1 and 2), 6 till samples (<63 μm fraction), 4 from Chisel Lake (Manitoba) and 2 from Manitowadge (Ontario), have been selected for this study. The samples from both deposits include those with lower, "ore-like" Pb isotopic ratios ($^{206}\text{Pb}/^{204}\text{Pb} < 18.00$), here referred to as "anomalous" samples, whereas those with higher, more radiogenic (crust-like) isotopic ratios are referred to as "background" samples. Although studies have shown the important use of Pb isotopes in glacial geology (Bell and Murton, 1995) and mineral exploration

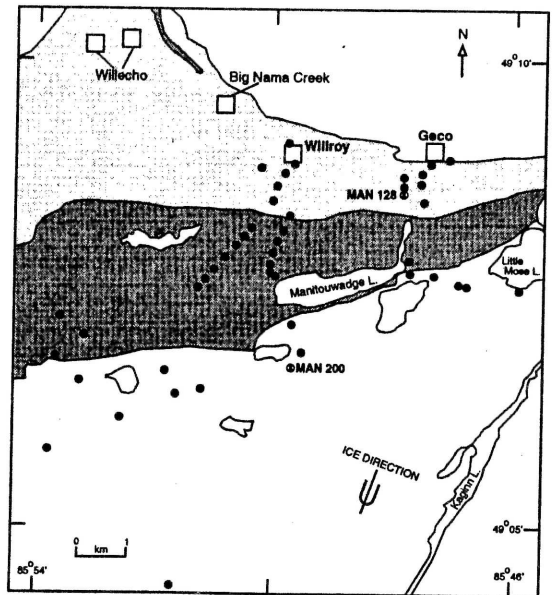


Fig. 2. Simplified geological map of the Manitowadge area showing till sample locations (solid dots, Bell and Card, in prep.). Samples used in this study are indicated as labelled circles. Lighter shading ("Grey Gneiss Group")—is composed of both metasedimentary and minor felsic volcanic rocks; Darker shading ("Hornblende Schist Group") consists of highly deformed mafic, pillowed metavolcanic rocks (Williams *et al.*, 1990); Squares—massive sulfide deposits.

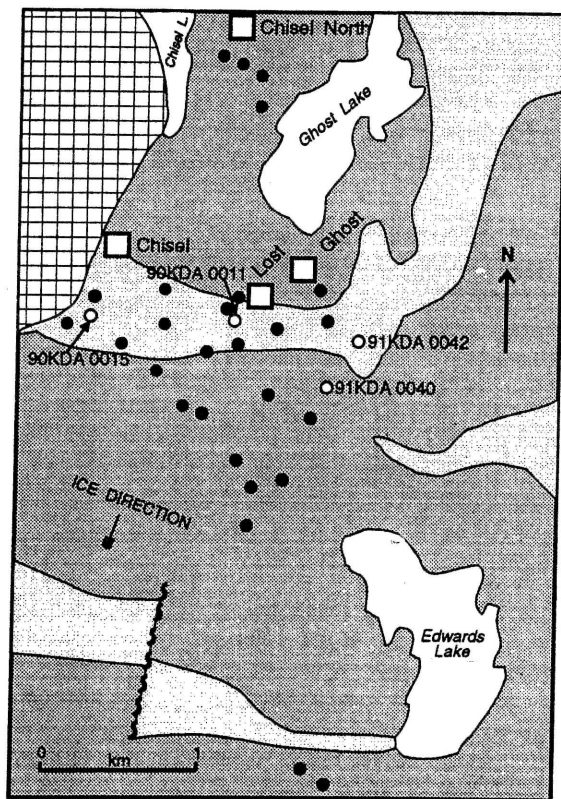


Fig. 1. Simplified geological map of the Chisel Lake area showing location of till samples (solid dots). Samples used in this study are indicated by labelled circles. Grid pattern—Chisel Lake gabbro; light shading—felsic flows, wackes, and breccias; dark shading—mafic flows, wackes, and breccias; Squares—massive sulfide deposits (modified after Bell and Franklin, 1993).

(Bell and Franklin, 1993), the exact location and nature of the Pb being held within glacial sediments is still unknown. Identification of the main binding sites for trace metals is important, providing both insight concerning the geochemical processes during and after till formation, and discrimination between trace-metal sources.

Ore and pathfinder elements are transported by various mechanisms from the source to the surficial environment, where they are held in relatively labile forms associated with different reaction sites (Hall *et al.*, 1993, in press). Organic matter and hydrous coatings of Fe and Mn are the most important surface-active phases ("scavengers"), which are widely distributed in subaerial and subaqueous environments, and have long provided an exploration tool (e.g. Hawkes and Webb, 1962; Levinson, 1980). Formation of Fe and Mn oxides and their metal capture is dependent on the Eh and pH of aqueous solutions, and the activities of many heavy metals are at a minimum in equilibrium with their hydroxides (Jenne, 1962). Selective extraction methods, therefore, have been used in exploration geochemistry to examine only those metals adsorbed on, or included in, specific mineral phases. A summary of the theory, analytical procedures and applications of selective leaches can be found in Chao (1984). Recently, a sequential leaching technique has been developed by the Analytical Method Development section of the Geological Survey of Canada (Hall *et al.*, 1993, in

press). The technique was designed to mimic the action of 2 Soviet selective leaching methods — "MPF" and "TMGM" (e.g. Antropova *et al.*, 1992). The "MPF" method is based on the extraction of metal-organic complexes, whereas the "TMGM" technique is intended to extract elements adsorbed by amorphous forms of Fe and Mn oxyhydroxides (Hall *et al.*, 1993, in press).

Selective leaching was conducted on the <63 µm size fraction from 6 till samples because this grain size fraction is widely used in mineral exploration, and it is much cheaper to extract than other finer-grained size fractions (e.g. <2 µm). The aims of this study are to determine the concentration of Pb and other trace metals in selective leachates and measure the Pb isotopic ratio of each Pb-bearing leachate in an attempt to assess its source — i.e. crustal or VMS-derived. The applied objective is to identify the leaching method (selective vs conventional) which best serves for VMS exploration in glaciated terrains, using Pb isotopes.

GEOLOGY

Two locations were chosen for this study, one in Manitoba and the other in Ontario. Both are associated with Precambrian VMS deposits associated with greenstone belts. Sampling of both areas was carried out during an evaluation programme of the use of Pb isotopes for mineral exploration in glacial sediments.

Chisel Lake

Sampling of the Quaternary cover that overlies the Zn-Cu sulfide deposits at Chisel Lake, near Snow Lake, northern Manitoba (Fig. 1) was completed in 1991 by the Geological Survey of Canada, and material was supplied for Pb isotope analyses. Four sulfide deposits, the Chisel Lake, Chisel Lake North, Lost and Ghost deposits, are present in the bimodal volcanic suite of the early Proterozoic-age Amisk Group (Fig. 1 of Bailes and Galley, 1989; Galley *et al.*, 1990). The deposits and country rocks have been dated at 1889 Ma (U/Pb data; Bailes, 1992). The ore bodies are composed of at least 7.4 million tonnes (t) with an average grade of 10.9% Zn, 1.4% Pb and 0.5% Cu. They contain pyrite, sphalerite, chalcopyrite and galena, as well as trace amounts of arsenopyrite, tetrahedrite and native gold. The deposits are immediately above and adjacent to rhyolite domes and below dacitic ash and breccia. Extensive metamorphosed alteration pipes consisting of muscovite, staurolite, chlorite, gedrite, garnet and pyrite underlie the deposits. Lateral to and slightly below the deposits are zones of garnet-chlorite-muscovite-staurolite and for several hundred meters below the ore horizon the rocks are silicified and albitized. Lower in the

succession thick mafic flows are intercalated with felsic ash and flow sequences. The country rocks are part of the juvenile core of the Trans-Hudson orogen, an arc-related sequence that formed between 1950 and 1835 Ma ago and which was tectonized during the Hudsonian collisional event. All of the rocks are metamorphosed to middle amphibolite grade. Till samples were collected (Fig. 1) from sites <4 km down-ice of the deposits. On the basis of pebble content (C. Kaszycki, 1993, personal commun.), the till (<3 m thick) is considered to be of local provenance and forms a single unit of material derived from Proterozoic rocks of the Snow Lake area. The ice direction is roughly 190 to 210°. The 4 samples from Chisel Lake (90KDA 0011, 0015; 91KDA 0040, 0042) are from the C-horizon, which varies in depth from 0.30 to 0.80 meters.

Manitouwadge

Till samples were collected during a 1992 field excursion, primarily to the south and immediately down-ice from the Willroy and Geco VMS deposits (Fig. 2). Both deposits are hosted by the highly deformed (refolded synform), Archean Manitouwadge greenstone belt, which consists of a wide variety of rock types including metavolcanic, metasedimentary and metamorphosed Fe formation, and lies within the Wawa subprovince of the Archean Superior Province (Peterson and Zaleski, 1994; Zaleski and Peterson, 1993; Williams and Breaks, 1990; Zaleski *et al.*, 1994). The Geco Cu mine and several other previously-worked deposits lie south of the main belt of synvolcanic alteration and in most areas are associated with Fe formations. Intrusive rocks within the greenstone belt include foliated diorites to granites, gabbro, K-feldspar-megacrystic granodiorite and strongly foliated to massive pegmatites (Zaleski and Peterson, 1993; Zaleski *et al.*, 1994). Host rocks surrounding the Manitouwadge greenstone belt consist of granites and granite gneisses. The greenstone belt is host to 4 known VMS deposits, the largest of which is the Geco Cu-Zn-Ag deposit (Friesen *et al.*, 1982) and contains an ore grading of 1.9% Cu, 3.8% Zn, 1.7 ounces of Ag/ton, and minor amounts of Au, Cd, Bi and Pb (0.30%) (Williams *et al.*, 1990). Mineralization consists of deformed massive sulfides, predominantly pyrite-pyrrhotite-sphalerite-chalcopyrite which is spatially associated with banded ironstone horizons (Williams *et al.*, 1990; Williams and Breaks, 1989).

Glacial sediments in the Manitouwadge area are thought to have been deposited during the Late Wisconsinian, with striae measurements indicating that the predominant ice flow direction was toward 210–220° (Kristjansson and Geddes, 1985; Geddes and Bajc, 1985; Barnett *et al.*, 1991; Kettles, 1993a, 1993b). The till commonly forms a thin, discontinuous veneer (up to 1.5 m thick), but can exceed 10 m

thickness in some places (Kristjansson and Geddes, 1985; Geddes and Bajc, 1985). Geochemical analysis of 286 till samples (Kettles and Murton, 1994) indicates the presence of local Precambrian lithologies and/or a large component of Paleozoic carbonate debris, transported more than 100 km from the Hudson and James Bay lowlands. In addition, high concentrations of Cu, Pb and Zn occur within the <63 and <2 μm fractions of till located near the main Manitouwadge VMS deposits (Kettles and Murton, 1994). MAN 128 is from the B/C horizon located at a depth of ~0.4 to 0.5 meters which contains some rusty brown mottles (Fe oxides) indicative of weathering. MAN 200 is a sample of olive-grey, C-horizon till taken at a depth of 0.60 to 0.65 meters.

ANALYTICAL METHODS

Approximately 1 g of till from the <63 μm fraction was sequentially leached according to the method briefly outlined in Table 1 (see Hall *et al.*, 1993, in press for details). Leachate solutions were subsequently evaporated to dryness and conditioned with 3 to 4 ml of 1N HBr acid. Lead was separated in HBr and HCl using a two-column (0.5 and 0.2 ml) extraction procedure (see Simonetti *et al.*, 1995 for details). Samples for Pb isotopic analyses were run on a single Re filament with silica gel and phosphoric acid using a Finnigan-MAT 261 solid-source mass spectrometer in the static mode. Blank levels for Pb in selective extraction reagents (Table 1) range from 0.001 to 0.004 ppm, whereas the total procedural Pb blank varies from 0.2 to 1.5 ng.

RESULTS

Distribution of Pb and other chalcophile elements

Elemental concentrations, obtained using atomic absorption spectrometry (AAS) at the Geological Survey of Canada, for all selective leachates are shown in Table 2, and abundances for various base metals (Cu, Ni, Pb and Zn), are plotted against their respective leachates (A to H) in Figs 3 and 4. Table 2 and Figs 3 and 4 show that the Pb contained within the 6 till samples occurs predominantly in 4 different forms: (1) water-soluble and exchangeable metal (adsorbed); (2) hydrous oxide of Fe or Mn (FeOH-

MnOH); (3) crystalline FeO; (4) silicate and/or residual oxide. An extremely important finding is that *negligible* Pb is held in the sulfide form (leachates G, Table 2). Figure 3 shows that the till sample with the highest Pb concentration (88 ppm), 90KDA 0011 from Chisel Lake, has more than 50% of the Pb held as either an adsorbed metal (leachates A, B) or as an FeOH-MnOH (leachates C, D). In addition, "anomalous" samples 90KDA 0011 and 0015 from Chisel Lake and MAN 128 from Manitouwadge display a similar Pb distribution pattern to those for some "background" samples from the same deposit (Figs 3 and 4), although the latter plot at lower concentrations.

The distribution of the chalcophile elements Cu, Ni and Zn, typically abundant within VMS deposits, for the selective leachates are also shown in Figs 3 and 4. The distribution of these elements is similar to that of Pb, since they occur predominantly as either adsorbed metals, hydrous oxides of Fe and Mn, crystalline FeO, or silicates. A small proportion of the Cu, Ni and Zn occur as sulfides (Figs 3 and 4), which may suggest that sulfide minerals, such as chalcopyrite, and pyrrhotite, are present in trace amounts. A duplicate analysis of Chisel Lake sample 90KDA 0011 (Table 2) shows a mean reproducibility of approximately 2% for the quoted concentrations. In addition, shown in Table 3 are the mean and standard deviation values for various elements in control samples TILL-2 and LKSD-4 (from Hall *et al.*, in press). Abundances for control sample TILL-2, obtained during the course of this study, fall within the accepted standard deviations (Table 3).

Pb isotopic overprinting of some of the till samples (90KDA 0011, 90KDA 0015 and MAN 128) by the underlying ore deposit has been shown by Bell and Franklin (1993) and this occurs despite the lack of Pb in the sulfide form (Table 2). This indicates that a large component of the Pb which occurs as either an adsorbed metal (leachates A, B), hydrous oxide of Fe or Mn (leachates C, D), or crystalline FeO (leachates E, F) must have been derived from the ore deposit. It is highly probable that the dominant Pb-sulfide mineral associated with VMS deposits, galena (PbS), was

Table 1. Sequential extraction scheme (Hall *et al.*, 1993)

Extractant	Phases dissolved	Leachate symbol used
1 M NaOAc.HOAc 1 g sample/20 ml 2 \times 6 hr constant shaking	Adsorbed metals, exchangeable, carbonates and some phosphates	A, B
0.25 M NH ₂ OH.HCl in 0.25 M HCl 20 ml reagent, at 60°C; first leach for 2 hr, second for 0.5 hr	Amorphous oxyhydrides of Fe and Mn	C, D
1 M NH ₂ OH.HCl in 25% HOAc 30 ml reagent, at 90°C; first leach for 3 hr, second leach for 1.5 hr	Crystalline Fe oxides (e.g., hematite, goethite, magnetite, maghemite, lepidocrocite)	E, F
KClO ₃ /HCl, 15 ml, for 0.5 hr with mixing; followed by 4M HNO ₃ (10 ml) at 90°C	Sulphides and "less soluble" organic matter	G
HF-HClO ₄ -HNO ₃ -HCl, 10 ml, to dryness	Silicates, residual crystalline fraction (refractory minerals could remain in a final residue)	H

Table 2. Elemental concentrations of selective extraction leachates from <63 µm fraction of till samples

	Leachates								Total
	A	B	C	D	E	F	G	H	
Pb (ppm):									
90KDA 0011	37	5	24	1	6	-	-	15	88 (79)
90KDA 0011 Dup.	37	5	23	1	8	1	-	14	89
90KDA 0015	2	1	11	1	-	1	-	12	28 (26)
91KDA 0040	-	-	1	-	-	-	-	11	12 (11)
91KDA 0042	-	-	-	-	-	-	-	10	10 (12)
MAN 128	4	1	7	1	4	-	1	10	28 (29)
MAN 200	1	1	4	-	1	-	-	8	15 (11)
Blank*	-	-	0.5	-	1	-	-	-	1.5
Cu (ppm):									
90KDA 0011	8	2	84	11	47	5	14	31	202
90KDA 0011 Dup.	9	2	83	10	48	5	14	31	202
90KDA 0015	2	-	22	2	14	-	5	4	49
91KDA 0040	1	-	11	2	8	-	4	3	29
91KDA 0042	2	-	29	7	17	1	4	5	65
MAN 128	1	1	11	4	15	1	4	4	41
MAN 200	-	-	4	1	8	-	4	2	19
Blank*	-	-	-	-	-	-	1	-	1
Zn (ppm):									
90KDA 0011	2	1	189	37	130	10	30	64	463
90KDA 0011 Dup.	2	-	186	36	135	10	29	64	462
90KDA 0015	2	-	114	10	56	6	19	30	237
91KDA 0040	-	-	17	3	16	3	9	19	67
91KDA 0042	-	-	16	2	8	1	8	23	58
MAN 128	4	1	87	32	135	9	15	35	318
MAN 200	-	-	9	3	14	2	9	16	53
Blank*	-	-	-	-	-	-	4	-	4
Ni (ppm):									
90KDA 0011	-	-	8	1	8	-	4	9	30
90KDA 0011 Dup.	-	-	8	-	8	1	7	9	33
90KDA 0015	-	-	10	1	10	1	5	13	40
91KDA 0040	-	-	7	1	8	1	5	10	32
91KDA 0042	-	-	9	1	6	-	3	10	29
MAN 128	-	-	2	-	8	1	3	8	22
MAN 200	1	-	5	2	14	1	5	12	40
Blank*	1	-	-	-	-	-	1	1	3
Mn (ppm):									
90KDA 0011	2	-	35	4	29	5	11	191	277
90KDA 0011 Dup.	2	-	35	4	29	5	11	188	274
90KDA 0015	6	1	80	4	29	5	14	187	326
91KDA 0040	8	6	89	5	34	6	17	211	376
91KDA 0042	1	-	30	4	19	4	9	316	383
MAN 128	-	-	8	3	28	5	9	138	191
MAN 200	17	13	88	12	55	9	20	158	372
Blank*	-	-	-	-	-	-	-	-	-
Fe (ppm):									
90KDA 0011	48	28	5858	828	6925	1070	2975	16560	34292
90KDA 0011 Dup.	47	26	5865	780	6950	1140	2938	16940	34686
90KDA 0015	53	27	8400	1062	8300	985	2925	14160	35912
91KDA 0040	40	32	5588	885	7400	1070	3013	14460	32488
91KDA 0042	98	38	7005	1314	6750	805	2175	19800	37985
MAN 128	247	135	2258	477	4788	660	1475	7800	17840
MAN 200	106	63	5610	1143	7700	885	2413	10540	28460
Blank*	-	-	-	1	2.5	-	-	2.5	6
Co (ppm):									
90KDA 0011	-	-	3	-	1	-	-	4	8
90KDA 0011 Dup.	-	-	2	-	1	-	-	4	7
90KDA 0015	-	-	4	-	1	-	-	4	9
91KDA 0040	-	-	3	-	3	-	-	4	10
91KDA 0042	-	-	4	-	-	-	-	6	10
MAN 128	-	-	1	-	1	-	-	3	5
MAN 200	-	-	2	-	3	-	1	4	10
Blank*	-	-	-	-	-	-	0.5	-	0.5

Leachates: A—1st leachate for adsorbed/exchangeable metal; B—2nd leachate for adsorbed and exchangeable metal; C—1st leachate for hydrous oxides of Fe and Mn (FeOH-MnOH); D—2nd leachate for hydrous oxides of Fe and Mn (FeOH-MnOH); E—1st leachate for crystalline FeO; F—2nd leachate for crystalline FeO; G—sulphides; H—silicates and residual oxides. Value in bracket for Pb concentrations obtained by ICP analysis, and uncertainty is $\pm 10\%$ of quoted value. Dup. = duplicate analysis; (-) = not detected; * = average values for two runs.

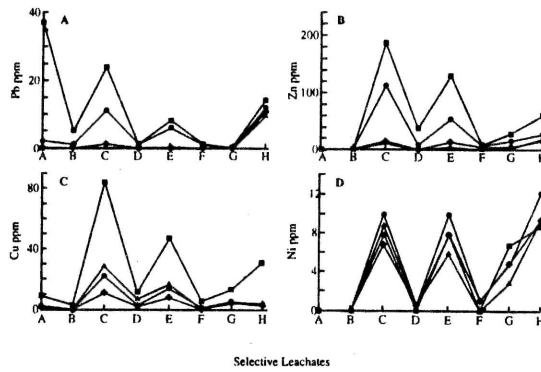


Fig. 3. Plots of elemental abundances vs selective leachates for till samples from Chisel Lake. Letters correspond to the following leachates: A—1st leachate for adsorbed and exchangeable metal; B—2nd leachate for adsorbed and exchangeable metal; C—1st leachate for hydrous oxides of Fe and Mn (FeOH–MnOH); D—2nd leachate for hydrous oxides of Fe and Mn (FeOH–MnOH); E—1st leachate for crystalline FeO; F—2nd leachate for crystalline FeO; G—sulfide leachate; H—silicate and/or residual oxide leachate. Solid square—90KDA 0011; Solid circle—90KDA 0015; Solid diamond—91KDA 0040; Solid triangle—91KDA 0042. A) Pb (ppm); B) Zn (ppm); C) Cu (ppm); D) Ni (ppm).

completely destroyed by glacial processes associated with till formation. The Pb isotopic ratios for the different Pb-bearing selective leachates will certainly provide much needed insight into the source of the Pb.

Pb isotopic ratios—Chisel Lake

Pb isotopic measurements for Pb-bearing selective leachates from Chisel Lake are listed in Table 4 and shown in Figs 5 and 6. Selective leachates A through F from anomalous samples 90KDA 0011 and 0015 contain relatively constant Pb isotopic ratios similar to those from the galena within the Chisel Lake VMS deposits (Fig. 5). In contrast, the silicate leachates (H) from both of these samples contain Pb isotopic ratios

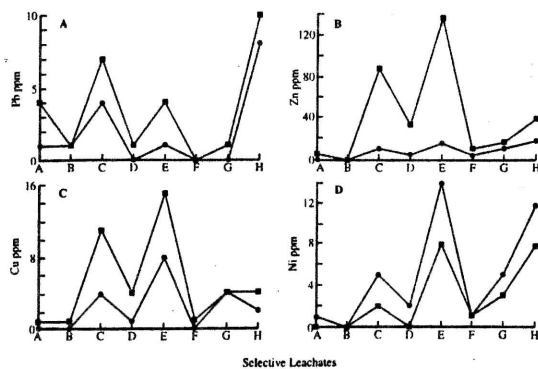


Fig. 4. Plots of elemental abundances vs selective leachates for Manitouwadge till samples. Letters representing selective leachates are as in Fig. 3 and Table 1. Solid square—MAN 128; Solid circle—MAN 200. A) Pb (ppm); B) Zn (ppm); C) Cu (ppm); D) Ni (ppm).

that are higher than those from the earlier leachates. The Pb isotopic ratios from total dissolution of the <63 μm fraction for both 90KDA 0011 and 0015 are intermediate between those obtained for the early leachates (adsorbed metal through to FeOH–MnOH, A to D), and those from the crystalline FeO (E) and silicate (H) leachates (Table 4). The Pb isotopic ratios for selective leachates from a separate, duplicate sequential leaching of 90KDA 0011 show excellent reproducibility, and, with one exception (silicate leachate-H), the duplicate analyses are the same order as duplicates on till (0.1%, 2 σ level, Table 4).

In contrast, the Pb isotopic composition for selective leachates from the 2 background till samples from Chisel Lake (91KDA 0040, 0042) differ from those obtained from the anomalous samples. Firstly, sample 91KDA 0042 contains Pb that is restricted mainly to the silicate minerals, whereas 91KDA 0040 contains Pb in both the first FeOH–MnOH (C) and silicate (H) leachates. All of these 3 leachates give Pb isotopic ratios that are much higher than the signature of the Chisel Lake galena. The highly radiogenic Pb isotopic composition ($^{206}\text{Pb}/^{204}\text{Pb} > 23.00$) for the FeOH–MnOH leachate (C) from sample 91KDA 0040 clearly shows that this Pb is derived from a different source to that found in the anomalous samples ($^{206}\text{Pb}/^{204}\text{Pb}$ range = 15.88 to 16.79). Pb in sample 91KDA 0040, was probably derived from the breakdown of rocks with much higher U/Pb ratios than VMS deposits such as those of the associated Proterozoic sequences. Another interesting feature is that the Pb isotopic ratios for the silicate leachates from both background samples approach the isotopic composition of the silicate leachates from the two anomalous samples (Fig. 5).

The $^{207}\text{Pb}/^{204}\text{Pb}$ versus $^{206}\text{Pb}/^{204}\text{Pb}$ isotopic plot shown in Fig. 6A shows that analyses from the <63 μm fraction (84 in total) of till from Chisel Lake taken from Bell and Franklin (1993) form a linear array, with a slope of 0.122 ± 0.003 (MSWD = 9.3; corresponding to a date of about 2000 Ma), where the lower end is close to the isotopic signature of the ore deposit. Also shown for reference in Fig. 6 is the Stacey and Kramers (1975) growth curve which reflects the variation of Pb isotopic ratios throughout geologic time in the source region that generated most massive sulfide deposits. The Pb isotopic data from the Chisel Lake ores are close to the 2000 Ma point on the Stacey–Kramers growth curve (Bell and Franklin, 1993). The Pb isotopic ratios determined for selective leachates from the Chisel Lake samples also lie along this same linear array (Fig. 6A). The selective leachates from one of the background samples, 91KDA 0040, show a variation in Pb isotopic ratios that covers much of the range displayed by the 84 analyses of <63 μm fraction of till samples from Chisel Lake. Figures 5 and 6 show that the Pb isotopic ratios for the FeOH–MnOH leachate (C) from background sample 91KDA 0040 are the most radiogenic recorded in any of the size fractions (both <63 and

Table 3. Mean and standard deviation values in ppm for various elements in control samples TILL-2 and LKSD-4 (from Hall *et al.*, in press)

Sample	PHASE					Total	Recommended [†]
	AEC (Leach. A + B)	Am Fe ox (Leach. C + D)	Cry Fe ox (Leach. E + F)	Sulphides (Leach. G)	Silicates (Leach. H)		
Pb:							
TILL-2 this study	5	10	4	-	10	29	
TILL-2*	4.8±0.8	10.2±0.4	<1	<1	8.0±0.7	22.8±1.4	31±3
LKSD-4*	4.6±0.8	16.0±1.2	<1	<1	6.2±3.3	84±10	91±6
Cu:							
TILL-2 this study	13	53	54	11	24	155	
TILL-2	12.2±0.9	56.1±1.9	46.6±1.3	8.3±2.2	22.4±2.0	146±3	150±10
LKSD-4	<1	6.8±0.4	4.6±0.9	11.4±3.0	2±0.4	32.2±2.4	31±4
Zn:							
TILL-2 this study	3	31	52	17	24	127	
TILL-2	3.0±0.3	34.1±1.0	44.9±1.4	13.8±2.0	24.0±2.0	120±3	130±8
LKSD-4	9.8±1.8	64.4±5.1	16.2±1.5	9.6±0.5	14.8±3.5	191±10	194±19
Ni:							
TILL-2 this study	-	9	20	6	11	46	
TILL-2	<1	3.1±1.0	14.6±1.6	5.8±2.1	8.5±0.9	33.3±2.5	32±3
LKSD-4	<1	10.2±0.8	4.0±1.0	4.8±0.4	5.2±1.3	30.6±1.5	31±5
Mn:							
TILL-2 this study	80	252	144	41	140	657	
TILL-2	86.8±8.3	292±11	125±8	43.8±4.0	145±21	693±46	780±28
LKSD-4	16.0±2.0	56.0±6.0	42.2±3.3	11.2±1.7	83.4±1.9	460±39	500±30
Fe:							
TILL-2 this study	339	8447	15890	4425	6240	35341	
TILL-2	403±52	10190±403	14866±600	4131±457	5821±585	35403±1036	37700±1300
LKSD-4	126±20	4610±580	7591±620	5397±278	4963±354	26182±142	28000±200
Co:							
TILL-2 this study	1	4	4	1	2	12	
TILL-2	1±1	4.8±0.5	4.8±1.7	1±1	3±1	14.5±1.4	15±2

[†]: Recommended values for LKSD-4 from Lynch (1990) and for TILL-2 from Hall *et al.* (in press).

*: Average value for 8 analyses.

†: Average value for 5 analyses. In addition, pyrophosphate extraction had been carried out on LKSD-4 prior to the sequential leach of Hall *et al.* (in press).

The total value includes this portion.

< 2 µm) of till samples from Chisel Lake analyzed to date.

Pb isotopic ratios—Manitouwadge

Pb isotopic results for Pb-bearing selective leachates from anomalous sample MAN 128 and background sample MAN 200 are shown in Table 5 and Figs 7 and 8. The data exhibit the following features: (1) Pb isotope ratios for selective leachates A through to E from the anomalous sample, MAN 128, are constant and similar to the ratios obtained from the galena associated with the Manitouwadge VMS deposits (Fig. 7); (2) the Pb isotopic composition for the sulfide leachate (G) from sample MAN 128 is the most radiogenic of all its leachates, and is clearly quite different to that of the associated ore deposit (Fig. 7); (3) the selective leachates A, C and E from background sample MAN 200 contain Pb isotopic ratios that are relatively constant but significantly higher than those from MAN 128 (Fig. 7); (4) the silicate leachate (H) from MAN 200 contains an isotopic composition equivalent to that for the silicate leachate from MAN 128 (Fig. 7).

²⁰⁶Pb/²⁰⁴Pb versus ²⁰⁷Pb/²⁰⁴Pb isotopic plot (Fig. 8A), shows that all the analyses from the < 63 µm fraction of the Manitouwadge tills plot along a linear array with a slope equivalent to a secondary isochron age of 2700 Ma (Bell and Card, in prep.), consistent with the ca. 2700 Ma age of the Geco and Willroy deposits. With the exception of the ²⁰⁸Pb/²⁰⁴Pb isotope ratio for sulfide leachate (G) from MAN 128, Pb isotope ratios from the selective leachates also plot along the same trends (Fig. 8). Figure 8 shows that most of the selective leachates (A to E) from anomalous sample MAN 128 fall closest to the analyses from the Manitouwadge ore (Bell and Card, in prep.), whereas all but one of those from background sample MAN 200 fall at the other end of the array, with very radiogenic Pb isotope ratios (²⁰⁶Pb/²⁰⁴Pb ~ 24.00).

Conventional leachates

During the development of the exploration technique using Pb isotopes as indicators of mineralization in glacial till, Bell and co-workers used an extraction technique that involved leaching of the till samples for

Table 4. Pb isotopic ratios for ore and selective Pb-bearing leachates for tills from Chisel Lake

Ore*	Measured†		
	²⁰⁶ Pb/ ²⁰⁴ Pb 15.42-15.46	²⁰⁷ Pb/ ²⁰⁴ Pb 15.16-15.22	²⁰⁸ Pb/ ²⁰⁴ Pb 35.00-35.17
90KDA 0011:			
< 63 μm fraction*	16.13	15.23	36.65
A	15.88	15.24	35.37
A-duplicate	15.90	15.26	35.44
B	15.89	15.24	35.34
B-duplicate	15.89	15.22	35.35
C	15.94	15.24	35.40
C-duplicate	15.96	15.26	35.48
D	16.01	15.24	35.44
D-duplicate	16.02	15.28	35.57
E	16.05	15.26	35.52
E-duplicate	16.04	15.26	35.52
F	no signal		
F-duplicate	16.21	15.27	35.67
H	17.44	15.41	37.46
H-duplicate	17.22	15.40	37.35
90KDA 0015:			
< 63 μm fraction*	17.16	15.39	36.90
A	16.70	15.33	35.85
B	16.75	15.32	35.82
C	16.79	15.37	35.94
D	16.79	15.32	35.90
F	17.53	15.40	36.65
H	17.39	15.40	37.61
91KDA 0040:			
< 63 μm fraction*	18.59	15.56	38.03
C	23.03	16.08	40.37
H	17.65	15.46	38.22
91KDA 0042:			
< 63 μm fraction*	20.31	15.77	40.24
H	19.02	15.65	39.82

†: Fractionation corrected ratios using a factor of $0.12\% \pm 0.02$ a.m.u. based on replicate analyses of NBS 982 Pb standard. *: Pb isotope ratios for ore and < 63 μm fraction taken from Bell and Franklin (1993).

about 2 h using 2.5N HCl. The results from the Pb isotope ratios of the leached Pb successfully delimited the mineralized areas, which were spatially similar to those that were found using complete dissolution of the samples with HF and HNO₃.

Conventional leaching experiments were conducted on all 6 till samples in order to measure their Pb isotopic composition and compare the results with those obtained from the selective leachates. 300 milligrams of till from the < 63 μm fraction were immersed in approximately 5 ml of cold, double-distilled 2.5 M HCl for roughly 2 h, and occasionally shaken. The leachate solution was decanted, centrifuged, evaporated to dryness, and then conditioned with 1 N HBr. The residue sample was subsequently dissolved using a multi-acid procedure (HF-HNO₃ mixture and then 6 M HCl). A similar leaching technique was used by Gulson *et al.* (1992) to dissolve

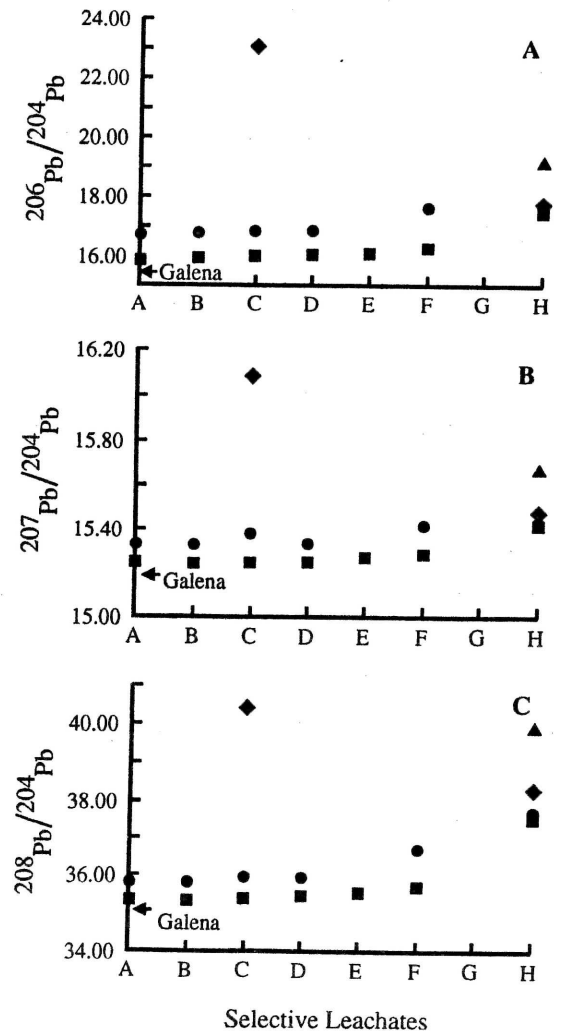


Fig. 5. Diagram showing Pb isotopic ratios for Pb-bearing selective leachates from Chisel Lake samples. Leachate letters and symbols as in Fig. 3. Pb isotopic ratios for galena taken from Bell and Franklin (1993). A) ²⁰⁶Pb/²⁰⁴Pb vs leachate; B) ²⁰⁷Pb/²⁰⁴Pb vs leachate; C) ²⁰⁸Pb/²⁰⁴Pb vs leachate.

Fe and Mn coatings of stream pebbles, from the Mount Emmons area (Colorado), for Pb isotopic analysis in order to determine their feasibility as a guide to concealed mineralization.

Pb isotope ratios for the conventional leachates and residues are shown in Table 6. Figures 9 and 10 show that of the analyses from the total dissolution of the < 63 μm fraction of tills from Chisel Lake (Bell and Franklin, 1993) and Manitouwadge (Bell and Card, in prep.) all but one plot between those obtained from their respective conventional leachate and residue. Anomalous samples 90KDA 0011, 0015, and MAN 128, have conventional leachates with Pb isotope ratios that are less radiogenic (i.e. more "ore-like") than the isotopic signature of the < 63 μm fractions (Figs 9 and 10), and give Pb isotopic ratios similar to those obtained from the earlier selective leachates-adsorbed metal (A,B), FeOH-MnOH

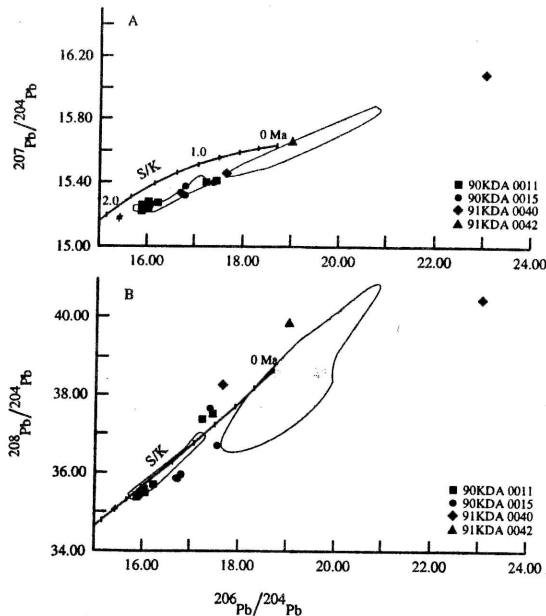


Fig. 6. Pb-Pb isotopic plots showing results for selective leachates from Chisel Lake samples. S/K = Stacey and Kramers (1975) Pb evolution curve; thicks along curve are at 0.25 Ga interval. Fields represent isotopic data from <63 μm fraction analyses (Bell and Franklin, 1993). + = galena analyses. A) $^{206}\text{Pb}/^{204}\text{Pb}$ vs $^{207}\text{Pb}/^{204}\text{Pb}$; B) $^{206}\text{Pb}/^{204}\text{Pb}$ vs $^{208}\text{Pb}/^{204}\text{Pb}$.

(C,D), or crystalline FeO leachates (E,F). The Pb isotopic composition for the residues from anomalous samples tend to approximate the ratios obtained from the silicate leachates for the same sample (Tables 4-6).

Similarly, the Pb isotopic composition for the

Table 5. Pb isotopic ratios for ore and selective Pb-bearing leachates for tills from Manitouwadge

Ore*	Measured†		
	$^{206}\text{Pb}/^{204}\text{Pb}$	$^{207}\text{Pb}/^{204}\text{Pb}$	$^{208}\text{Pb}/^{204}\text{Pb}$
Ore*	13.21-14.03	14.40-14.62	33.08-33.96
MAN 128:			
<63 μm fraction*	14.99	14.84	34.94
" duplicate	14.87	14.79	34.76
A	14.58	14.68	34.44
B	14.60	14.68	34.44
C	14.51	14.68	34.40
D	14.36	14.63	34.20
E	14.44	14.64	34.26
G	16.50	15.03	39.35
H	15.91	15.13	35.87
MAN 200:			
<63 μm fraction*	20.05	15.82	39.69
" duplicate	19.97	15.79	39.57
A	23.84	16.49	43.06
C	24.89	16.69	44.02
E	24.02	16.52	43.59
H	16.57	15.20	36.28

†: see Table 4 caption. *: Pb isotope ratios for ore and <63 μm fraction are taken from Bell and Card (in prep., unpublished data)

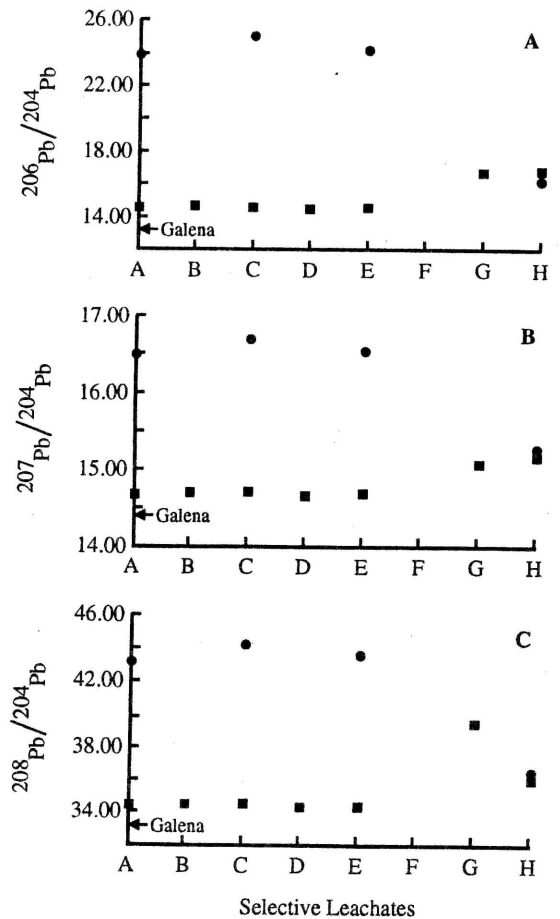


Fig. 7. Diagram showing Pb isotopic ratios for Pb-bearing selective leachates from Manitouwadge till samples. Leachate letters as in Fig. 3, and symbols as in Fig. 4. Pb isotopic ratios for galena taken from (Bell and Card, unpublished data). (A) $^{206}\text{Pb}/^{204}\text{Pb}$ vs leachate; (B) $^{207}\text{Pb}/^{204}\text{Pb}$ vs leachate; (C) $^{208}\text{Pb}/^{204}\text{Pb}$.

conventional leachates from background samples (91KDA 0040, 0042, MAN 200) are also similar to those obtained from the early selective leachates (adsorbed metal, FeOH-MnOH, or crystalline oxide) from the same samples. The Pb isotopic ratios for the conventional leachates from the background samples, however, are much more radiogenic than values obtained from complete dissolution of the <63 μm fraction (Tables 4-6). Most of the Pb isotope ratios from the selective and conventional leachates seem to plot in the same fields defined by the results from completely digested <63 μm fraction from both deposits (Bell and Franklin, 1993; Bell and Card, in prep.).

DISCUSSION

Selective leachates—weathering of till

Postglacial weathering of till typically occurs within the zone of oxidation above the groundwater or

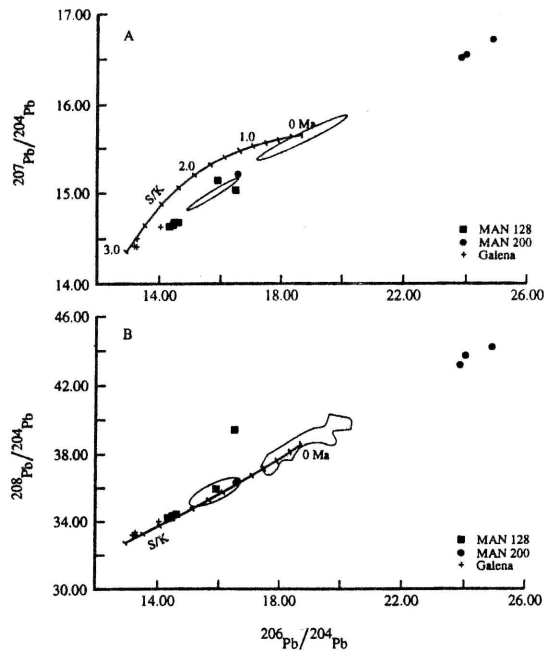


Fig. 8. Pb-Pb isotopic plot showing results for selective leachates of till samples from Manitouwadge. Fields represent data from $<63 \mu\text{m}$ fraction analyses (Bell and Card, unpublished data). Other symbols as in Fig. 6. (A) $^{207}\text{Pb}/^{204}\text{Pb}$ vs $^{206}\text{Pb}/^{204}\text{Pb}$; (B) $^{208}\text{Pb}/^{204}\text{Pb}$ vs $^{206}\text{Pb}/^{204}\text{Pb}$.

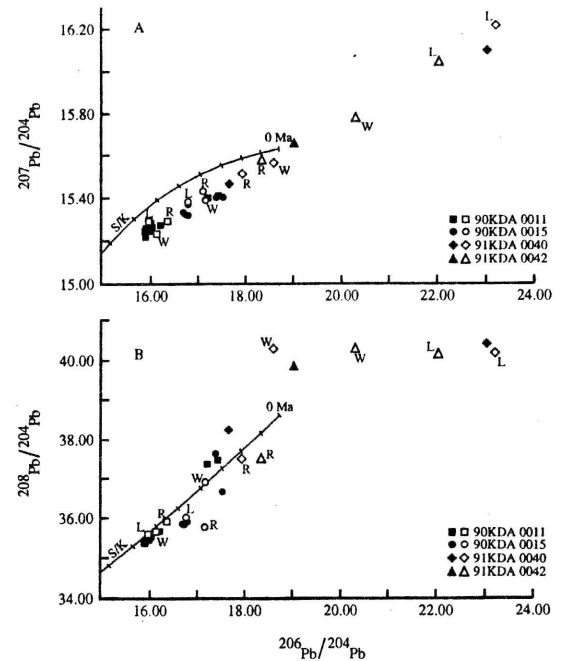


Fig. 9. Pb-Pb isotopic plot showing conventional leachate-residue (*open symbols*) results from Chisel Lake till samples. L—leachate; W— $<63 \mu\text{m}$ fraction analyses (Bell and Franklin, 1993); R—residue. Corresponding filled symbols are selective leachate results from same sample. Other symbols as in Fig. 6. (A) $^{207}\text{Pb}/^{204}\text{Pb}$ vs $^{206}\text{Pb}/^{204}\text{Pb}$; (B) $^{208}\text{Pb}/^{204}\text{Pb}$ vs $^{206}\text{Pb}/^{204}\text{Pb}$.

permafrost table, and this process can alter drift geochemistry to considerable depth below the surface (Rencz and Shilts, 1980; Shilts, 1976, 1984; Peuraniemi, 1984; Shilts and Kettles, 1990). The depth of

Table 6. Pb isotopic results from conventional leaching of Chisel Lake and Manitouwadge tills

	Measured [†]		
	$^{206}\text{Pb}/^{204}\text{Pb}$	$^{207}\text{Pb}/^{204}\text{Pb}$	$^{208}\text{Pb}/^{204}\text{Pb}$
Chisel Lake			
90KDA 0011:			
Leachate	15.96	15.29	35.58
Residue	16.36	15.29	35.91
90KDA 0015:			
Leachate	16.80	15.38	36.01
Residue	17.11	15.43	35.76
91KDA 0040:			
Leachate	23.21	16.20	40.83
Residue	17.94	15.51	37.74
91KDA 0042:			
Leachate	22.05	16.03	40.12
Residue	18.34	15.57	37.49
Manitouwadge			
MAN 128:			
Leachate	14.53	14.70	34.49
Residue	15.17	14.89	34.75
MAN 200:			
Leachate	24.67	16.62	43.80
Residue	17.77	15.40	36.67

[†]: see Table 4 caption.

leaching and oxidation in till, however, is dependent on the original abundance of pyrite and other sulfides present in the oxidized zone (Levinson, 1980). Sulfide grains in till found within the zone of oxidation, in particular pyrite, are usually completely or partly altered to limonite (Shilts and Kettles, 1990), goethite (Nikkariinen *et al.*, 1984) or other secondary form of sulfide (Peuraniemi, 1984). Shilts and Kettles (1990) show that the upper 2 m of weathered till near Thetford Mines, Québec, is enriched (by a factor of 2 over the deeper sections of till) in goethite, leucoxene and other secondary minerals formed as a result of alteration and destruction of sulfide minerals, suggesting that they were created by weathering. Breakdown of the sulphide minerals can have taken place either prior to glaciation during weathering of the bedrock, during glaciation, or during post-glacial weathering of till. The effects of pre-glaciation weathering of sulfide minerals is difficult to evaluate due to the later superimposition of complex glacial processes and their correlated effects. Compared to sulfide minerals, pre-glacial, finer-grained(?) secondary minerals are less likely to have remained intact and preserve the Pb isotopic signature of the VMS deposit during till formation, assuming they were imparted with the isotopic signature of the ore deposit. Unfortunately, this scenario cannot be evaluated. Despite the alteration and weathering that occurs within the oxidized zones of till, geochemical profiles for the $<63 \mu\text{m}$

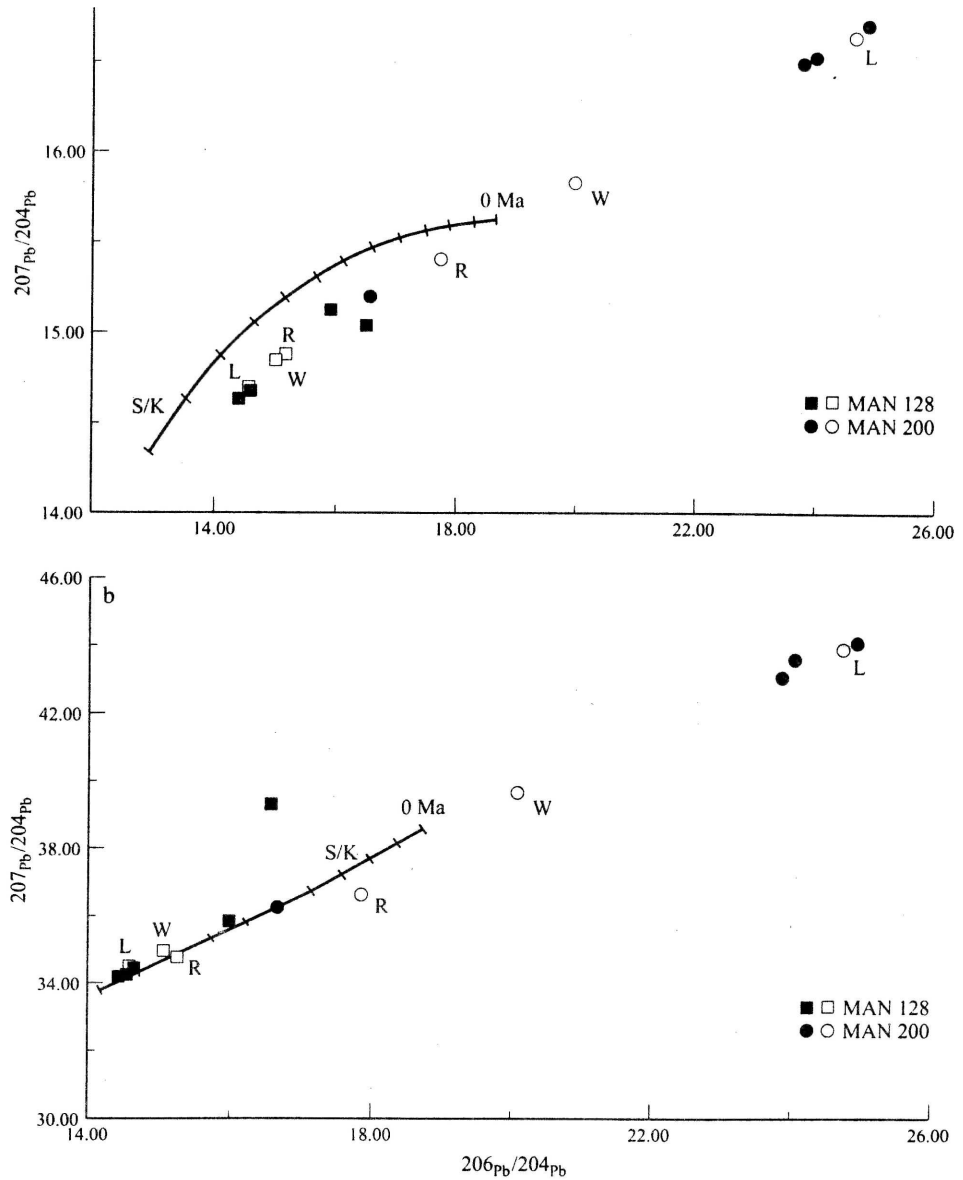


Fig. 10. Diagram showing Pb-Pb isotopic results from conventional leachate-residue (*open symbols*) from Manitouwadge till samples. L—leachate; W—<63 μm fraction analyses (Bell and Card, unpublished data); R—residue. Corresponding filled symbols are selective leachate results from same sample. Other symbols as in Fig. 6. (A) $^{206}\text{Pb}/^{204}\text{Pb}$ vs $^{207}\text{Pb}/^{204}\text{Pb}$; (B) $^{208}\text{Pb}/^{204}\text{Pb}$ vs $^{206}\text{Pb}/^{204}\text{Pb}$.

grain size fraction show that the concentration of base metals is constant with depth (e.g. Shilts and Kettles, 1990), indicating that the trace metals are effectively scavenged and retained proximal to their site of destruction. Most of the Pb found in the 3 anomalous samples has to have been derived from the breakdown of the sulphide minerals along with the release of Pb into the natural system.

In the anomalous samples, Pb which occurs as crystalline FeO leachate (E, F) may represent Pb isotopic analysis of primary, more resistant FeO phases with low U/Pb (i.e. magnetite and hematite), usually associated with VMS deposits. The Pb abundances of magnetite and hematite, however, are

much lower than those found in galena, which would mean that it would take large amounts of Fe oxides to swamp the isotopic signature of the galena. In addition, the crystalline FeO (E,F) and FeOH-MnOH leachates (C,D) contain high levels of Cu, Ni and Zn (Figs 3 and 4) suggesting sulfide minerals rather than magnetite and hematite which are not known to contain a large quantity of such elements. Although the Pb isotopic ratios for the selective leachates A to E from the anomalous samples are similar to the isotopic signature of the ore, they are not identical which indicates that a minor component of the Pb contained within these leachates was derived from a slightly more radiogenic source, possibly the

surrounding volcanic rocks found within the host greenstone belt.

The sulfide leachate (G) from anomalous sample MAN 128 contains Pb isotope ratios that are quite different to those obtained from ore associated with the Manitouwadge VMS deposits (Fig. 7). The presence of sulfide-held Pb in selective leachates, therefore, should not automatically be attributed to glacial dispersal of sulfide minerals from proximal VMS deposits. One possible explanation for the origin of the sulfide-held Pb in sample MAN 128 is that it may represent a mixture of Pb from more than one source, and which is now contained in sulfide. Several Pb isotopic studies of sulfide minerals associated with VMS deposits (e.g. Red Lake, Gulson *et al.*, 1993; Beardmore-Geraldton, Simonetti, unpublished data), however, clearly show that sulfide minerals associated with VMS deposits, such as pyrite, chalcopyrite and pyrrhotite, have not evolved with the same, low time-integrated μ ($^{238}\text{U}/^{204}\text{Pb}$) value which characterizes galena ($\mu \sim 0$) and as a result contain more variable and higher Pb isotopic ratios. The linear arrays in Pb–Pb isotope diagrams shown by the data from all of the selective leachates simply reflects the various Pb isotope ratios that are the result of differing μ (mu) values in the rocks that make up the host greenstone belt. Compared to silicate and other sulfide minerals, however, galena contains the mass balance of Pb within VMS deposits, and it is this feature which has guaranteed the successful application of Pb isotope ratios to till.

Pb concentrations and isotope composition for the selective leachates from the 3 background samples (91KDA 0040 and 0042, and MAN 200) show the following consistent features (Figs 5–10): (1) most of their Pb occurs in either silicates or residual oxides (leachate H); (2) the Pb isotopic composition for the silicate leachate is similar to that of the anomalous samples from the same deposit; (3) if present, the Pb isotopic signature for the adsorbed metal (A, B), FeOH–MnOH (C, D), or crystalline FeO (E, F) leachates are much more radiogenic than the same leachates from the anomalous samples. The highly radiogenic nature of these analyses (Figs 5 and 7) show that the background samples do not contain any Pb derived from the nearby VMS deposits as the result of glacial erosion and down ice sediment transport. Figures 1 and 2 confirm that samples 91KDA 0040 and 0042 and MAN 200 are either not directly down-ice from known ore deposits, or are too distal from them (> 4 km), which may explain their lack of a VMS-like Pb isotopic signature. The Pb isotopic ratios for the silicate leachates (H) from both anomalous and background samples are similar and are less radiogenic than the average value for present-day continental crust (0 Ma point of Stacey and Kramers (1975) Pb evolution curve). Compared to the Pb isotope ratios of sulfides (e.g. galena) from the associated VMS deposits, the silicate leachates from both groups of till contain more radiogenic Pb isotope

values, therefore, these leachates incorporate Pb from minerals with much higher time-integrated U/Pb ratios (μ values). Unlike the sulfide minerals, which have a higher specific gravity and are less-resistant to weathering, silicate components of the VMS terrains can be found at greater distances down-ice from the ore deposits.

All but one of the Pb isotopic measurements from the selective leachates ($n = 33$) plot along the linear arrays (Figs 6 and 8) defined by the analyses of the < 63 μm fraction of till from both Chisel Lake and Manitouwadge. This feature further supports the mixing model proposed for till formation at Chisel Lake (Bell and Franklin, 1993) involving end-members with differing U/Pb, and is consistent with the interpretation of the Pb–Pb arrays as relict secondary isochrons (Bell and Franklin, 1993). Additional support for this interpretation is provided by the Pb isotope ratios from the conventional leachates and residues which also plot along the same linear arrays (Figs 9 and 10).

Conventional leachates—new exploration tool

Pb isotopic ratios for the conventional leachates from anomalous till samples are less radiogenic (i.e. more "ore-like") than analyses from the complete dissolution of the < 63 μm fraction, whereas conventional leachates from background samples give Pb isotopic ratios that are more radiogenic, less "ore-like" than the < 63 μm fraction. In addition, conventional leachates for all samples contain Pb isotopic ratios (Table 6) that are similar to those obtained from the earlier selective leachates (adsorbed metal to FeOH–MnOH, A to C); whereas Pb isotopic ratios from the residues give isotopic ratios that are closer to those obtained from the silicate leachates (Tables 4–6). The difference in Pb isotopic ratios shown by the conventional leachate and residue for an individual sample, however, is not as large as that obtained from the selective leachates. With the exception of Fig. 9B, the Pb isotopic ratios for the conventional leachates and residues plot on the linear arrays defined by those from the selective leachates. One possible explanation for the scatter of the data points in Fig. 9B is sample heterogeneity since isotope results from conventional leaching (and residue), and whole rock analyses (Bell and Franklin, 1993; Bell and Card, in prep.) were obtained from separate aliquots of the same sample powder. Alternatively, the scatter may be attributed, in part, to a real variation in Th/U ratio in the Chisel Lake deposit and associated volcanic rocks, a feature that is supported by the large variation in $^{208}\text{Pb}/^{204}\text{Pb}$ ratio for a given $^{206}\text{Pb}/^{204}\text{Pb}$ value (Fig. 6B). However, since the Pb isotopic results from the conventional leachates approximate those obtained from the selective leachates, the former could be used as a first-order approximation to sequential leaching. A conventional leaching approach instead of total dissolution of a

particular grain size fraction of till would have resulted in a bimodal distribution of points rather than linear arrays in Pb-Pb isotopic plots (Figs 6 and 8). Conventional leachates from anomalous till samples would give "ore-like" Pb isotopic ratios, whereas those from background samples would give higher isotope ratios than the former (Figs 9 and 10), providing greater resolution between target areas. This greater difference in the Pb isotopic composition for conventional leachates between anomalous and background till samples would greatly facilitate selection of potential sites for further mineral exploration. The conventional leaching method, however, must be tested on additional till deposits surrounding VMS deposits.

CONCLUSIONS

Selective leachates for tills from Chisel Lake and Manitouwadge show similar results in that chalcophile elements such as Cu, Ni, Pb, and Zn (typically concentrated in VMS deposits), are bound as either adsorbed/exchangeable metals, hydroxides of Fe or Mn, crystalline Fe oxides, or silicates. Despite the proximity of some of the till samples to VMS deposits, a very small proportion of these chalcophile elements are held in the sulfide form. Lead isotopic ratios for Pb-bearing selective leachates from anomalous till samples suggest that the Pb and other chalcophile elements held as either an adsorbed/exchangeable metal, hydrous oxide of Fe or Mn, or crystalline Fe oxide were most probably derived from the breakdown of original sulfide minerals during glaciation. In contrast, Pb within the same leachates from background samples give isotopic compositions that are significantly more radiogenic than those from anomalous samples, which clearly suggests that this Pb does not originate from the associated VMS deposits. It is also interesting to note that Pb from natural sources can be relatively mobile, and that such Pb can be scavenged from solution in the natural environment and concentrated. In addition, only Pb isotopic ratios from till can accurately provide interpretations into the origin of the Pb (and other chalcophile elements), and that the latter can be at odds with interpretations based solely on elemental distribution patterns obtained from selective leachates.

We propose that conventional leaching rather than total dissolution of a particular grain size of till samples be conducted for mineral exploration purposes, since the former can be done more quickly and cheaply and the latter type of analysis tends to mask or reduce the "ore-like" Pb isotopic component within anomalous samples.

Acknowledgements—This project is funded entirely by the Natural Sciences and Engineering Research Council of Canada strategic grant "Mineral Exploration Using Pb

Isotopes in Glaciated Terrains" to K. Bell. We thank J. W. Card for organizing many of the technical aspects of the project. S. Bayne, J. W. Card, I. de Jong, S. Lange (GSC) and J. B. Murton are thanked for field and/or laboratory assistance. C. Kaszycki (GSC) for donating till samples from Chisel Lake; G. Charlton, H. Lockwood (chief geologist) and I. Wolfson from Noranda for support and donation of samples. We appreciate comments from J. B. Murton on an earlier version of the manuscript.

Editorial handling: Dr Olle Selinus

REFERENCES

- Antropova L. V., Goldberg I. S., Voroshilov N. A. and Ryss Ju. S. (1992) New methods of regional exploration for blind mineralization: application in the USSR. *J. Geochem. Explor.* **43**, 157-166.
- Bailes A. H. (1992) Wekusko Lake (North) Project (MTS 63J/13SW), *Manitoba Energy and Mines, Mineral Division, Report of Activities*, pp. 56-64.
- Bailes A. H. and Galley A. G. (1989) Geological setting of and hydrothermal alteration below the Chisel Lake massive Zn-Cu sulphide deposit, *Manitoba Energy and Mines, Minerals Division, Report of Field Activities*, pp. 31-45.
- Barnett P. J., Henry A. P. and Babuin D. (1991) Quaternary geology of Ontario, east-central sheet, *Ontario Geol. Surv.*, Map 2555.
- Bell K. and Franklin J. M. (1993) Application of lead isotopes to mineral exploration in glaciated terrains. *Geology* **21**, 1143-1146.
- Bell K. and Murton J. B. (1995) A new indicator of glacial dispersal: lead isotopes. *Quaternary Science Reviews* **14**, 275-287.
- Chao T. T. (1984) Use of partial dissolution techniques in geochemical exploration. *J. Geochem. Explor.* **20**, 101-135.
- Friesen R. G., Pierce G. A. and Weeks R. M. (1982) Geology of the Geco base metal deposit. *Geol. Assoc. of Canada Special Paper* **25**, 343-363.
- Galley A. G., Bailes A. H., Syme E. C., Bleeker W., Mackey J. J. and Gordon T. M. (1990) Geology and mineral deposits of the Flin Flon and Thompson belts, Manitoba (8th International Association for the Genesis of Ore Deposits Symposium field trip guidebook no. 10). *Geol. Surv. Canada, Open file* **2165**, 136.
- Geddes R. S. and Bajc A. F. (1985) Quaternary geology of the White Lake (Hemlo area), District of Thunder Bay, *Ontario Geol. Survey, Map*, **P. 2849**.
- Gulson B. L. (1986) Lead isotopes in mineral exploration. *Developments in Economic Geology* **23**, 245.
- Gulson B. L., Church S. E., Mizon K. J. and Meier A. L. (1992) Lead isotopes in iron and manganese oxide coatings and their use as an exploration guide for concealed mineralization. *Applied Geochemistry* **7**, 495-511.
- Gulson B. L., Mizon K. J. and Atkinson B. T. (1993) Source and timing of gold and other mineralization in the Red Lake area, northwestern Ontario, based on lead-isotope investigations. *Can. J. Earth Sci.* **30**, 2366-2379.
- Hall G. E. M., Vaive J. E., Beer R. and Hoashi M. Selective leaches revisited, with emphasis on the amorphous Fe oxyhydroxide phase extraction, *J. Geochem. Explor.*, (in press).
- Hall G. E. M., Vaive J. E. and Kaszycki C. (1993) The diagnostic capabilities of selective leaching. *Explore* **80**, 3-9.
- Hawkes H. E. and Webb J. S. (1962) *Geochemistry in Mineral Exploration*, Harper and Row.

- Jenne E. A. (1962) Controls on Mn, Fe, Co, Ni and Zn concentrations in soils and water: the significant role of hydrous Mn and Fe oxides. *Advances in Chemistry Series, Am. Chem. Soc.* **73**, 337-388.
- Kettles I. M. (1993a) Reconnaissance geochemical data for till samples from the Manitouwadge area. Ontario. *Geol. Surv. Canada, Open file* **2616**, 197.
- Kettles I. M. (1993b) Till geochemistry in the Manitouwadge area, Ontario. *Current Research, Geol. Surv. Canada, Paper* **93-1E**, 165-173.
- Kettles I. M. and Murton J. B. (1994) Till composition in the vicinity of the Manitouwadge greenstone belt, Ontario. *Geol. Surv. Canada, Curr. Res.* **1994-C**, 249-257.
- Kristjansson F. J. and Geddes R. S. (1985) Quaternary geology of the Manitouwadge area, Ontario. *Curr. Res. Geol. Surv. Canada* **93-1E**, 165-173.
- Levinson A. A. (1980) *Introduction to Exploration Geochemistry*, 2nd edition, Applied Publishing, Wilmette, Illinois, p. 924.
- Lynch J. J. (1990) Provisional elemental values for eight new geochemical lake sediment and stream sediment reference materials LKSD-1, LKSD-2, LKSD-3, LKSD-4, STSD-1, STSD-2, STSD-3 and STSD-4. *Geostand. Newsl.* **14**, 153-167.
- Nikkarinen M., Kallio E., Lestinen P. and Ayras M. (1984) Mode of occurrence of Cu and Zn in till over three mineralized areas in Finland. *J. Geochem. Explor.* **21**, 239-247.
- Peterson V. L. and Zaleski E. (1994) Structure and tectonics of the Manitouwadge greenstone belt and Wawa-Quetico subprovince boundary, Superior Province, northwestern Ontario. *Current Research, Geol. Surv. Canada* **1994-C**, 237-247.
- Peuraniemi V. (1984) Weathering of sulfide minerals in till in some mineralized areas in Finland. In: *Prospecting in Areas of Glaciated Terrain, Inst. Min. Metall.*, pp. 127-135, London.
- Rencz A. N. and Shilts W. W. (1980) Nickel in soils and vegetation of glaciated terrains. In *Nickel in the Environment*, (ed. Nriagu, J. O.), John Wiley and Sons, Inc., pp. 151-188.
- Shilts W. W. (1976) Glacial till and mineral exploration. In *Glacial Till*, (ed. Legett, R. F.), Special Publication 12, Royal Society of Canada, pp. 205-233.
- Shilts W. W. (1984) Till geochemistry in Finland and Canada. *J. Geochem. Explor.* **21**, 95-117.
- Shilts W. W. and Kettles I. M. (1990) Geochemical/mineralogical profiles through fresh and weathered till. In *Handbook of Glacial Indicator Tracing*, (eds Kujansuu, R. and Saarnisto, M.), pp. 187-216, Balkema, Rotterdam.
- Simonetti A., Bell K. and Viladkar S. G. (1995) Isotopic data from the Amba Dongar carbonatite complex, west-central India: Evidence for an enriched mantle source. *Chem. Geol.* **122**, 185-198.
- Stacey J. S. and Kramers J. D. (1975) Approximation of terrestrial lead isotope evolution by a two-stage model. *Earth Planet. Sci. Lett.* **26**, 207-221.
- Williams H. R. and Breaks F. W. (1989) Geological studies in the Manitouwadge-Hornpayne area. *Ontario Geol. Surv. Misc. Paper* **146**, 79-91.
- Williams H. R. and Breaks F. W. (1990) Geology of the Manitouwadge-Hornpayne area; *Ontario Geol. Surv. Open file*, Map **142**.
- Williams H. R., Breaks F. W., Schnieders B. R., Smyk M. C., Charlton S. G. and Lockwood H. C. (1990) Field Guide to the Manitouwadge area, In *Mineral Deposits in the western Superior Province, Ontario*, Open file 2164, pp. 7-25, Geol. Surv. Canada.
- Zaleski E. and Peterson V. L. (1993) Lithotectonic setting of mineralization in the Manitouwadge greenstone belt, Ontario: preliminary results. *Curr. Res. Geol. Surv. Canada* **93-1C**, 307-317.
- Zaleski E., Peterson V. L. and van Breemen O. (1994) Geological, geochemical and age constraints on base metal mineralization in the Manitouwadge greenstone belt, northwestern Ontario, *Current Research, Geol. Surv. Canada*, **1994-C**.

Application of a Sequential Extraction Scheme to Ten Geological Certified Reference Materials for the Determination of 20 Elements*

GWENDY E. M. HALL, GILLES GAUTHIER, JEAN-CLAUDE PELCHAT, PIERRE PELCHAT AND JUDY E. VAIVE

Geological Survey of Canada, 601 Booth Street, Ottawa, Ontario, Canada K1A 0E8

Methods are described for a sequential extraction scheme to dissolve selectively elements bound in soils and sediments in the following nominal forms: (1) adsorbed, exchangeable, carbonate (AEC); (2) amorphous iron oxyhydroxide (am Fe ox), including manganese oxides; (3) crystalline iron oxides (cry Fe ox); (4) organics and sulfides; and (5) residual (mainly silicates). This scheme has been applied in triplicate to a suite of ten international CRMs, *i.e.*, soils SRM 2709–2711 and the SO-1–4 series, marine mud MAG-1, lake sediment LKSD-4 and the till sample TILL-2. Elements determined comprise: As (by HG–quartz tube AAS, HG–QTAAS); Be, Ca, Co, Cr, Cu, Ni, P, Ti and V (by ICP-AES); Mn, Fe and Zn (by FAAS); and Cd, Ce, La, Li, Tl, Pb and U (by ICP-MS). The precision obtained is excellent, generally in the range 2–10% RSD, at concentrations 10 × higher than detection limits. Most results for the element concentrations summed over the five phases agree, within statistical uncertainties, with the recommended total values for the CRMs. Those where recoveries are significantly below 90% are for elements such as Cr and V, which are known to be present in refractory minerals and would require fusion for complete dissolution. The results presented herein for samples SO-1–4 and MAG-1 do not agree well with those recently published using a scheme purported to dissolve similar phases. This highlights the need to be more definitive in describing the nature and extent of the phases actually extracted so that comparisons can be made between different laboratories and studies.

Keywords: *Selective extraction; leach; speciation; soil; geological; standard reference material*

Selective dissolution techniques are currently of renewed interest in exploration geochemistry, and recently have been re-examined and further developed at the Geological Survey of Canada (GSC).^{1,2} The identification of the main binding sites of trace metals in surficial media not only helps in the understanding of geochemical processes but also allows one to predict the potential for remobilization, to determine the bioavailability of an element and to discriminate between sources (*e.g.*, atmospheric deposition *versus* hydromorphic transport *versus* clastic dispersion). The measurement of speciation is a much more challenging task than the determination of total content. A sequential extraction scheme consists of a series of successive chemical treatments of a sample, each being more drastic in action or of a different nature than the previous one. The order in which the extractants are used is critical and could well depend upon sample type and overall composition, and the objectives of the project. It must be recognized that the results obtained are 'operationally defined', *i.e.*, selectivity

is not 100% and is dependent upon such factors as the chemicals employed, the time and nature of contact, sample to volume ratio, *etc.* Results will also be dependent on the grain-size fraction chosen for analysis and whether coarser grains have been made finer by ball-milling, thus increasing exposure to attack. Published schemes include those of Sondag,³ Chao⁴ and Cardoso Fonseca and Martin,⁵ designed for application in exploration geochemistry, and that of Tessier *et al.*,⁶ applied mostly in environmental studies. The scheme adopted in the present work was devised by examining the strengths and weaknesses of the 'specific' reagents commonly employed, with consideration given to the variety of sample types (*e.g.*, lake and stream sediments, B-horizon soils) to be analysed and the objectives of the projects undertaken.² Of particular importance in exploration geochemistry is that portion of element bound to phases which have a high capacity to scavenge or adsorb labile elements; such phases include amorphous manganese oxide, amorphous iron oxyhydroxide and the 'soluble organic' component of humus (fulvic and humic complexes).

The water-soluble fraction of a soil or sediment is the first to be brought into solution in any sequential scheme. This fraction is usually negligible, except in areas where evaporites are present. Exchangeable metals, those held through electrostatic attraction on exchange sites on the surface and interface of negatively charged complexes of soils, also generally constitute a small proportion and can be replaced by neutral salts such as MgCl₂ or ammonium acetate (CH₃CO₂NH₄). It was decided to group exchangeable and adsorbed metals with those coprecipitated with carbonates and to extract this component (labelled here as AEC) with sodium acetate (CH₃CO₂Na), buffered at pH 5. Also extracted together, in the next step, are the hydrous oxides of Mn and Fe, the well known 'sinks' in the surficial environment for heavy metals. Scavenging by these secondary oxides, present as coatings on mineral surfaces or as fine discrete particles, can occur by any or a combination of the following mechanisms: coprecipitation; adsorption; surface complex formation; ion exchange; and penetration of the lattice. These mechanisms and their interrelations have been discussed by Chao and Theobald;⁷ clearly, predominant forms will depend upon the element in question and the physico-chemical conditions prevailing. Amorphous iron oxyhydroxide [Fe(OH)₃.nH₂O] is chemically more reactive than crystalline forms and it is on this basis that they are separated. Both Fe and Mn form mixed oxides, owing to their similar chemical properties and ionic radii. The relative importance of iron and manganese oxides as scavengers will depend upon such conditions as existing pH–Eh values, degree of oxide crystallinity, their abundances and presence of organic matter; it is impossible to generalize. Therefore, it was decided to group the extraction of manganese oxides together with that of amorphous iron oxyhydroxides. Chao and Zhou⁸ compared the speci-

* Presented at the 1996 Winter Conference on Plasma Spectrochemistry, Fort Lauderdale, FL, USA, January 8–13, 1996. GSC Contribution 1996122.

ficity of different reagents in the extraction of amorphous iron oxyhydroxides from soils and sediments. They demonstrated that, after 30–60 min in 0.25 mol l⁻¹ NH₂OH.HCl in 0.25 mol l⁻¹ HCl at 70 °C, further dissolution of the test amorphous iron oxides was minimal, while <1% of the crystalline iron oxides was dissolved except for one magnetite (ca. 2%). This extraction was chosen for the amorphous iron oxyhydroxide phase (am Fe ox), operating at a temperature of 60 °C to minimize dissolution of crystalline iron oxide. Research at the GSC with this leach led to a lowering of the strength of HCl to 0.05 mol l⁻¹, in order to minimize dissolution of monosulfides such as sphalerite (ZnS) and galena (PbS).² (Soluble organics such as humic and fulvic complexes will dissolve significantly in this leach and, if desired, can be removed by extraction with 0.1 mol l⁻¹ Na₄P₂O₇ solution first.) Hydroxylamine hydrochloride under stronger reducing conditions was selected for the next phase (cry Fe ox), after the method originally designed by Chester and Hughes for the partitioning of trace elements in pelagic sediments.⁹ This extractant consists of 1 mol l⁻¹ NH₂OH.HCl in 25% CH₃CO₂H and is carried out at 90 °C.

Metals bound to organic matter and sulfides are next in the sequence of most selective extraction schemes, assuming that these forms have not been previously dissolved to any significant degree. The type of action on the sample changes from reducing to oxidizing at this point. The highly oxidizing attack recommended by Chao and Sanzalone was chosen for the present work, being much more efficient than *aqua regia* or H₂O₂-HNO₃: digestion with KClO₃ and HCl followed by 4 mol l⁻¹ HNO₃ with gentle boiling.¹⁰ Finally, the common mixed acid attack of HCl-HF-HClO₄-HNO₃ is used in the proposed scheme to dissolve silicates and resistant mineral species from the residue. In some cases, where refractory primary minerals such as tourmaline, barite, beryl, chromite and sphenes are present, a small residue still persists.

Evidence for increased efficiency of extraction with fresh reagent, such as NH₂OH.HCl solution, added to the sample has been presented and discussed by Kersten and Forstner.¹¹ In the present scheme, each of the first three leaches in the sequence is repeated as significant proportions (up to 40%) of elements (e.g., Zn, Cu and Fe) were found to be further extracted by this second application.²

The present paper reports the application of this sequential extraction scheme to a suite of CRMs. There is now a momentum amongst agencies mandated to provide standards to certify these CRMs for partial or specific element concentrations in addition to total. For example, NIST is providing an addendum to its certificates for the soils SRM 2709–2711 where preliminary 'leach' data are given. The leach employed by the participating laboratories is that specified in Method 3050 of the US Environmental Protection Agency's (EPA) recommended methods list and is based on HNO₃-H₂O₂, an oxidizing attack which is not very specific. These soils were included in the present study. With a slightly different approach than that of NIST, the European Commission's Measurements and Testing Programme (formally known as the BCR) launched an action recently to harmonize these sequential extraction schemes and to certify soil and sediment reference materials for specific classifications of elements.^{12,13} While adequate agreement amongst laboratories can be obtained by adhering strictly to the recommended protocols, the three phases therein defined are vague (1, exchangeable, water and acid soluble; 2, reducible; and 3, oxidizable) and therefore limited in their usefulness for interpretative purposes. One could easily argue, for example, that the protocol of digestion in 0.1 mol l⁻¹ NH₂OH.HCl solution at 20 °C is by no means effective for quantitative dissolution of iron oxyhydroxides, species which should fall into the 'reducible' category.

The analytical techniques employed in the present work

were selected for compatibility for particular elements in these various extractants and include: HG quartz tube AAS (HG-QTAAS); ICP-AES; and ICP-MS. Elements determined were: As by HG-QTAAS; Be, Ca, Co, Cr, Cu, Ni, P, Ti and V by ICP-AES; Mn, Fe and Zn by FAAS; Cd, Ce, La, Li, Tl, Pb and U by ICP-MS.

EXPERIMENTAL

Reagents

All reagents used in this project were Baker (Phillipsburg, NJ, USA) 'analysed-reagent' grade. Standard solutions employed for calibration in the measurement techniques were purchased from High Purity Standards (Charleston, SC, USA). Distilled, de-ionized water was used throughout. Most of the leaches were performed in 'Falcon' poly(propylene) centrifuge tubes (Becton Dickinson, Lincoln Park, NJ, USA) and the Teflon centrifuge tubes employed in the later stages of the procedure were purchased from Nalgene (Rochester, NY, USA).

Instrumentation and Operating Conditions

A Perkin-Elmer Model 3030, in the air-acetylene mode, was employed for measurements by FAAS. The elements Fe, Mn and Zn were measured at 248.8, 279.5 and 213.9 nm, respectively. A Perkin-Elmer Model 5000, with an electrically heated quartz cell (at 800 °C) for atomization, was used for measurement of As at 193.7 nm by HG-QTAAS. The hydride generator was of GSC design. The 4 mol l⁻¹ HCl containing the analyte was pumped at 2 ml min⁻¹ to mix with 2% NaBH₄ solution at 0.6 ml min⁻¹. A 48 s wash with 4 mol l⁻¹ HCl was carried out between samples aspirated for 12 s. A conventional gas-liquid separator was employed.

The ICP-AES analysis for Be, Ca, Co, Cr, Cu, Ni, P, Ti and V was carried out using a Jobin-Yvon sequential Model 38 spectrometer. Operating conditions are given in Table 1; background correction on one or both sides of the analyte peak was employed where necessary.

The ICP-MS analysis was carried out using a VG PlasmaQuad 2+ (Winsford, Cheshire, UK). The operating conditions are given in Table 2. Corrections were made for spectral interferences of Sn and MoO on ¹¹⁴Cd by monitoring ¹¹⁸Sn and ¹⁹⁸Mo. All analyte solutions derived from the five extractions described below were diluted 50-fold in 1% HNO₃, just prior to nebulization. Calibration solutions were run after every eight samples; internal standards were not employed. Periodically, measurement by standard additions was carried out to confirm the absence of non-spectral matrix interferences.

For all analytical techniques, calibration solutions were prepared by spiking, with known amounts of analytes, 'blank'

Table 1 ICP-AES operating conditions

Torch	Demountable
Nebulizer	Concentric
Spray chamber	Scott, double pass
Rf power	1.15 kW
Reflected power	< 1 W
Outer gas flow rate	13 l min ⁻¹
Aerosol gas flow rate	0.3 l min ⁻¹
Intermediate gas flow rate	0.8 l min ⁻¹
Sample uptake rate	1 ml min ⁻¹
<i>Measurement parameters—</i>	
Integration time	1.5 s per peak (3 points per peak, 0.5 s each)
Number of readings	3
Lines measured	Be, 313.0; Ca, 422.7; Co, 228.6; Cr, 267.7; Cu, 324.7; Ni, 231.6; P, 213.6; Ti, 337.3; V, 311.1 nm

Table 2 ICP-MS operating conditions

Torch	Standard, short
Nebulizer	Concentric
Spray chamber	Scott, double pass, 0 °C
Rf power	1.35 kW
Reflected power	<1 W
Outer gas flow rate	12 l min ⁻¹
Aerosol gas flow rate	0.9 l min ⁻¹
Intermediate gas flow rate	0.8 l min ⁻¹
Sampler	1 mm, Ni
Skimmer	1 mm, Ni
<i>Measurement parameters—</i>	
Dwell time	320 μs
Channels per <i>m/z</i>	20
Sweep time	0.5 s
Integration time	20 s
Number of readings	3
Scan regions	5.6–8.4 (⁷ Li) 90.6–129.4 (¹¹⁴ Cd) 138.6–239.4 (¹³⁹ La, ¹⁴⁰ Ce, ²⁰⁵ Tl, ²⁰⁶ Pb, ²⁰⁷ Pb, ²⁰⁸ Pb, ²³⁸ U)

solutions of the particular extractants and the appropriate dilutions made.

Sequential Leach Procedure

A suite of ten certified reference samples (soils, a lake sediment and a marine basin sediment) was taken through the sequential extraction scheme in triplicate. Samples were taken from their bottles 'as received' from suppliers; they were not dried further. These CRMs are described in Table 3. The sequential procedure is shown schematically in Fig. 1. Extractions were carried out in air rather than under nitrogen as these samples were not anoxic and therefore changes in element distribution by air oxidation were not of concern. The procedure is as follows.

AEC phase

(1) To 1 g of sample in a 50 ml screw-cap centrifuge tube, add 20 ml of 1.0 mol l⁻¹ CH₃CO₂Na solution (at pH 5) and cap.

(2) Vortex the contents for 5–10 s and place in a horizontal shaker for 6 h.

(3) Centrifuge for 10 min at 2800 rev min⁻¹ and decant the supernatant liquid into a labelled test-tube. Rinse the residue with 5 ml of water, vortex and centrifuge again; do this twice and add the supernatant rinses to the test-tube. Make up to the 30.0 ml mark and analyse.

(4) Carry out a second 20 ml 1 mol l⁻¹ CH₃CO₂Na solution leach of the residue, repeating steps 2 and 3.

Table 3 Certified reference materials under investigation

CRM	Description	Source
SRM 2709	San Joaquin Soil [Soil (background) from San Joaquin Valley]	NIST
SRM 2710	Montana Soil Highly Elevated Traces (highly contaminated Montana soil)	NIST
SRM 2711	Montana Soil Moderately Elevated Traces	NIST
SO-1	Regosolic C-horizon soil	CCRMP*
SO-2	Podzolic B-horizon soil	CCRMP
SO-3	Calcareous C-horizon soil	CCRMP
SO-4	Chernozemic A-horizon soil	CCRMP
MAG-1	Marine mud (bottom sediment)	United States Geological Survey
LKSD-4	Composite centre lake sediment	CCRMP
TILL-2	Till from New Brunswick	CCRMP

* Canadian Certified Reference Materials Project.

Sequential extraction procedure

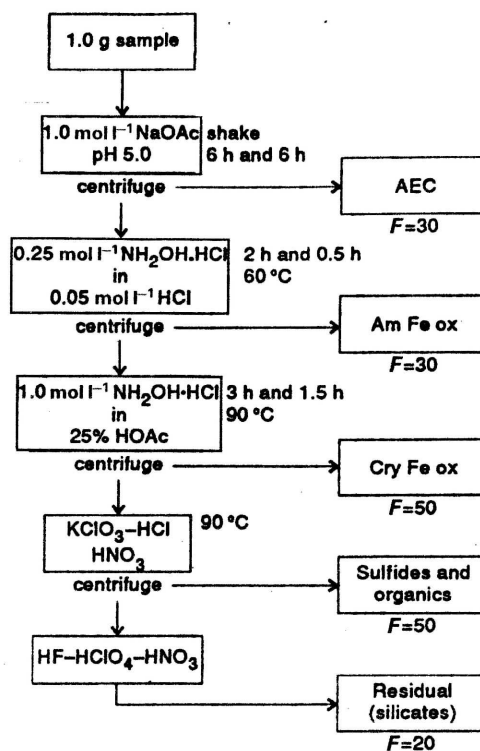


Fig. 1 Schematic diagram of the sequential extraction procedure. *F* is the initial dilution factor (e.g., *F* = 30 represents 1 g of sample diluted to 30 ml)

Am Fe ox phase

(5) To the residue from step 4, add 20 ml of 0.25 mol l⁻¹ NH₂OH.HCl in 0.05 mol l⁻¹ HCl, cap and vortex for 5–10 s.

(6) Place in a water-bath at 60 °C for 2 h with the cap loosened. Every 30 min, cap tightly and vortex the contents.

(7) Centrifuge for 10 min and decant the supernatant liquid into a labelled test-tube. Rinse the residue with 5 ml of water, vortex and centrifuge again; do this twice and add the supernatant rinses to the test-tube. Make up to the 30.0 ml mark and analyse.

(8) Carry out a second 0.25 mol l⁻¹ NH₂OH.HCl solution leach of the residue but heat for only 30 min.

Cry Fe ox phase

(9) To the residue from step 8, add 30 ml of 1.0 mol l⁻¹ NH₂OH.HCl solution in 25% CH₃CO₂H, cap and vortex for 5–10 s.

(10) Place in a water bath at 90 °C for 3 h with the cap on tightly. Vortex the contents every 20 min.

(11) Centrifuge for 10 min and decant the supernatant liquid into a labelled test-tube. Rinse the residue with 10 ml of 25% CH₃CO₂H, water, vortex and centrifuge again; do this twice and add the supernatant rinses to the test-tube. Make up to the 50.0 ml mark and analyse.

(12) Carry out a second 1.0 mol l⁻¹ NH₂OH.HCl solution leach of the residue but heat for only 1.5 h.

Organics and sulfides phase

(13) To the residue from step 12, add 750 mg of KClO₃ and 5 ml of 12 mol l⁻¹ HCl. Cap and vortex (care, as frothing can occur). Add a further 10 ml of HCl, cap and vortex.

(14) After 30 min, add 15 ml of water, cap, vortex and centrifuge for 10 min. Decant the supernatant liquid into a labelled test-tube.

(15) To the residue, add 10 ml of 4 mol l⁻¹ HNO₃, cap and vortex. Place in a water-bath at 90 °C for 20 min. After digestion, transfer all of the contents to a Teflon pressure tube.

(16) Vortex and centrifuge for 10 min. Decant the supernatant liquid into the previous labelled test-tube, in effect mixing the KClO₃-HCl extractant with this HNO₃ leachate.

(17) Rinse the residue with 5 ml of water, vortex and centrifuge again; do this twice and add the supernatant rinses to the test-tube. Make up to 50.0 ml and analyse.

Silicates and residual oxides phase

(18) To the residue, add 2 ml of 16 mol l⁻¹ HNO₃ and place in a dry heating block on a hot-plate at 200 °C. Heat to reduce the volume to ≈0.5 ml.

(19) After cooling, add 2 ml of 12 mol l⁻¹ HCl and heat for 20 min at 90 °C in the water-bath.

(20) After cooling, add 10 ml of the acid mixture (all concentrated) [HF (5 ml)-HClO₄ (3 ml)-HNO₃ (2 ml)] and cap tightly. Heat for 1 h at 90 °C in the water-bath.

(21) Transfer the contents to a Teflon beaker, rinsing with water for complete transfer. Evaporate at ≈70 °C overnight and raise the heat to ≈120 °C in the last stage to achieve incipient dryness.

(22) Add 1 ml of 12 mol l⁻¹ HCl and 3 ml of 16 mol l⁻¹ HNO₃ and swirl the contents. Add 3 ml of water and warm gently for 5–10 min. Transfer the contents to a calibrated test-tube, rinsing with water. Make up to 20.0 ml and analyse.

Analysis for As by ICP-MS was precluded, owing to significant spectral interference of ArCl on monoisotopic ⁷⁵As created by the variable amounts of Cl present in the different sample solutions. Hence, HG-QTAAS was used to determine As. The procedure routinely employed at the GSC to separate As (and other hydride forming elements) from potential transition metal interferences was applied here, *i.e.*, coprecipitation with La(OH)₃. Two ml of sample solution resulting from the five extractions above were taken and the following reagents added: 3 ml of 1% La(NO₃)₃ and 8 ml of 1+1 NH₄OH solution. After sitting overnight, the solution was centrifuged at 2800 rev min⁻¹ for 4 min and the supernatant decanted. The residue was dissolved in 7.5 ml of 4 mol l⁻¹ HCl, to which were added 750 μl of a 1+1 solution of 10% KI and 10% ascorbic acid, for prereduction of As^V to As^{III}. After 30 min, the solution was made up to 10.0 ml with 4 mol l⁻¹ HCl, ready for analysis by HG-QTAAS.

RESULTS AND DISCUSSION

The sequential leach results are presented in Tables 4–23, in the form of the mean and standard deviation obtained for

three separate 1 g samples of each CRM, accompanied by the recommended (denoted by an asterisk), proposed or information value (shown in parentheses) for total concentration compiled by Govindaraju.¹⁴ The uncertainties associated with these mean recommended values were obtained from original compilations of CRM data and from accompanying certificates.^{15–18} *i.e.*, certificates for SRMs 2709–2711; Gladney and Roelandts¹⁵ for SO-1–SO-4; Gladney and Roelandts¹⁶ for MAG-1; Lynch^{17,18} for LKSD-4; and Lynch¹⁸ for TILL-2. In summing the individual phase results for 'total' element concentration, raw data were used rather than data truncated at the detection limit. A 3σ instrumental detection limit was used, based on aspiration of the appropriate blank solution for each extraction.

Perhaps the most striking feature of the results is the excellent precision evident throughout, regardless of the significant number of manipulations involved in the sequential procedure. Most values for precision associated with the 'total' element result are in the range 1–5% RSD. Exceptions arise where concentrations are close to instrumental detection limit, as is the case for Be below 0.2 mg kg⁻¹ (ppm) (Table 5), Co below 5 mg kg⁻¹ (Table 9), Ni below 5 mg kg⁻¹ (Table 16) and Tl below 50 μg kg⁻¹ (ppb) (Table 20). The only surprising, poor result for precision is that of Ca in the AEC phase of SO-3 (Table 6), at 18% RSD, perhaps reflecting heterogeneity in this calcareous C-horizon soil. The five leaches of this procedure do not appear to differ in their inherent reproducibility.

Accuracy is almost impossible to assess in the present absence of CRMs certified for their phase-selective elemental compositions. However, comparison of the summed result with recommended values provides some estimate of overall accuracy. It is shown in Tables 4–23 that these two values agree within the respective standard deviations in the vast majority of cases. Exceptions to this, where recovery of the element is below 90% of the recommended value, are: As in SRM 2711 (87% of recommended value), SO-4 (85%) and LKSD-4 (76%); Be in LKSD-4 (66%) and TILL-2 (77%); Co in SO-2 (87%); Fe in SO-2 (87%); La in SO-4 (77%); Mn in SO-3 (83%), SO-4 (88%) and MAG-1 (86%); P in SRM 2709 (84%); Ti in SO-4 (82%); and Cr, U and V in various samples. The reason for these apparently low recoveries could well be that these elements are bound in resistant minerals in these samples and a fusion would be required to effect complete dissolution. Such minerals include chromite, spinel, beryl, zircon and tourmaline, known for hosting the elements listed above.

In these CRMs, the silicate phase dominates as the principal residence of Be, Ce (except in SO-1 and LKSD-4), Cr (except in SO-1), La (except in SO-1 and LKSD-4), Li (except in SO-1 and SO-3), Ti, Tl, U (except in SRM 2710 and LKSD-4) and V (except in SO-1 and SO-2). As expected, Ca is found predominantly in the AEC phase, except for SRM 2710, SO-1, SO-2 and TILL-2 where the silicate phase contains the majority of Ca. In most samples, the am Fe ox and cry Fe ox phases contain the greatest percentage of the Fe, Co, Cu, Ni, P and Zn contents. Arsenic and Pb are distributed amongst all phases without obvious bias, whereas Cd and Mn are held mostly in labile forms, in the first two phases extracted. These trends confirm the general observation made by Lynch in certification studies, that elements such as Cd, Co, Cu, Ni, Pb and Zn are efficiently extracted from lake sediments LKSD 1–4 and soils using only a hot *aqua regia* or HNO₃-HClO₄ attack.^{17,18} It is interesting that the dominance in the silicate phase (as opposed to more soluble phases) of Co in SRM 2711, Ni in SRM 2710 and Pb in SRM 2709 is also reflected in results reported by Kane *et al.*¹⁹ These workers found that EPA Method 3050 (digestion in H₂O₂-HNO₃) resulted in complete recovery of Co in SRM 2709 and SRM 2710, Ni in SRM 2709 and SRM 2711 and Pb in SRM 2710 and SRM 2711 but low recoveries

Table 4 Results (mean \pm s in mg kg⁻¹) for As: application of sequential leach procedure to CRMs in triplicate. Literature sources for this and all subsequent tables: (1) certificates for SRMs 2709–2711; (2) Gladney and Roelandts¹⁵ for SO 1–4; (3) Gladney and Roelandts¹⁶ for MAG-1; (4) Lynch¹⁷ and Lynch¹⁸ for LKSD-4; and (5) Lynch¹⁸ for TILL-2

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature
SRM 2709	1.24 \pm 0.03	1.20 \pm 0.01	9.51 \pm 0.05	4.13 \pm 0.17	1.58 \pm 0.07	17.3 \pm 0.2	17.7 \pm 0.8*
SRM 2710	56.5 \pm 0.57	403 \pm 18	108 \pm 2.0	18.3 \pm 0.65	14.8 \pm 0.32	631 \pm 17	626 \pm 38*
SRM 2711	28.6 \pm 1.23	32.1 \pm 0.49	22.6 \pm 0.45	5.34 \pm 0.06	3.42 \pm 0.02	91.6 \pm 2.0	105 \pm 8*
SO-1	0.105 \pm 0.009	0.119 \pm 0.004	0.705 \pm 0.028	0.714 \pm 0.034	0.473 \pm 0.023	2.12 \pm 0.04	2.0 \pm 0.2*
SO-2	0.184 \pm 0.001	0.294 \pm 0.004	0.342 \pm 0.011	0.148 \pm 0.10	0.212 \pm 0.013	1.18 \pm 0.007	1.17 \pm 0.13*
SO-3	0.134 \pm 0.005	0.207 \pm 0.003	1.43 \pm 0.02	0.333 \pm 0.006	0.370 \pm 0.022	2.38 \pm 0.05	2.51 \pm 0.13*
SO-4	0.400 \pm 0.026	0.555 \pm 0.003	3.07 \pm 0.01	0.799 \pm 0.040	1.45 \pm 0.05	6.31 \pm 0.05	7.40 \pm 0.22*
MAG-1	0.778 \pm 0.015	0.719 \pm 0.013	1.33 \pm 0.05	2.63 \pm 0.03	3.49 \pm 0.03	8.93 \pm 0.09	9.2 \pm 1.2
LKSD-4	0.961 \pm 0.052	2.72 \pm 0.05	4.67 \pm 0.06	2.83 \pm 0.05	0.897 \pm 0.087	12.1 \pm 0.17	16 \pm 1*
TILL-2	0.096 \pm 0.013	1.42 \pm 0.04	16.5 \pm 0.5	4.75 \pm 0.03	2.88 \pm 0.11	25.5 \pm 0.44	26 \pm 2

* Recommended value.

Table 5 Results for Be (mean \pm s in mg kg⁻¹): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	0.06 \pm 0.01	0.34 \pm 0.01	<0.05	0.20 \pm 0.13	3.81 \pm 0.03	4.44 \pm 0.16	—
SRM 2710	0.20 \pm 0.01	0.39 \pm 0.02	0.05 \pm 0.07	<0.05	1.32 \pm 0.05	1.92 \pm 0.14	—
SRM 2711	<0.05	0.41 \pm 0.02	0.09 \pm 0.07	0.09 \pm 0.01	1.32 \pm 0.03	2.08 \pm 0.20	—
SO-1	0.05 \pm 0.01	0.25 \pm 0.01	0.05 \pm 0.04	0.35 \pm 0.13	1.09 \pm 0.05	1.75 \pm 0.08	1.98 \pm 0.29
SO-2	0.06 \pm 0.01	0.19 \pm 0.08	0.05 \pm 0.01	0.08 \pm 0.11	1.69 \pm 0.08	2.07 \pm 0.15	2.0 \pm 0.3*
SO-3	<0.05	0.11 \pm 0.11	<0.05	<0.05	0.49 \pm 0.01	0.63 \pm 0.12	0.81 \pm 0.15
SO-4	<0.05	0.28 \pm 0.12	0.14 \pm 0.01	<0.05	0.71 \pm 0.01	1.14 \pm 0.12	1.26 \pm 0.14*
MAG-1	0.08 \pm 0.01	0.45 \pm 0.01	0.27 \pm 0.07	0.16 \pm 0.01	1.86 \pm 0.08	2.83 \pm 0.11	3.2 \pm 0.4*
LKSD-4	0.07 \pm 0.01	0.06 \pm 0.04	0.14 \pm 0.12	<0.05	0.38 \pm 0.01	0.66 \pm 0.11	1.0 \pm 0.03*
TILL-2	0.19 \pm 0.01	0.24 \pm 0.01	0.43 \pm 0.01	0.10 \pm 0.01	2.13 \pm 0.03	3.09 \pm 0.03	4.0 \pm 0.5

* Recommended value.

† See Table 4 for relevant references.

Table 6 Results for Ca (mean \pm s in %): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	1.237 \pm 0.001	0.067 \pm 0.001	0.025 \pm 0.001	0.025 \pm 0.001	0.556 \pm 0.033	1.911 \pm 0.039	1.89 \pm 0.05*
SRM 2710	0.276 \pm 0.013	0.081 \pm 0.004	0.039 \pm 0.000	0.036 \pm 0.002	0.801 \pm 0.043	1.234 \pm 0.061	1.25 \pm 0.3*
SRM 2711	1.819 \pm 0.074	0.188 \pm 0.012	0.028 \pm 0.001	0.038 \pm 0.001	0.844 \pm 0.030	2.919 \pm 0.077	2.88 \pm 0.08*
SO-1	0.256 \pm 0.004	0.109 \pm 0.003	0.059 \pm 0.001	0.136 \pm 0.001	1.214 \pm 0.096	1.775 \pm 0.098	1.76 \pm 0.10*
SO-2	0.013 \pm 0.001	0.251 \pm 0.001	0.105 \pm 0.001	0.035 \pm 0.001	1.653 \pm 0.032	2.058 \pm 0.030	1.98 \pm 0.10*
SO-3	9.198 \pm 1.666	3.455 \pm 0.045	1.251 \pm 0.106	0.029 \pm 0.001	0.473 \pm 0.015	14.41 \pm 1.78	14.8 \pm 1.0*
SO-4	0.522 \pm 0.002	0.093 \pm 0.001	0.011 \pm 0.001	0.019 \pm 0.002	0.516 \pm 0.008	1.163 \pm 0.004	1.11 \pm 0.09*
MAG-1	0.648 \pm 0.050	0.066 \pm 0.001	0.023 \pm 0.001	0.038 \pm 0.001	0.253 \pm 0.010	1.031 \pm 0.057	0.98 \pm 0.07*
LKSD-4	0.680 \pm 0.044	0.095 \pm 0.002	0.022 \pm 0.001	0.021 \pm 0.002	0.518 \pm 0.013	1.338 \pm 0.058	1.29 \pm 0.14*
TILL-2	0.030 \pm 0.001	0.039 \pm 0.001	0.021 \pm 0.001	0.039 \pm 0.001	0.825 \pm 0.033	0.956 \pm 0.032	0.91 \pm 0.05

* Recommended value.

† See Table 4 for relevant references.

Table 7 Results for Cd (mean \pm s in μ g kg⁻¹): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	158 \pm 10	84 \pm 3	111 \pm 14	14 \pm 3	34 \pm 6	401 \pm 27	380 \pm 10*
SRM 2710	14352 \pm 288	2424 \pm 144	453 \pm 24	2458 \pm 119	555 \pm 36	20243 \pm 445	21800 \pm 200*
SRM 2711	31201 \pm 924	4331 \pm 263	1222 \pm 30	483 \pm 15	188 \pm 15	37426 \pm 779	41700 \pm 250*
SO-1	24 \pm 6	34 \pm 4	35 \pm 20	37 \pm 52	<10	125 \pm 9	130 \pm 40
SO-2	25 \pm 8	39 \pm 10	18 \pm 7	<10	105 \pm 6	188 \pm 16	130 \pm 40
SO-3	83 \pm 7	<15	<15	<10	9 \pm 3	115 \pm 21	120 \pm 30
SO-4	102 \pm 7	179 \pm 18	58 \pm 6	<10	34 \pm 8	373 \pm 21	340 \pm 60
MAG-1	155 \pm 10	15 \pm 2	<15	<10	<10	200 \pm 2	202 \pm 29*
LKSD-4	1081 \pm 45	801 \pm 55	57 \pm 1	<10	19 \pm 4	1968 \pm 19	1900 \pm 500
TILL-2	69 \pm 14	93 \pm 7	167 \pm 6	17 \pm 5	20 \pm 4	366 \pm 30	300 \pm 200

* Recommended value.

† See Table 4 for relevant references.

for these elements in the third member of this series, in keeping with the present findings. NIST soil SRM 2710 is contaminated with high concentrations of Cu, Mn, Pb and Zn originating from flooding of nearby settling ponds containing effluent from the Anaconda processing plant in Butte, MT, USA. Thus the highest concentrations of these elements should exist in the first two labile phases (rather than in crystalline forms) of

the sequential leach procedure. This is borne out in Tables 11, 15, 18 and 23 where it is evident that these first two phases account for 82, 50, 88 and 51%, respectively, of the total Cu, Mn, Pb and Zn in this soil.

The distributions of elements in the marine mud MAG-1 and in the soil SO series, found in the present study, are in sharp contrast to those reported by Li *et al.*²⁰ using the scheme

Table 8 Results for Ce (mean \pm s in mg kg⁻¹): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	4.11 \pm 0.10	7.76 \pm 0.29	8.31 \pm 0.31	6.16 \pm 0.23	23.2 \pm 0.85	49.3 \pm 0.64	42
SRM 2710	5.27 \pm 0.18	9.80 \pm 0.43	10.7 \pm 0.43	4.83 \pm 0.16	33.7 \pm 0.98	64.3 \pm 0.88	57
SRM 2711	5.72 \pm 0.43	11.3 \pm 0.08	9.18 \pm 0.01	8.40 \pm 0.23	45.3 \pm 0.22	79.9 \pm 0.32	69
SO-1	13.6 \pm 0.16	29.6 \pm 1.90	39.5 \pm 0.57	11.8 \pm 0.44	11.1 \pm 0.17	106 \pm 0.9	102 \pm 10*
SO-2	4.55 \pm 0.07	29.5 \pm 0.16	33.1 \pm 0.32	3.68 \pm 0.09	55.2 \pm 2.96	126 \pm 3.0	112 \pm 8*
SO-3	7.43 \pm 0.21	3.20 \pm 0.20	6.48 \pm 0.12	2.95 \pm 0.13	12.0 \pm 0.24	32.0 \pm 0.41	34 \pm 2*
SO-4	0.36 \pm 0.03	6.53 \pm 0.12	11.4 \pm 0.28	5.81 \pm 0.03	35.8 \pm 0.20	59.9 \pm 0.10	54 \pm 1*
MAG-1	5.72 \pm 0.05	15.3 \pm 0.24	15.8 \pm 0.47	12.2 \pm 0.25	45.0 \pm 1.80	94.1 \pm 2.12	88 \pm 9*
LKSD-4	3.00 \pm 0.01	7.96 \pm 0.48	22.4 \pm 0.57	2.53 \pm 0.11	9.43 \pm 0.17	45.3 \pm 0.44	48 \pm 6*
TILL-2	3.65 \pm 0.02	9.92 \pm 0.13	13.3 \pm 0.10	15.2 \pm 0.14	78.4 \pm 3.40	121 \pm 3.3	98 \pm 7

* Recommended value.

† See Table 4 for relevant references.

Table 9 Results for Co (mean \pm s in mg kg⁻¹): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	0.70 \pm 0.06	6.01 \pm 0.13	4.03 \pm 0.12	1.02 \pm 0.49	2.46 \pm 0.30	14.22 \pm 0.88	13.4 \pm 0.7*
SRM 2710	0.43 \pm 0.15	3.53 \pm 0.40	1.17 \pm 0.61	2.49 \pm 0.64	2.41 \pm 0.93	10.03 \pm 0.95	10
SRM 2711	2.42 \pm 0.18	2.25 \pm 0.25	2.21 \pm 0.91	1.23 \pm 0.57	2.57 \pm 0.19	10.88 \pm 0.58	10
SO-1	<0.25	9.6 \pm 0.81	8.78 \pm 1.06	4.62 \pm 1.07	5.77 \pm 0.47	28.9 \pm 2.89	29 \pm 2*
SO-2	<0.25	0.46 \pm 0.08	0.80 \pm 0.55	<0.25	5.3 \pm 0.46	6.6 \pm 0.80	7.6 \pm 0.6*
SO-3	0.58 \pm 0.12	<0.25	1.96 \pm 0.16	<0.25	3.03 \pm 0.07	5.57 \pm 0.31	5.0 \pm 0.8
SO-4	<0.25	7.09 \pm 0.10	2.26 \pm 0.11	<0.25	1.06 \pm 0.59	10.6 \pm 0.68	10.4 \pm 1.4*
MAG-1	0.98 \pm 0.14	5.86 \pm 0.46	3.99 \pm 1.24	4.56 \pm 0.60	4.69 \pm 0.96	20.1 \pm 2.14	20.4 \pm 1.6*
LKSD-4	2.24 \pm 0.05	1.83 \pm 0.13	3.56 \pm 0.90	0.81 \pm 0.21	1.88 \pm 0.87	10.3 \pm 0.85	11 \pm 1*
TILL-2	0.85 \pm 0.05	4.59 \pm 0.46	4.01 \pm 0.84	2.29 \pm 0.88	2.27 \pm 1.02	14.0 \pm 1.25	15 \pm 2

* Recommended value.

† See Table 4 for relevant references.

Table 10 Results for Cr (mean \pm s in mg kg⁻¹): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	1.04 \pm 0.17	6.41 \pm 0.22	27.5 \pm 0.63	10.9 \pm 0.29	55.7 \pm 2.08	101 \pm 1.33	130 \pm 4*
SRM 2710	0.44 \pm 0.06	1.14 \pm 0.22	4.51 \pm 0.11	5.60 \pm 0.40	15.9 \pm 0.56	27.7 \pm 1.10	39
SRM 2711	<0.25	0.78 \pm 0.06	5.73 \pm 0.07	3.90 \pm 0.03	24.9 \pm 0.69	35.3 \pm 0.60	47
SO-1	<0.25	9.49 \pm 0.70	59.4 \pm 2.20	47.5 \pm 0.49	45.0 \pm 2.70	161 \pm 4.83	170 \pm 22*
SO-2	<0.25	0.71 \pm 0.16	1.85 \pm 0.05	0.51 \pm 0.01	5.20 \pm 0.31	8.37 \pm 0.61	12.3 \pm 1.3*
SO-3	0.64 \pm 0.17	<0.25	5.10 \pm 0.37	1.75 \pm 0.10	13.3 \pm 0.21	20.9 \pm 0.62	27 \pm 4*
SO-4	<0.25	0.56 \pm 0.04	5.80 \pm 0.11	4.19 \pm 0.04	31.1 \pm 0.53	41.6 \pm 0.56	64 \pm 9*
MAG-1	0.66 \pm 0.03	3.45 \pm 0.23	19.5 \pm 0.92	12.5 \pm 0.49	51.8 \pm 1.90	88.9 \pm 2.26	97 \pm 8*
LKSD-4	0.89 \pm 0.14	<0.25	6.64 \pm 0.18	6.08 \pm 0.22	12.6 \pm 0.38	26.2 \pm 0.26	33 \pm 6*
TILL-2	0.64 \pm 0.01	2.96 \pm 0.15	14.5 \pm 0.30	8.60 \pm 0.17	30.5 \pm 0.47	57.2 \pm 0.36	67 \pm 11

* Recommended value.

† See Table 4 for relevant references.

Table 11 Results for Cu (mean \pm s in mg kg⁻¹): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	<0.50	4.08 \pm 0.17	22.7 \pm 0.35	3.98 \pm 0.22	3.79 \pm 0.80	34.7 \pm 1.0	34.6 \pm 0.7*
SRM 2710	1501 \pm 43	925 \pm 58	400 \pm 3.8	96.5 \pm 0.80	40.9 \pm 1.46	2964 \pm 12	2950 \pm 130*
SRM 2711	15.5 \pm 0.92	33.9 \pm 1.48	36.8 \pm 1.33	22.2 \pm 0.42	5.26 \pm 0.20	115 \pm 1	114 \pm 2*
SO-1	1.57 \pm 0.01	13.1 \pm 0.75	29.2 \pm 0.21	11.5 \pm 0.41	5.67 \pm 0.61	61.1 \pm 1.0	61 \pm 5*
SO-2	<0.50	1.44 \pm 0.05	2.61 \pm 0.10	0.88 \pm 0.07	3.11 \pm 1.02	8.03 \pm 0.50	8 \pm 3
SO-3	<0.50	<0.50	9.84 \pm 0.66	1.66 \pm 0.10	2.73 \pm 0.05	14.7 \pm 0.60	17 \pm 2*
SO-4	<0.50	0.88 \pm 0.01	9.99 \pm 0.56	4.61 \pm 0.09	7.37 \pm 1.25	22.9 \pm 0.83	21 \pm 2*
MAG-1	<0.50	2.21 \pm 0.52	11.1 \pm 0.24	13.1 \pm 0.81	4.35 \pm 0.35	30.8 \pm 1.02	30 \pm 3*
LKSD-4	<0.50	1.50 \pm 0.07	12.9 \pm 0.29	13.4 \pm 0.20	3.05 \pm 0.09	30.8 \pm 0.37	31 \pm 4*
TILL-2	11.8 \pm 0.27	26.1 \pm 0.41	81.6 \pm 0.30	15.5 \pm 0.25	21.0 \pm 0.40	156 \pm 0.78	150 \pm 10

* Recommended value.

† See Table 4 for relevant references.

described by Tessier *et al.*⁶ That protocol is designed to extract the following nominal classifications of element form: (1) exchangeable; (2) bound to carbonate and adsorbed; (3) bound to iron-manganese oxides; (4) bound to organic matter and sulfides; and (5) residual. The first two phases, equivalent to AEC in the present scheme, are interpreted as being relatively unstable under natural conditions (*e.g.*, elements in the first

phase are loosely termed 'bioavailable') whereas the last three are considered as residence sites where elements are strongly bound and retained. Amorphous and crystalline iron and manganese oxides are not differentiated in the scheme of Tessier *et al.* and are interpreted by Li *et al.* as both reporting to the 'iron-manganese oxide' phase (3) extracted by 0.04 mol l⁻¹ NH₂OH.HCl in 25% CH₃CO₂H at 96°C. Some of the

Table 12 Results for Fe (mean \pm s in %): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	0.006 \pm 0.001	0.524 \pm 0.055	1.70 \pm 0.124	0.421 \pm 0.007	0.802 \pm 0.008	3.441 \pm 0.010	3.49 \pm 0.11*
SRM 2710	0.009 \pm 0.000	0.942 \pm 0.025	0.733 \pm 0.004	0.511 \pm 0.004	0.861 \pm 0.019	3.072 \pm 0.024	3.37 \pm 0.10*
SRM 2711	0.004 \pm 0.002	0.408 \pm 0.013	0.762 \pm 0.046	0.400 \pm 0.008	0.988 \pm 0.011	2.610 \pm 0.003	2.88 \pm 0.06*
SO-1	0.030 \pm 0.000	0.624 \pm 0.026	1.875 \pm 0.025	1.836 \pm 0.029	1.151 \pm 0.027	5.669 \pm 0.067	5.99 \pm 0.22*
SO-2	0.148 \pm 0.002	0.785 \pm 0.007	1.238 \pm 0.012	0.178 \pm 0.015	2.424 \pm 0.072	4.775 \pm 0.079	5.51 \pm 0.21*
SO-3	0.032 \pm 0.004	0.283 \pm 0.000	0.668 \pm 0.005	0.101 \pm 0.005	0.454 \pm 0.013	1.541 \pm 0.019	1.55 \pm 0.07*
SO-4	0.001 \pm 0.000	0.443 \pm 0.003	0.984 \pm 0.006	0.159 \pm 0.022	0.665 \pm 0.010	2.254 \pm 0.014	2.35 \pm 0.10*
MAG-1	0.001 \pm 0.000	0.647 \pm 0.009	1.45 \pm 0.054	1.03 \pm 0.037	1.196 \pm 0.249	4.327 \pm 0.062	4.75 \pm 0.21*
LKSD-4	0.026 \pm 0.000	0.656 \pm 0.008	1.08 \pm 0.008	0.546 \pm 0.010	0.444 \pm 0.005	2.749 \pm 0.003	2.85 \pm 0.2*
TILL-2	0.019 \pm 0.000	0.762 \pm 0.013	1.757 \pm 0.016	0.643 \pm 0.019	0.528 \pm 0.003	3.711 \pm 0.123	3.84 \pm 0.17

* Recommended value.

† See Table 4 for relevant references.

Table 13 Results for La (mean \pm s in mg kg⁻¹): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	1.77 \pm 0.07	3.48 \pm 0.17	4.09 \pm 0.13	3.12 \pm 0.09	7.92 \pm 0.32	20.4 \pm 0.43	23
SRM 2710	2.81 \pm 0.11	4.92 \pm 0.17	5.72 \pm 0.23	2.95 \pm 0.06	9.41 \pm 0.27	25.8 \pm 0.23	34
SRM 2711	2.76 \pm 0.22	5.78 \pm 0.02	4.70 \pm 0.01	4.46 \pm 0.03	18.0 \pm 0.38	35.7 \pm 0.37	40
SO-1	16.2 \pm 0.19	11.2 \pm 0.53	13.6 \pm 0.13	7.02 \pm 0.31	5.58 \pm 0.05	53.6 \pm 0.25	54 \pm 2*
SO-2	1.79 \pm 0.04	11.1 \pm 0.03	8.02 \pm 0.16	1.87 \pm 0.03	21.6 \pm 1.19	44.4 \pm 1.13	46.5 \pm 0.7*
SO-3	4.02 \pm 0.18	1.18 \pm 0.04	2.44 \pm 0.06	1.50 \pm 0.05	6.19 \pm 0.17	15.3 \pm 0.40	16.9 \pm 1.3*
SO-4	0.15 \pm 0.02	3.87 \pm 0.04	4.68 \pm 0.18	2.81 \pm 0.05	10.2 \pm 0.18	21.8 \pm 0.12	28.2 \pm 1.7*
MAG-1	2.90 \pm 0.01	7.35 \pm 0.12	6.60 \pm 0.23	5.82 \pm 0.09	17.9 \pm 0.40	40.6 \pm 0.54	43 \pm 4*
LKSD-4	1.86 \pm 0.02	6.39 \pm 0.37	10.5 \pm 0.37	1.22 \pm 0.06	4.70 \pm 0.05	24.7 \pm 0.18	26 \pm 2*
TILL-2	2.03 \pm 0.02	3.75 \pm 0.03	2.83 \pm 0.07	7.95 \pm 0.12	28.4 \pm 1.57	44.9 \pm 1.48	44 \pm 4

* Recommended value.

† See Table 4 for relevant references.

Table 14 Results for Li (mean \pm s in mg kg⁻¹): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	2.04 \pm 0.14	5.44 \pm 0.18	14.84 \pm 0.09	4.39 \pm 0.06	28.9 \pm 1.49	55.7 \pm 1.7	—
SRM 2710	1.06 \pm 0.09	1.93 \pm 0.02	7.92 \pm 0.10	6.19 \pm 0.21	21.5 \pm 0.29	38.6 \pm 0.56	—
SRM 2711	0.42 \pm 0.01	1.55 \pm 0.03	5.50 \pm 0.09	2.41 \pm 0.04	16.4 \pm 0.27	26.3 \pm 0.31	—
SO-1	1.08 \pm 0.02	4.72 \pm 0.12	17.7 \pm 0.19	11.7 \pm 0.45	11.2 \pm 0.33	46.4 \pm 0.07	48 \pm 2*
SO-2	<0.02	0.25 \pm 0.03	2.27 \pm 0.03	0.21 \pm 0.03	7.81 \pm 0.11	10.6 \pm 0.08	9 \pm 2
SO-3	0.61 \pm 0.01	0.56 \pm 0.00	4.71 \pm 0.03	0.83 \pm 0.08	4.58 \pm 0.05	11.4 \pm 0.09	9 \pm 3
SO-4	0.14 \pm 0.02	0.88 \pm 0.02	4.22 \pm 0.19	0.94 \pm 0.01	14.7 \pm 0.10	20.9 \pm 0.30	17 \pm 4
MAG-1	2.60 \pm 0.00	8.02 \pm 0.20	24.7 \pm 0.85	9.25 \pm 0.67	32.0 \pm 0.26	76.7 \pm 0.71	79 \pm 4*
LKSD-4	0.13 \pm 0.00	0.54 \pm 0.00	4.50 \pm 0.10	1.77 \pm 0.09	4.85 \pm 0.09	11.8 \pm 0.08	12 \pm 2*
TILL-2	0.16 \pm 0.01	2.01 \pm 0.07	17.8 \pm 0.29	8.09 \pm 0.25	20.0 \pm 0.63	48.1 \pm 0.68	47 \pm 4

* Recommended value.

† See Table 4 for relevant references.

Table 15 Results for Mn (mean \pm s in mg kg⁻¹): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	135 \pm 4	166 \pm 2	103 \pm 2	25 \pm 1	63 \pm 1	492 \pm 5	534 \pm 17*
SRM 2710	1005 \pm 7	4522 \pm 15	1525 \pm 6	165 \pm 2	1851 \pm 25	9068 \pm 40	10100 \pm 400*
SRM 2711	236 \pm 4	124 \pm 2	58 \pm 1	23 \pm 1	129 \pm 1	570 \pm 6	638 \pm 28*
SO-1	30 \pm 1	280 \pm 9	159 \pm 1	138 \pm 7	173 \pm 3	780 \pm 5	851 \pm 40*
SO-2	17 \pm 1	63 \pm 1	58 \pm 2	6 \pm 0	509 \pm 10	652 \pm 11	666 \pm 40*
SO-3	229 \pm 10	84 \pm 1	52 \pm 1	7 \pm 0	78 \pm 2	450 \pm 10	542 \pm 30*
SO-4	123 \pm 2	315 \pm 2	39 \pm 1	6 \pm 0	58 \pm 1	542 \pm 2	619 \pm 30*
MAG-1	135 \pm 2	143 \pm 2	181 \pm 9	82 \pm 4	112 \pm 1	654 \pm 8	758 \pm 70*
LKSD-4	223 \pm 2	62 \pm 1	68 \pm 1	17 \pm 1	84 \pm 1	453 \pm 3	464 \pm 30*
TILL-2	70 \pm 1	253 \pm 3	156 \pm 2	64 \pm 1	158 \pm 2	701 \pm 3	780 \pm 28

* Recommended value.

† See Table 4 for relevant references.

differences in the results from these two schemes are illustrated in Fig. 2. The concentrations of elements reporting to phases (1) and (2) in Li *et al.* have been added together and represented by AEC, whereas phase (3) has been labelled as equivalent to am Fe ox, in contrast to their interpretation but more in keeping with applications described by Tessier *et al.*²¹ The contrast in results is alarming. In general, Li *et al.* found a

much higher percentage of element in the 'residual' phase, usually taken to mean silicates and, to a lesser extent, resistant sulfides and refractory organics.⁶ The postulation that the predominant form of elements such as Zn and Cu in these soils is in the silicate phase rather than bound as oxides, oxyhydroxides, carbonates, adsorbed on iron, manganese or aluminium oxides or with organic substances (as complexes,

Table 16 Results for Ni (mean \pm s in mg kg⁻¹): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	4.01 \pm 0.23	26.1 \pm 0.51	39.4 \pm 1.02	7.85 \pm 0.26	12.8 \pm 0.56	90.1 \pm 1.02	88 \pm 5*
SRM 2710	<1.0	1.50 \pm 0.25	2.53 \pm 0.09	3.59 \pm 0.13	4.35 \pm 0.19	12.8 \pm 0.53	14.3 \pm 1.0*
SRM 2711	1.12 \pm 0.65	5.09 \pm 0.38	6.30 \pm 0.32	2.75 \pm 0.17	4.79 \pm 0.16	21.0 \pm 0.46	20.6 \pm 1.1*
SO-1	<1.0	9.5 \pm 0.81	35.9 \pm 2.28	25.2 \pm 0.20	23.8 \pm 1.41	95 \pm 2.66	92 \pm 12*
SO-2	<1.0	<1.0	<1.0	0.96 \pm 0.68	2.53 \pm 0.34	4.82 \pm 1.12	8 \pm 2
SO-3	<1.0	<1.0	5.17 \pm 0.08	1.68 \pm 0.19	4.36 \pm 0.65	13.1 \pm 0.76	14 \pm 5
SO-4	<1.0	8.6 \pm 0.34	8.30 \pm 0.53	1.99 \pm 0.04	6.35 \pm 0.37	25.3 \pm 0.73	24 \pm 4
MAG-1	3.40 \pm 0.20	11.6 \pm 0.74	19.0 \pm 0.93	9.49 \pm 0.57	10.8 \pm 0.50	54.3 \pm 1.36	53 \pm 8*
LKSD-4	4.85 \pm 0.11	9.2 \pm 0.50	8.85 \pm 1.23	6.04 \pm 0.25	5.38 \pm 0.16	34.4 \pm 1.36	31 \pm 5*
TILL-2	<1.0	3.28 \pm 0.24	16.7 \pm 0.36	8.80 \pm 0.17	7.51 \pm 0.28	35.6 \pm 0.51	32 \pm 3

* Recommended value.

† See Table 4 for relevant references.

Table 17 Results for P (mean \pm s in mg kg⁻¹): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	<10	281 \pm 11	169 \pm 7	<10	61 \pm 3	519 \pm 15	620 \pm 50*
SRM 2710	13 \pm 1	748 \pm 64	109 \pm 1	<10	124 \pm 7	996 \pm 69	1060 \pm 150*
SRM 2711	31 \pm 4	650 \pm 42	75 \pm 5	<10	83 \pm 6	840 \pm 32	860 \pm 70*
SO-1	<10	303 \pm 29	268 \pm 29	<10	37 \pm 2	608 \pm 44	654 \pm 80*
SO-2	108 \pm 2	1470 \pm 53	1566 \pm 4	<10	39 \pm 4	3184 \pm 52	3008 \pm 200*
SO-3	<10	124 \pm 19	275 \pm 23	<10	<10	399 \pm 9	479 \pm 70*
SO-4	<10	204 \pm 8	178 \pm 36	222 \pm 7	226 \pm 5	840 \pm 54	872 \pm 70*
MAG-1	52 \pm 2	319 \pm 27	82 \pm 12	46 \pm 8	159 \pm 2	660 \pm 28	710 \pm 90*
LKSD-4	31 \pm 3	455 \pm 6	483 \pm 9	216 \pm 13	223 \pm 16	1410 \pm 3	1438 \pm 130*
TILL-2	<10	126 \pm 31	296 \pm 25	<10	188 \pm 4	611 \pm 53	750 \pm 80

* Recommended value.

† See Table 4 for relevant references.

Table 18 Results for Pb (mean \pm s in mg kg⁻¹): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	1.00 \pm 0.11	4.68 \pm 0.32	6.70 \pm 0.12	0.653 \pm 0.048	7.17 \pm 0.67	20.2 \pm 0.98	18.9 \pm 0.15*
SRM 2710	2797 \pm 7.0	2021 \pm 5.0	359 \pm 7.3	63.0 \pm 1.16	217 \pm 2.38	5457 \pm 8.6	5532 \pm 80*
SRM 2711	843 \pm 6.2	235 \pm 2.9	48.2 \pm 1.94	3.68 \pm 0.08	13.4 \pm 0.40	1144 \pm 8.5	1162 \pm 31*
SO-1	0.352 \pm 0.017	3.79 \pm 0.30	5.42 \pm 0.55	0.820 \pm 0.066	8.23 \pm 0.12	18.7 \pm 0.48	20 \pm 3*
SO-2	1.02 \pm 0.03	2.38 \pm 0.03	2.01 \pm 0.04	0.109 \pm 0.017	13.1 \pm 0.51	18.7 \pm 0.40	20 \pm 2*
SO-3	2.96 \pm 0.19	1.32 \pm 0.05	4.45 \pm 0.07	0.285 \pm 0.090	3.82 \pm 0.12	12.8 \pm 0.12	13 \pm 3
SO-4	0.163 \pm 0.004	4.90 \pm 0.16	4.18 \pm 0.07	0.237 \pm 0.020	5.68 \pm 0.09	15.1 \pm 0.14	14 \pm 2*
MAG-1	10.0 \pm 0.25	7.28 \pm 0.27	4.23 \pm 0.16	0.847 \pm 0.050	6.45 \pm 0.17	28.9 \pm 0.38	24 \pm 3*
LKSD-4	43.9 \pm 0.67	32.6 \pm 0.64	12.4 \pm 0.39	0.436 \pm 0.029	3.58 \pm 0.11	92.9 \pm 0.84	91 \pm 6*
TILL-2	4.03 \pm 0.04	8.88 \pm 0.02	8.38 \pm 0.06	1.64 \pm 0.02	9.54 \pm 0.19	32.5 \pm 0.15	31 \pm 3

* Recommended value.

† See Table 4 for relevant references.

Table 19 Results for Ti (mean \pm s in mg kg⁻¹): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	<0.5	0.64 \pm 0.05	16.4 \pm 2.2	186 \pm 1.9	3329 \pm 52	3533 \pm 52	3420 \pm 240*
SRM 2710	<0.5	3.44 \pm 0.04	35.5 \pm 0.5	525 \pm 4.3	2321 \pm 75	2885 \pm 78	2830 \pm 100*
SRM 2711	<0.5	0.78 \pm 0.23	15.1 \pm 0.2	182 \pm 3	2748 \pm 48	2946 \pm 46	3060 \pm 230*
SO-1	<0.5	7.06 \pm 0.51	165 \pm 2	2533 \pm 71	2870 \pm 145	5577 \pm 196	5211 \pm 200*
SO-2	8.05 \pm 0.09	8.59 \pm 0.13	124 \pm 0.7	116 \pm 4.7	8661 \pm 395	8919 \pm 399	8565 \pm 500*
SO-3	1.45 \pm 2.05	<0.5	43.3 \pm 1.5	82.3 \pm 3.3	1686 \pm 52	1813 \pm 59	1976 \pm 200*
SO-4	<0.5	<0.5	8.07 \pm 0.14	79.6 \pm 1.1	2767 \pm 3.3	2854 \pm 4	3474 \pm 240*
MAG-1	<0.5	2.30 \pm 0.10	41.2 \pm 2.1	353 \pm 2.0	4178 \pm 182	4576 \pm 185	4498 \pm 400*
LKSD-4	1.70 \pm 0.19	1.19 \pm 0.19	45.8 \pm 0.9	391 \pm 8	1476 \pm 41	1916 \pm 33	2156 \pm 470*
TILL-2	2.67 \pm 0.11	13.4 \pm 0.1	217 \pm 6	616 \pm 13.0	4088 \pm 247	4938 \pm 247	5300 \pm 190

* Recommended value.

† See Table 4 for relevant references.

chelates) is in conflict with the soil science literature.²² Besides occurring in a chelated form in organic-rich upper horizon soils, Fe occurs largely as oxides and hydroxides (e.g., as goethite, FeO₂H; lepidocrocite, FeO₂H; ferrihydrite, Fe₂O₃.nH₂O; hematite, Fe₂O₃; and maghemite, Fe₂O₃). It is likely that much of this Fe is reporting to the final fifth step (residual) under the conditions employed by Li *et al.* This was

found to be the case in a study by Kheboian and Bauer²³ who examined the procedure of Tessier *et al.* and found, for example, goethite to be little dissolved until the final step. The present scheme generally extracts a greater percentage of element reporting to the organic-sulfide phase than does the phase (4) extraction in the work of Li *et al.*, reflecting the stronger oxidizing action of the KClO₃-HCl-HNO₃ attack. In fact,

Table 20 Results for Tl (mean \pm s in $\mu\text{g kg}^{-1}$): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	7 \pm 1	65 \pm 3	119 \pm 12	82 \pm 7	407 \pm 3	685 \pm 24	740 \pm 50*
SRM 2710	146 \pm 6	117 \pm 10	238 \pm 5	159 \pm 11	615 \pm 18	1275 \pm 28	1300
SRM 2711	177 \pm 14	368 \pm 8	651 \pm 41	213 \pm 13	883 \pm 38	2292 \pm 16	2470 \pm 150*
SO-1	< 5	25 \pm 8	141 \pm 17	181 \pm 26	255 \pm 11	606 \pm 20	(640)‡
SO-2	13 \pm 2	41 \pm 20	< 10	< 10	406 \pm 15	475 \pm 36	(580)
SO-3	5 \pm 2	21 \pm 12	37 \pm 18	14 \pm 5	152 \pm 2	229 \pm 14	(180)
SO-4	< 5	20 \pm 1	109 \pm 8	26 \pm 1	310 \pm 4	468 \pm 6	(260)
MAG-1	12 \pm 1	17 \pm 3	124 \pm 9	49 \pm 4	532 \pm 7	735 \pm 13	(590)
LKSD-4	174 \pm 7	142 \pm 10	56 \pm 9	37 \pm 4	174 \pm 9	583 \pm 15	
TILL-2	21 \pm 2	49 \pm 6	116 \pm 6	79 \pm 7	646 \pm 26	910 \pm 11	

* Recommended value.

† See Table 4 for relevant references.

‡ Values in parentheses are proposed or for information.

Table 21 Results for U (mean \pm s in $\mu\text{g kg}^{-1}$): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	428 \pm 36	97 \pm 12	508 \pm 13	239 \pm 2	1594 \pm 91	2866 \pm 150	3000
SRM 2710	10800 \pm 399	1898 \pm 79	5701 \pm 101	2511 \pm 83	2840 \pm 25	23749 \pm 396	25000
SRM 2711	134 \pm 3	48 \pm 3	336 \pm 9	323 \pm 35	1682 \pm 116	2523 \pm 84	2600
SO-1	359 \pm 27	175 \pm 11	330 \pm 18	222 \pm 10	492 \pm 16	1579 \pm 52	1710 \pm 40*
SO-2	90 \pm 16	57 \pm 1	184 \pm 8	43 \pm 12	301 \pm 16	675 \pm 19	980 \pm 50*
SO-3	129 \pm 15	42 \pm 2	129 \pm 5	52 \pm 5	597 \pm 14	949 \pm 31	1110 \pm 20*
SO-4	123 \pm 21	24 \pm 2	140 \pm 13	335 \pm 19	1232 \pm 22	1853 \pm 51	2380 \pm 70*
MAG-1	543 \pm 27	65 \pm 6	484 \pm 20	292 \pm 33	1316 \pm 7	2700 \pm 25	2700 \pm 300*
LKSD-4	19650 \pm 179	448 \pm 22	4719 \pm 77	5162 \pm 77	590 \pm 17	30569 \pm 153	31000 \pm 1800*
TILL-2	602 \pm 35	215 \pm 21	1088 \pm 26	589 \pm 34	2232 \pm 28	4726 \pm 50	5700 \pm 400

* Recommended value.

† See Table 4 for relevant references.

Table 22 Results for V (mean \pm s in mg kg^{-1}): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	< 0.5	15.5 \pm 0.29	25.9 \pm 0.41	8.12 \pm 0.15	55.5 \pm 2.04	105 \pm 1.9	112 \pm 5*
SRM 2710	< 0.5	18.3 \pm 1.3	12.4 \pm 0.14	7.80 \pm 0.22	27.9 \pm 1.43	66.5 \pm 2.6	76.6 \pm 2.3*
SRM 2711	< 0.5	6.90 \pm 0.41	14.5 \pm 0.37	6.46 \pm 0.05	40.1 \pm 1.4	67.9 \pm 1.4	81.6 \pm 2.9*
SO-1	< 0.5	24.2 \pm 1.2	39.9 \pm 1.4	21.0 \pm 0.7	29.2 \pm 2.0	114 \pm 3.0	133 \pm 4*
SO-2	< 0.5	5.39 \pm 0.36	14.1 \pm 0.31	2.47 \pm 0.26	7.23 \pm 1.35	29.2 \pm 2.1	57 \pm 4*
SO-3	< 0.5	1.80 \pm 0.08	6.64 \pm 0.25	1.35 \pm 0.09	15.1 \pm 0.43	24.8 \pm 0.8	36 \pm 4*
SO-4	< 0.5	5.58 \pm 0.02	12.5 \pm 0.10	3.89 \pm 0.03	46.9 \pm 1.34	68.9 \pm 1.4	85 \pm 5*
MAG-1	0.72 \pm 0.15	18.5 \pm 0.86	25.7 \pm 1.62	15.8 \pm 0.49	60.5 \pm 2.8	121 \pm 3.2	140 \pm 6*
LKSD-4	1.07 \pm 0.13	6.65 \pm 0.19	14.8 \pm 0.27	3.17 \pm 0.07	14.4 \pm 0.20	40.2 \pm 0.28	49 \pm 8*
TILL-2	< 0.5	4.94 \pm 0.29	19.9 \pm 0.21	6.53 \pm 0.16	33.8 \pm 3.0	65.3 \pm 3.2	77 \pm 10

* Recommended value.

† See Table 4 for relevant references.

Table 23 Results for Zn (mean \pm s in mg kg^{-1}): application of sequential leach procedure to CRMs in triplicate

CRM	AEC	Am Fe ox	Cry Fe ox	Organic-sulfide	Silicate	Sum	Literature value†
SRM 2709	3 \pm 0	18 \pm 1	56 \pm 1	14 \pm 1	15 \pm 1	107 \pm 2	106 \pm 3*
SRM 2710	1481 \pm 5	1743 \pm 26	1467 \pm 17	1043 \pm 16	556 \pm 3	6291 \pm 23	6952 \pm 91*
SRM 2711	45 \pm 1	99 \pm 1	88 \pm 1	58 \pm 1	32 \pm 1	322 \pm 3	350.4 \pm 4.8*
SO-1	1 \pm 0	20 \pm 1	54 \pm 1	43 \pm 1	17 \pm 0	135 \pm 1	144 \pm 8*
SO-2	5 \pm 0	5 \pm 0	35 \pm 1	5 \pm 0	58 \pm 2	107 \pm 3	115 \pm 6*
SO-3	8 \pm 1	4 \pm 0	26 \pm 1	3 \pm 0	6 \pm 0	48 \pm 1	48.3 \pm 1.8*
SO-4	2 \pm 0	14 \pm 0	44 \pm 0	10 \pm 0	18 \pm 1	89 \pm 2	94 \pm 4*
MAG-1	3 \pm 0	28 \pm 1	53 \pm 2	24 \pm 1	18 \pm 1	126 \pm 1	130 \pm 6*
LKSD-4	68 \pm 1	50 \pm 1	40 \pm 1	14 \pm 0	11 \pm 1	183 \pm 2	194 \pm 19*
TILL-2	3 \pm 0	12 \pm 1	66 \pm 1	22 \pm 0	15 \pm 2	118 \pm 1	130 \pm 8

* Recommended value.

† See Table 4 for relevant references.

elements bound in humic and fulvic forms will dissolve to a considerable degree in both the am Fe ox and iron-manganese oxide leaches of both methods.² Note also in Fig. 2, the contrasting distribution in P in SO-1 evident in the two methods; this behaviour is repeated in the other four soils common to both studies. Crystalline forms of phosphate minerals rarely occur in soils but many varieties of metastable

and metamorphous phosphates are abundant and should be dissolved prior to the last mixed acid attack.²² Li *et al.* dried their test suite of samples at 105 °C prior to application of the sequential extraction, an action which could easily lead to redistribution of elements to more crystalline forms and which nullifies the purpose of selective leaching.¹¹ Further investigation is needed to clarify whether drying at such a high

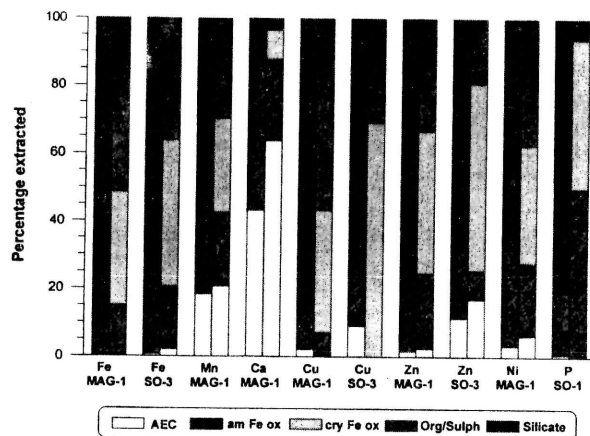


Fig. 2 Bar charts showing the comparison of results using the present method and that of Li *et al.*²⁰ The first bar of each pair represents the results of Li *et al.* and the second represents the present work

temperature could sufficiently explain the differences found in these two studies. However, previous studies have shown that, although drying oxic samples at elevated temperatures (50–100 °C) does have a significant redistribution effect on element associations, it is unlikely to explain differences of this magnitude under discussion (Fig. 2).^{11,24}

The comparison of results shown in the present paper suggests that further research (mineralogical and chemical) is needed to improve the understanding of the capabilities and limitations of these leaches. The final goal of such work is to provide an arsenal of thoroughly examined selective leaches some or all of which would be used in a particular sequence to quantify the form(s) of an element for the objectives at hand.

CONCLUSIONS

Excellent precision, mostly in the range 2–10% RSD at levels a decade higher than detection limits, is achievable by this sequential extraction scheme. Somewhat inferior precision would be expected for samples other than CRMs which would probably not undergo such rigorous blending and homogenizing protocols during preparation. Determination of elements such as Co, Cu, Ni and V would benefit from the use of a more sensitive technique such as ICP-MS rather than ICP-AES, but matrix effects would require careful evaluation. Further research is needed to facilitate the comparison of results obtained by different selective extraction schemes, and in so doing, geochemists and analysts should strive to be more, rather than less definitive, in the phases described and

'specifically' extracted. Detailed mineralogical studies are required together with chemical analysis, to assess the true degree of specificity of each step and to obviate the inherent weaknesses of testing with synthetic compounds and phases. Assignment of very broad categories to phases of a sequential scheme, in order to standardize protocols for comparison purposes, defeats the purpose of applying selective leaches and indeed, can lead to misinterpretation.

REFERENCES

- Hall, G. E. M., Vaive, J. E., and MacLaurin, A. I., *J. Geochem. Explor.*, 1996, **50**, issue 1.
- Hall, G. E. M., Vaive, J. E., Beer, R., and Hoashi, M., *Geol. Surv. Can. Bull.* 426, 1996, p. 169.
- Sondag, F., *J. Geochem. Explor.*, 1981, **15**, 645.
- Chao, T. T., *J. Geochem. Explor.*, 1984, **20**, 101.
- Cardoso Fonseca, E., and Martin, H., *J. Geochem. Explor.*, 1986, **26**, 231.
- Tessier, A., Campbell, P. G. C., and Bisson, M., *Anal. Chem.*, 1979, **51**, 844.
- Chao, T. T., and Theobald, P. K., *Econ. Geol.*, 1976, **71**, 1560.
- Chao, T. T., and Zhou, L., *J. Soil Sci. Soc. Am. Proc.*, 1983, **47**, 225.
- Chester, R., and Hughes, M. J., *Chem. Geol.*, 1967, **2**, 249.
- Chao, T. T., and Sanzalone, R. F., *J. Res. U.S. Geol. Surv.*, 1977, **5**, 409.
- Kersten, M., and Forstner, U., in *Trace Element Speciation: Analytical Methods and Problems*, ed. Batley, G., CRC Press, Boca Raton, 1989, p. 245.
- Quevauviller, P., Rauret, G., Muntau, H., Ure, A. M., Rubio, R., López-Sánchez, J. F., Fiedler, H. D., and Griepink, B., *Fresenius' J. Anal. Chem.*, 1994, **349**, 808.
- Fiedler, H. D., López-Sánchez, J. F., Rubio, R., Rauret, G., Quevauviller, P., Ure, A. M., and Muntau, H., *Analyst*, 1994, **119**, 1109.
- Govindaraju, K., *Geostand. Newsl.*, 1994, **18**, 158.
- Gladney, E. S., and Roelandts, I., *Geostand. Newsl.*, 1989, **13**, 217.
- Gladney, E. S., and Roelandts, I., *Geostand. Newsl.*, 1988, **12**, 253.
- Lynch, J. J., *Geostand. Newsl.*, 1990, **14**, 153.
- Lynch, J. J., personal communication.
- Kane, J. S., Wilson, S. A., Lipinski, J., and Butler, L., *Am. Environ. Lab.*, 1993, **6**, 14.
- Li, X., Coles, B., Ramsey, M. H., and Thornton, I., *Chem. Geol.*, 1995, **124**, 109.
- Tessier, A., Rapin, F., and Carignan, R., *Geochim. Cosmochim. Acta*, 1984, **49**, 183.
- Kabata-Pendias, A., and Pendias, H., *Trace Elements in Soils and Plants*, CRC Press, Boca Raton, 1985.
- Kheboian, C., and Bauer, C. F., *Anal. Chem.*, 1987, **59**, 1417.
- Thomson, E. A., Luoma, S. N., Cain, D. J., and Johansson, C., *Water, Air Soil Pollut.*, 1980, **14**, 215.

Paper 6/01817C

Received March 14, 1996

Accepted May 7, 1996

COMPARISON OF TWO REAGENTS, SODIUM PYROPHOSPHATE AND SODIUM HYDROXIDE, IN THE EXTRACTION OF LABILE METAL ORGANIC COMPLEXES

G.E.M. HALL and P. PELCHAT

Geological Survey of Canada, 601 Booth St., Ottawa, ON, Canada, K1A 0E8

Abstract. The international reference lake sediment, LKSD-4, was used to compare Hg, organic C and Zn extracted from its 'soluble organic' phase by two commonly used reagents: 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ solution at pH 10 and 0.5 M NaOH solution at pH 12. While recoveries of Hg and Zn by 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ are not affected by changes in sample weight to reagent volume ratio (W/V) or contact time, those by NaOH show a marked dependency. In general, the NaOH leach extracts more organic C and Hg from LKSD-4 but less Zn. Over the range of conditions studied, the NaOH-based method extracted 4.7-9.8% C, 27-103 ng g^{-1} Hg and 19-69 $\mu\text{g g}^{-1}$ Zn from LKSD-4, compared to 2.3-2.8% C, 17-24 ng g^{-1} Hg and 64-72 $\mu\text{g g}^{-1}$ Zn by the $\text{Na}_4\text{P}_2\text{O}_7$ leach. Clearly, different groups of organic substances are being dissolved by these two reagents and therefore a comparison of data from different laboratories becomes meaningless. This paper suggests that more research is needed into the exact nature of metal-organic associations extracted by selective leaches and into associated artifacts of extraction such as readsorption phenomena.

Keywords: selective leach; organic; humic; fulvic; analysis; mercury; zinc

1. Introduction

The efficiency of sodium pyrophosphate solution in extracting metals bound to humic and fulvic complexes in humus, soil and sediment samples has been studied recently at the Geological Survey of Canada (Hall *et al.*, 1995; Hall *et al.*, 1996). This work was stimulated by interest amongst the mineral exploration community in distinguishing that portion of metal held in a relatively labile form, in the surficial environment, from that portion present in mineralogical structures such as crystalline oxides or silicates (e.g. Antropova *et al.*, 1992). The high scavenging capacity of humic and fulvic complexes is usually attributed to their carboxylic acid functional groups, with contributions from other groups such as - NH_2 (amine) and -SH (thiol). As metals can be adsorbed, complexed or chelated by these organic substances, design of a phase-specific leach is challenging. Oxidative destruction of the organic matter, by reagents such as H_2O_2 or NaOCl, is undesirable as other phases such as sulphides and Mn oxides may also be dissolved and precipitation can occur at high pH. Dissolution of organic matter by sodium pyrophosphate, $\text{Na}_4\text{P}_2\text{O}_7$, has been adopted by soil scientists (e.g. McKeague, 1968; Bascomb and Thanigasalam, 1978; Jeanroy and Guillet, 1981) and, moreover, the ratio of C in humic to C in fulvic components of the extract has been used to classify A and B horizons. The normal procedure employed by soil scientists is that described by McKeague *et al.* (1971) where 1 g of sample is stirred for 16 h in 100 ml of 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ at room temperature. Application of this procedure to 70 soil and sediment samples and the international lake sediment reference material, LKSD-4, demonstrated that the commonly used period of 16 h for the 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ leach could be shortened to 1 h without significant decrease in extraction efficiency (<5%); indeed, the shorter contact time is of benefit to elements such as Ni which are prone to readsorption (Hall *et al.*, 1996). Analyses of 28 1-g samples of LKSD-4 over a two year period

Water, Air and Soil Pollution 99: 217-223, 1997.

© 1997 Kluwer Academic Publishers. Printed in the Netherlands.

demonstrated relative standard deviations in the range 2-6% for elements such as Zn, Pb, Cu, Fe, Mn and C.

While the $\text{Na}_4\text{P}_2\text{O}_7$ leach is being adopted widely in exploration geochemistry, the NaOH reagent remains that suggested by the International Humic Substances Society (Kersten and Forstner, 1989) and is prominent in environmental studies in sediment analysis (e.g. Dmytriw *et al.*, 1995). Kersten and Forstner (1989) warn against the use of NaOH for two main reasons: it causes unacceptable dissolution of clay minerals; and metals tend to hydrolyze and readsorb onto reactive surface sites following removal of their organic coatings. This paper compares the efficacy of extraction of Hg, Zn and C bound to 'soluble' organic matter in the geological reference material (GRM), LKSD-4, using these two popular leach solutions, 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ and 0.5 M NaOH.

2. Methods

The GRM, LKSD-4 (from the Canadian Certified Reference Materials Project, CCRMP), was used to study the effects of (a) the ratio of sample weight to volume of reagent and (b) contact time in both the 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ (at pH 10) and 0.5 M NaOH (at pH 12) leaches. This GRM contains 17.7% C, 190 ng g⁻¹ total Hg and 194 µg g⁻¹ Zn (Lynch, 1990). Each test was performed in triplicate. In the first half of the study, contact times of 1 h ($\text{Na}_4\text{P}_2\text{O}_7$) and 18 h (NaOH) were used, 18 h having been recommended by Schnitzer and Skinner (1968) in the development of the NaOH procedure. Ratios of sample weight:reagent volume examined were 0.005, 0.01, 0.02, 0.04 and 0.1 g ml⁻¹, the minimum sample weight taken being 0.25 g. The NaOH leach was carried out under N₂ (to minimise auto-oxidation and hydrolysis) and constant shaking was employed for both leaches.

Contact times of 1, 2, 3, 4 and 18 h were tested, using two ratios of sample weight:reagent volume: 0.005 and 0.01 for the $\text{Na}_4\text{P}_2\text{O}_7$ procedure; and 0.04 and 0.06 for the NaOH extraction. These ratios reflect those commonly used in the literature. Each solution was centrifuged at 2800 rpm for 10-15 min for separation from the residue prior to analysis.

Each leach solution was diluted with water and, for Hg determination, the solution immediately made 4 M in HCl and 0.5% in BrCl (to maintain Hg in solution as Hg²⁺). The dilution factor was variable, the criterion being that the final solution contained less than 400 ng l⁻¹ Hg, the uppermost calibration standard. Mercury was determined in the resulting solutions by ICP-MS with NaBH₄ as reductant in-line to form Hg⁰ vapour which was swept into the central channel of the ICP torch (for details, see Hall and Pelchat, 1997). Zinc was determined by flame AAS at 213.9 nm. Organic C in solution was determined using the Shimadzu Model 5000 TOC instrument, based on combustion at 680 °C and non-dispersive infra-red detection.

3. Results and Discussion

The influence of changing the sample weight to reagent volume ratio on the extraction of Hg and organic C in LKSD-4 is illustrated in Fig. 1 for both methods. Change in this ratio, from 0.005 to 0.1, has little effect on the Hg or C concentrations extracted by $\text{Na}_4\text{P}_2\text{O}_7$, which are about 18 ng g⁻¹ and 2.5%, respectively (Fig. 1a). However, there is a marked increase in Hg (exponential?) extracted by NaOH solution when the sample weight:reagent volume ratio

decreases below 0.04, resulting in a maximum average Hg concentration of 102 ng g^{-1} as compared to a minimum of 55 ng g^{-1} (Fig. 1b). This increase is not evident in the behaviour of C which is constant at about 8.4% except for the increase to 9.8% at the minimum sample weight:volume ratio of 0.005. Clearly, a much greater component of the organic C is being extracted by the NaOH leach (8.4 vs. 2.5% C) but the lack of coherence between the Hg and C graphs for this leach suggests that much of the corresponding Hg is not associated with organics. The results for Zn are presented in Fig. 2.

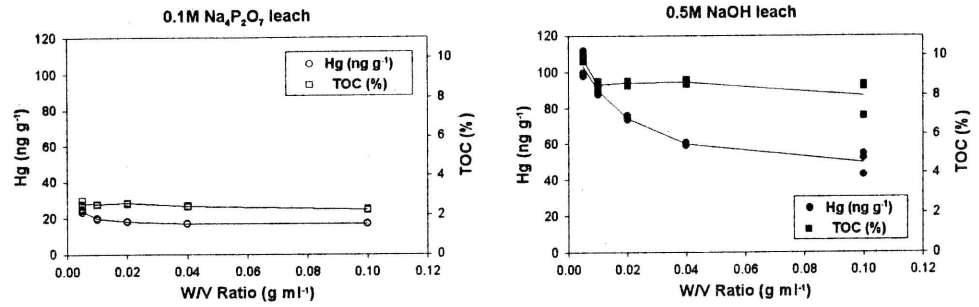


Fig. 1 Effect of sample weight to reagent volume ratio (W/V) on Hg and organic C extracted from LKSD-4 by (a) 0.1 M Na₄P₂O₇, and (b) 0.5 M NaOH solutions.

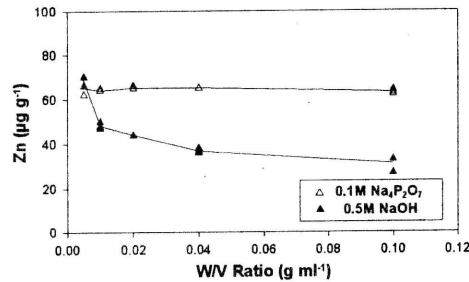


Fig. 2 Effect of sample weight to reagent volume ratio (W/V) on Zn extracted from LKSD-4 by 0.1 M Na₄P₂O₇ and 0.5 M NaOH solutions.

Note the plateau again evident for the Na₄P₂O₇ graph and a sharp increase in Zn extracted by NaOH at the minimum sample:volume ratio which coincides with the increase in C. Here we see the converse in trends: Zn in the 'labile organic' component of LKSD-4 is about $65 \mu\text{g g}^{-1}$ by the Na₄P₂O₇ extractant, whereas it ranges from a low of only $31 \mu\text{g g}^{-1}$ to $69 \mu\text{g g}^{-1}$ using NaOH. The Hg and Zn graphs suggest that more than one 'phase' is being dissolved by NaOH and that readsorption could be occurring. If 0.1 M Na₄P₂O₇ is extracting the humic and fulvic component of LKSD-4 with adequate specificity (as indicated by McKeague, 1968; McKeague *et al.*, 1971; Bascomb and Thanigasalam, 1978), then the 0.5 M NaOH

leach is over-estimating the associated labile Hg and under-estimating Zn. Clearly it is undesirable to select conditions of extraction where slight deviations cause major changes in recovery, as would be the case when operating below a ratio of 0.04 in Fig. 1b (see Dmytriw *et al.*, 1995).

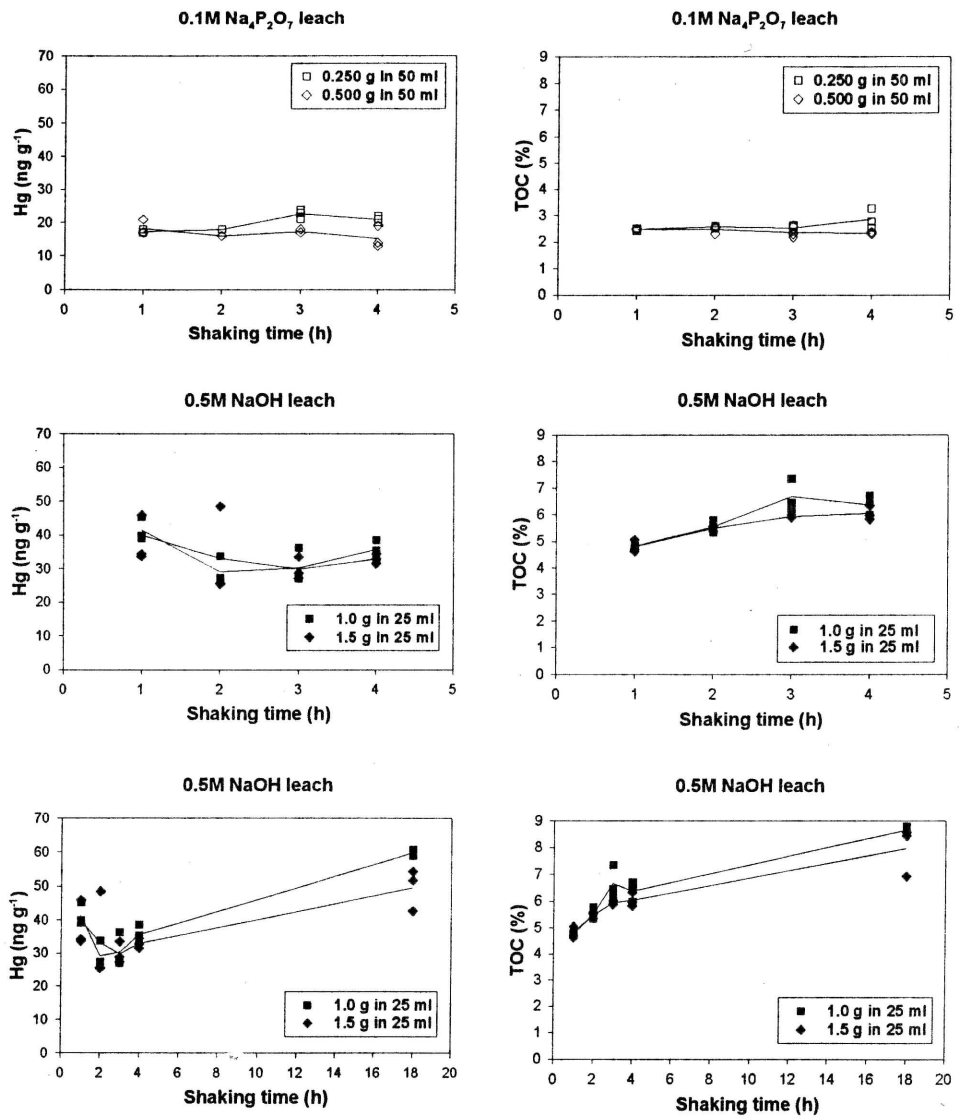


Fig. 3 Effect of contact time on Hg and organic C extracted from LKSD-4 by (a) 0.1 M Na₄P₂O₇ and (b)-(c) 0.5 M NaOH solutions.

Contact time has a slight effect on the extraction of Hg and C by 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ at the lower sample weight of 0.25 g of LKSD-4 which may be a reflection of heterogeneity and noisier measurements at the lower concentrations (Fig. 3a). Extraction of Hg and C by 0.5M NaOH differs over the 4 h period examined: Hg concentrations fall at hour 2 and 3 compared to that at hour 1 and rise again slowly whereas C concentration increases continuously with time from 1 h on (Figs. 3b, c). Triplicate analyses indicate inferior reproducibility by the NaOH leach (Fig. 3).

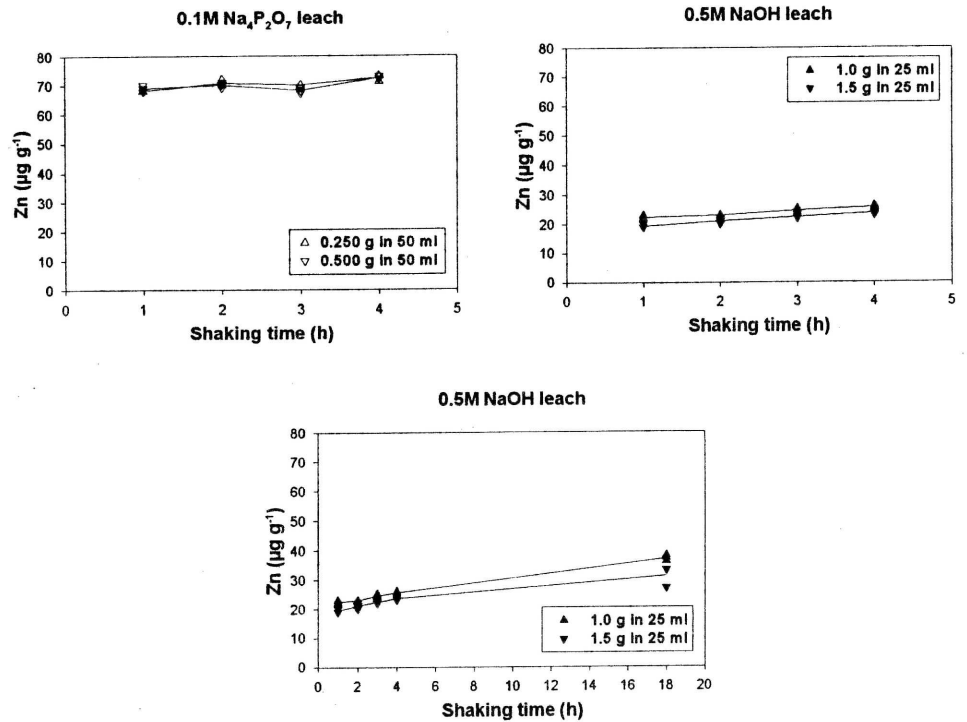


Fig. 4 Effect of contact time on Zn extracted from LKSD-4 by 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ and 0.5 M NaOH solutions.

The effect of contact time on Zn extraction by both methods is shown in Fig. 4: Zn levels are unchanged ($70 \pm 2 \mu\text{g g}^{-1}$) with time using $\text{Na}_4\text{P}_2\text{O}_7$ but increase gradually with NaOH reagent, from $24\text{--}26 \mu\text{g g}^{-1}$ at 1 h to a concentration of $30\text{--}37 \mu\text{g g}^{-1}$ at 18 h.

Relatively little is known about the extent to which the organic matter extracted by 0.5 M NaOH differs from that dissolved by 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$. In a comparison of the two reagents applied to several different soil types, Schnitzer and Schuppli (1989a) found there to be a tendency for the humic acids derived from the 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ leach to be more aromatic and of higher molecular weight but did not find the significant difference in recoveries of organic C we find in LKSD-4 (2.5 vs. 8.4% C). They recommended the 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ leach as an attractive alternative to 0.5 NaOH as the probabilities for auto-oxidation and hydrolysis are greatly diminished. A sequential extraction procedure then

developed by Schnitzer and Schuppli (1989b), to define various organic fractions in soil, placed 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$, before 0.5 M NaOH to specifically dissolve organic matter complexed to metals and clays as opposed to "free" organic matter including less decomposed material which would finally be leached with the latter reagent. In outlining knowledge gaps yet to be addressed, Schnitzer (1991) calls for future research into metal, clay and humic substance (humic acids, fulvic acids and humin) interactions. Given the complexity of these interactions (via adsorption, chelation and complexation) and the range of chemical structures involved (e.g. aliphatic-, aromatic-, phenolic-, carbohydrate-C), the classification of the 'soluble' or 'poorly soluble organic' phases liberated in commonly used 'selective' leaches is very oversimplified. It is hardly surprising, therefore, that dissimilar metal concentrations are obtained by the application of these different reagents. Further attention should be given to exactly what group(s) of metal-organic substances are of interest, to, for example, distinguish between diagenesis in a sediment core and a process taking place prior to deposition.

4. Conclusion

The 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ leach at pH 10, designed to dissolve the 'soluble organic' phase of a soil or sediment, shows minimal change in the amount of organic C, Hg or Zn leached from LKSD-4 when parameters of sample weight to reagent volume (W/V) and contact time are altered. This is in contrast to the 0.5 M NaOH leach at pH 12, where there appears to be an exponential increase in Hg (and Zn) extracted with decrease in W/V which does not correspond to the behaviour of organic C. Contact time has a less dramatic effect on recoveries by NaOH which are seen to increase generally with time for all three elements, though Hg does show a slight decrease initially after 1 h. Thus, the ratio of W/V selected in the NaOH procedure will have a significant effect on the results. Over the range of conditions studied, the NaOH-based method extracted 4.7-9.8% C and 27-103 ng g^{-1} Hg from LKSD-4, compared to 2.3-2.8% C and 17-24 ng g^{-1} Hg by the $\text{Na}_4\text{P}_2\text{O}_7$ leach. Unlike Hg, extraction of Zn by the $\text{Na}_4\text{P}_2\text{O}_7$ leach was consistently higher, at 64-72 $\mu\text{g g}^{-1}$ over this range, compared to 19-69 $\mu\text{g g}^{-1}$ by NaOH. Clearly the two reagents are extracting different groups of organic substances and results for both cannot be equated to the same nominal phase.

References

- Antropova, L.V., Goldberg, I.S., Voroshilov, N.A., and Ryss, Ju.S.: 1992, *J. Geochem. Explor.* **43**, 157-166.
- Bascomb, C.L. and Thanigasalam, K.: 1978, *J. Soil Sci.* **29**, 382-387.
- Dmytriw, R., Mucci, A., Lucotte, M., and Pichet, P.: 1995, *Water Air Soil Pollut.* **80**, 1099-1103.
- Hall, G.E.M., MacLaurin, A.I. and Vaive, J.E.: 1995, *J. Geochem. Explor.* **54**, 27-38.
- Hall, G.E.M., Vaive, J.E., and MacLaurin, A.I.: 1996, *J. Geochem. Explor.* **56**, 23-36.
- Hall, G.E.M. and Pelchat, J.C.: 1997, *J. Anal. At. Spectrom.* **12**, page info coming (Jan issue)

- Jeanroy, E. and Guillet, B.: 1981, *Geoderma* **26**, 95-105.
- Kersten, M. and Forstner, U.: 1989, *Trace Element Speciation: Analytical Methods and Problems*, G. Batley [ed], CRC Press, 245-317.
- Lynch, J.J.: 1990, *Geostand. Newsl.* **14**, 153-167.
- McKeague, J.A.: 1968, *Can. J. Soil Sci.* **48**, 27-35.
- McKeague, J.A., Brydon, J.E., and Miles, N.M.: 1971, *Soil Sci. Soc. Amer. Proc.* **35**, 33-38.
- Schnitzer, M.: 1991, *Soil Sci.* **151**, 41-58.
- Schnitzer, M. and Schuppli, P.: 1989a, *Can. J. Soil Sci.* **69**, 253-262.
- Schnitzer, M. and Schuppli, P.: 1989b, *Soil Sci. Soc. Am. J.* **53**, 1418-1424.
- Schnitzer, M. and Skinner, S.I.M.: 1968, *Soil Sci.* **105**, 392-396.



ELSEVIER

Journal of Geochemical Exploration 64 (1998) 153–159

JOURNAL OF
GEOCHEMICAL
EXPLORATION

Assessment of the 1 M NH₄NO₃ extraction protocol to identify mobile forms of Cd in soils

Gwendy E.M. Hall *, Alice I. MacLaurin, Robert G. Garrett

Geological Survey of Canada, 601 Booth St., Ottawa, ON K1A 0E8, Canada

Accepted 29 May 1998

Abstract

Extraction of soils by leaching 20 g in 50 ml of unbuffered 1 M NH₄NO₃ for 2 h has become the standard German protocol (DIN 19730) to estimate mobile and potentially hazardous forms of trace elements. This protocol was examined using soil controls of chernozem and podzol character collected in the Canadian Prairies and Ontario. It was found that this procedure was not robust with respect to change in sample weight per unit volume of reagent or to contact time. A 3- to 15-fold increase in Cd extracted was produced by decreasing sample weight from 10 g to 1 g in 50 ml of reagent. This change in extractable-Cd was more pronounced with increasing pH of the soil, ranging from 5.2 to 8.1 amongst the control samples. Leach period was less significant in determining results but longer time (1–3 h) generally produced lower extractable-Cd, suggesting readsorption. Lack of stability of Cd in this reagent was further demonstrated by spiking experiments where Cd was added at the beginning of the leach. Recoveries of Cd at 50 and 200 ppb were below 20% for soils of pH 6.1 and 6.9. Such severe adsorption of Cd was not encountered with another unbuffered reagent, 1 M NH₄Cl, operating at a similar initial pH of 5. Cadmium levels extracted from soils by NH₄Cl and 0.1 M Na₄P₂O₇ were comparable and could be used to predict uptake in durum wheat on the Canadian Prairies, whereas data by the 1 M NH₄NO₃ leach were generally near the detection limit of 0.1 ppb (ng g⁻¹) Cd. Readsorption of Cd and lack of equilibrium in the 1 M NH₄NO₃ extraction could lead to underestimation of plant-available Cd in neutral and alkaline soils. © 1998 Elsevier Science B.V. All rights reserved.

Keywords: ammonium nitrate; extraction; soil; cadmium; DIN 19730

1. Introduction

There is global concern for the negative effects on human health and ecosystems of excessive amounts of heavy metals such as Cd (Chaney, 1997). The search for sound protocols designed to predict 'bioavailable' forms of toxic metals such as Cd in soils is evident in the focus of recent international

meetings such as the 'Cadmium Workshop' (Sources of Cadmium in the Environment) held in Sweden in 1996 and hosted by member countries of the Organisation for Economic and Cooperative Development (OECD).

A procedure to determine mobile concentrations of trace elements (viz. Ag, As, Bi, Cd, Co, Cr, Cu, Hg, Mn, Mo, Ni, Pb, Sb, Tl, U, V and Zn) in soils was adopted in 1995 in Germany, to be used for risk assessment, for limiting agricultural use and as a tool to identify soils with high amounts of leach-

* Corresponding author. Tel.: +1 613 992 6425; Fax: +1 613 996 3726; E-mail: hall@gsc.nrcan.gc

ical Exploration
application of geo-
n and study of
lated fields, in-
of the environ-
description and
proved methods
of sampling and
methods of in-
distributions in
vironments; and
dispersion in
and the atmo-

side back cover)

ISTS

an specializing in
chemistry whose
geochemistry as
scientific interests of
and distribution
information
development
a profession
inars and techni-

is \$70.00 which
tion and a quar-
rent happenings
ry. Members are
ee or at reduced
These include the
nsored symposia
phy volumes and

membership in the As-
sed from the Jour-
ress given below.
ges of address or
very of newsletter
bers only) should
permanent office:

on Geochemists,
ness Manager,

Canada.
613-828-9288,
et
home.html

able elements (DIN 19730, 1995; Prüß, 1998). This protocol, known as 'DIN 19730', is based on extraction of 20 g of air-dried soil in 50 ml of 1 M NH_4NO_3 for 2 h at room temperature. Application of this leach in Germany has been used to derive background, action and threshold values for mobile trace elements in soils (Prüß, 1992). For example, the 'action value' for NH_4NO_3 -extractable Cd is set at 20 ppb (ng g^{-1}), a soil concentration below which critical element concentrations in plants should not be exceeded in 95% of the cases. The corresponding threshold value for limiting agricultural use is 40 ppb NH_4NO_3 -extractable Cd for food plants (e.g. broccoli, wheat, spinach). Adoption of this protocol by other countries, such as those within the European Community or even internationally, has been proposed (Anderson et al., 1994).

This procedure (DIN 19730) is based on work by Symeonides and McRae (1977) in their assessment of plant-available Cd in soils. They compared the extraction efficiencies of seven reagents (e.g. NH_4OAc , AcOH , EDTA) used to recover Cd which had been added to 25 samples of various surface soils collected in Kent, England. Results were then plotted against the Cd found in dry radish tops grown in these soils and soil extraction by 1 M NH_4NO_3 showed the best correlation, with a coefficient of 0.97. The pH of the soils ranged from 4.9 to 8.0; Cd was added at unnaturally high levels, as CdCl_2 , equivalent to 50 and 100 ppm in the dried soil. Ammonium acetate, buffered at pH 7, showed the next best correlation coefficient, at 0.50, with Cd extracted in the range 8–78 ppm (cf. 0.6–66 ppm in 1 M NH_4NO_3). Symeonides and McRae (1977) argue that the best correlation with crop response would be expected with an unbuffered reagent such as 1 M NH_4NO_3 so that extraction takes place near the pH of the soil encountered by the root system. The only significant difference found by altering conditions of soil weight:extractant volume and equilibration time was that less Cd was extracted by longer shaking (e.g. 18 h) which suggested reabsorption. They recommended a 1-h equilibration, with agitation, of a 10-g sample in 100 ml of 1 M NH_4NO_3 .

Later work by Stuanes et al. (1984) advocated the use of 1 M NH_4NO_3 to provide data on exchangeable elements, exchangeable acidity, exchangeable Al, cation exchange capacity and base saturation of the

soil. They found results by this reagent to be identical to those produced using 1 M KCl and 1 M NH_4Cl for the purpose of evaluation of soil status. Furthermore, there were no differences in the amounts of Na, K, Mg and Ca extracted by 1 M NH_4NO_3 and NH_4OAc at pH 7 from the various acidic soils investigated. Ammonium nitrate was preferred over the Cl-based reagents as the latter posed problems in the analytical techniques employed. In their development of a sensitive ICP-MS-based method to determine As and Se in soils, Anderson et al. (1994) analysed three standard reference samples (soil GXR-5, sediment MESS-1 and coal fly ash NIST 1633a) for both total and NH_4NO_3 -extractable As and Se. Although total concentrations were as high as 132 ppm in As and 10.6 ppm in Se in NIST 1633a, extractable-As and Se were found to be below the detection limits of 5 and 10 ppb, respectively, in all three samples.

Garrett and colleagues (Garrett et al., 1998; R.G. Garrett, pers. commun., 1997) have studied different extractants applied to soils collected in the Canadian Prairies (Garrett, 1994) in an attempt to estimate that amount of Cd which would be phyto-available to various cultivars of durum wheat. The reagents tested comprise: 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ (McKeague, 1968; Hall et al., 1996); 0.005 M DTPA (Lindsay and Norvell, 1978); 1 M NH_4Cl (Krishnamurti et al., 1995); and 1 M NH_4NO_3 . It was during this study that problems with the NH_4NO_3 extraction became apparent; this paper documents those limitations.

2. Experimental

Six soil control reference materials (CRMs) were prepared: three (CR-Ap, MO-1 and MO-7) were collected on the Canadian Prairies and another three (HIG-1, FOR-1 and ROS-1) in Ontario (Table 1). These bulk samples were air-dried, coarse material removed by hand and finally they were screened to pass a 2-mm sieve. With the exception of a small split which was ball-milled for total metal determination (by $\text{HF-HClO}_4\text{-HNO}_3$), they were used 'as is' for the extraction experiments.

All reagents used in this project were Baker (Phillipsburg, NJ, USA) 'analysed reagent' grade. Standard solutions employed for calibration in the measurement techniques were purchased from High

Table 1

Description of soil CRMs used in the study; all had been air-dried and screened to pass a 2-mm sieve

Soil CRM	Description	pH ^a	Total Cd (ppb)
CR-Ap	Ploughed horizon, dark brown chernozem	6.4	322 ± 8 (n = 3)
MO-1	Ploughed horizon, black chernozem	6.4	1600
MO-7	C-horizon, black chernozem	8.1	2400
HIG-1	Ploughed horizon, melanic brunisol	6.9	428 ± 5 (n = 3)
FOR-1	A-horizon forest, humo-ferric podsol	5.2	198 ± 7 (n = 3)
ROS-1	Ploughed horizon, melanic brunisol	6.1	199 ± 8 (n = 3)

^a Measured in 0.01 M CaCl₂ according to Peech, 1995.

Purity Standards (Charleston, SC, USA). Distilled deionized water was used throughout. Ultrex nitric acid, at 1%, was used to dilute leachates prior to analysis by ICP-MS.

Initial results showed that the reagent, 1 M NH₄NO₃, contained high concentrations of the trace elements of interest and therefore required cleaning. This procedure comprised passing the reagent through a column of Chelex-100 resin (100–200 mesh) in the NH₄ state. If necessary, the pH of the reagent was then adjusted to 4.7 (that before contact with Chelex resin) and this solution was used throughout the study.

The ICP-MS analysis was carried out using the VG PlasmaQuad II+ (Winsford, Cheshire, UK). In addition to Cd, measured at *m/z* 114 and 118, analysis was also carried out at *m/z*: 63 for Cu; 57 for Fe; 55 for Mn; 208 for Pb; and 66 for Zn. Corrections were made for spectral interferences of Sn and MoO on ¹¹⁴Cd by monitoring ¹¹⁸Sn and ¹⁹⁸Mo. All analyte solutions were diluted at least 10-fold in 1% HNO₃ just prior to nebulisation ICP-MS. Calibration solutions were run after every eight samples; internal standards were not employed. Periodically, measurement by standard additions was carried out to confirm the absence of non-spectral matrix interferences.

The effects of changing leach time and sample weight: reagent volume from those stipulated in the DIN 19730 procedure were investigated using the six soil CRMs. All tests were carried out in triplicate for each CRM. The basic procedure is as follows.

(1) Weigh 20 g of <2 mm dried sample into a 250-ml high-density polyethylene bottle. Add 50 ml of 1 M NH₄NO₃ and cap. Place on a horizontal reciprocating shaker at 180 cycles min⁻¹ for 2 h. [These ratios and times were changed to evaluate their effects.]

(2) Pour into centrifuge tube and spin at 2800 rpm for 10 min.

(3) Decant and filter through 0.45-μm Millipore filter paper (type HAWP) under vacuum.

(4) Dilute filtrate 10-fold with 1% HNO₃ prior to analysis by ICP-MS (overall dilution factor 25).

The detection limit for Cd under these experimental conditions was 0.1 ppb in the original sample.

The three Ontario CRMs were used to measure the recovery of Cd added at equivalent concentrations of 5, 50 and 200 ppb (ng g⁻¹) at the beginning of the DIN 1 M NH₄NO₃ procedure. A set of spiked blank solutions was also carried through the procedure to test for any Cd lost to the walls of the vessels. This experiment was repeated for two other extractions: 0.1 M Na₄P₂O₇, as described by Hall et al. (1996); and 1 M NH₄Cl, as described by Krishnamurti et al. (1995). Cadmium was added as CdCl₂ in solution for the 1 M NH₄Cl leach, whereas the standard stock solution in 2% HNO₃ was used for spiking in the other two leaches.

3. Results and discussion

Initial indication of readsorption occurring in the NH₄NO₃ leach was given by comparison of blank reagent values (prior to cleaning with Chelex-100) for Cd, Cu, Fe, Mn, Pb and Zn with element concentrations in the leachates of the suite of CRMs. For example, the data presented in Table 2 show that, although the reagent blank (1 M NH₄NO₃) contains 9 μg l⁻¹ Pb, levels of Pb found in the leachates of the CRMs are much lower, in the range 0.2 to 2 μg l⁻¹. Similarly, the blank concentration of Fe (6.4 μg l⁻¹) is higher than that in any of the CRMs (<4 μg l⁻¹). Hence, contact of the NH₄NO₃ reagent with the soils

Table 2
Element concentrations (in $\mu\text{g l}^{-1}$) in 1 M NH_4NO_3 leachates of soil CRMs (5 g/50 ml)

Medium	Cd	Cu	Fe	Mn	Pb	Zn
1 M NH_4NO_3 ^a	0.21 ± 0.01	3.0 ± 0.2	6.4 ± 0.2	15.0 ± 0.4	9.0 ± 0.5	5.7 ± 0.1
CRMs	0.29-0.55	0.5-4.9	<1-4.0	1-650	0.2-2.0	3.3-15

^a Six processed blanks.

is effectively cleaning it for these elements! The concentration of Cd in the CRMs is just above that of the blank reagent. All further work carried out with NH_4NO_3 , which had been cleaned by passing the solution through a column of Chelex-100, showed blank analyte concentrations below detection limits.

Precision was acceptable throughout, with RSDs of triplicate analyses averaging 10% except at levels of Cd extracted below 1 ppb where analytical variability was dominant, and at sample weights of 1 g where sampling variability was dominant. Fig. 1 shows the effect of leaching time on the extraction of Cd from 5 and 10 g weights of the three Prairie CRMs. Leaching time appears to have little effect on MO-1, but the other two show varying decreases in Cd extracted over 3 h compared to 2 or 1 h. More significant is the difference in results obtained at the two sample weights taken. For example, 2.8 ± 0.3 ppb Cd is leached from 5 g of MO-7 in 1 h compared to only 0.48 ± 0.08 ppb from 10 g. The equivalent values for CR-Ap are 2.0 ± 0.2 ppb and 0.8 ± 0.1 ppb, respectively. These data could be even lower if the ratio of 20 g to 50 ml specified in DIN 19730 had been implemented. Results for 5 and 10 g of MO-1 are similar at 1 h extraction but diverge at longer leaching times, with decreases in Cd for the 10-g aliquot suggestive of readsorption. Manganese determined in these solutions of CR-Ap showed different

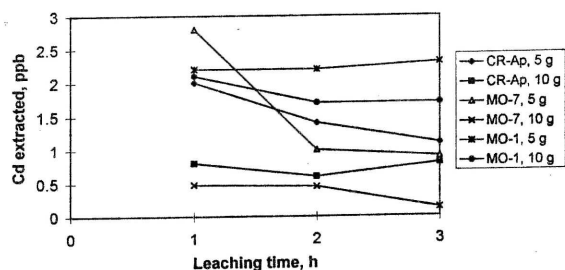


Fig. 1. Effect of contact time on Cd extracted by 50 ml of 1 M NH_4NO_3 leach of 5 and 10 g sample weights of Prairie CRMs.

behaviour to that of Cd, with consistent increases in Mn extraction with time and a greater amount extracted in the 10-g sample (Fig. 2).

In another set of experiments with the Prairie CRMs, even lower weights of 1 and 2.5 g were leached for 1 and 3 h (Fig. 3). By lowering the absolute amount of sample from 10 g to 1 g in 50 ml of NH_4NO_3 , a 3- to 15-fold increase in Cd extracted in 1 h is obtained, the greatest difference being for MO-7 (0.48 ± 0.08 to 7.3 ± 2.3 ppb) and the least for MO-1 (2.1 ± 0.2 to 7.2 ± 2.3 ppb Cd). Soil MO-1 is the most alkaline of the three (pH 8.1 compared to 6.4, Table 1). Similar patterns are evident for the 3 h data set (Figs. 1 and 3). The anomalous behaviour of MO-1 in that more Cd is leached from a 1-g sample in 3 h (9.4 ± 0.6 ppb) compared to 1 h (7.2 ± 2.3 ppb) may not be significant in view of the deviation

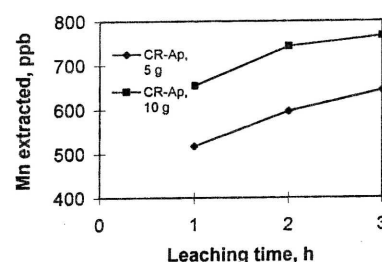


Fig. 2. Effect of contact time on Mn extracted by 50 ml of 1 M NH_4NO_3 leach of 5 and 10 g sample weights of soil CR-Ap.


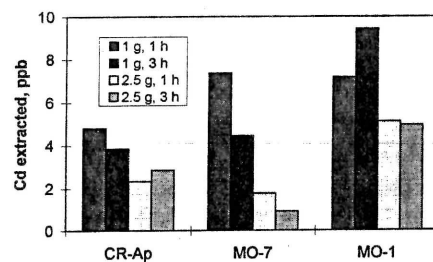


Fig. 3. Effects of contact time and sample weight in extraction of Cd by 50 ml of 1 M NH_4NO_3 leach on Prairie CRMs.


	Zn
1 ± 0.5	5.7 ± 0.5
2-2.0	3.3-15

consistent increases in water amount extracted

ments with the Prairie of 1 and 2.5 g were 3). By lowering the 10 g to 1 g in 50 ml increase in Cd extracted difference being for 2.3 ppb) and the least 2.3 ppb Cd). Soil MO-7 (pH 8.1 compared to are evident for the 3 h anomalous behaviour of Cd from a 1-g sample compared to 1 h (7.2 ± 2.3 view of the deviation



extracted by 50 ml of 1 M weights of soil CR-Ap.



sample weight in extraction of on Prairie CRMs.

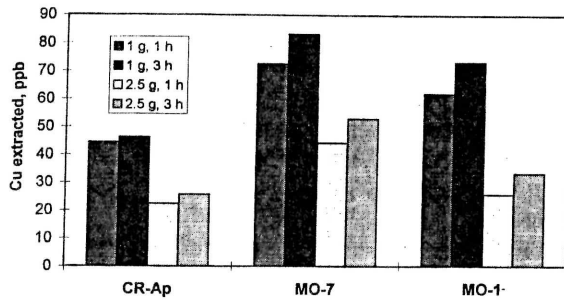


Fig. 4. Effects of contact time and sample weight in extraction of Cu by 50 ml of 1 M NH_4NO_3 leach on Prairie CRMs.

in results at the 1-g weight. Copper, measured in these solutions, shows similar behaviour to Cd in that much more is leached using the 1-g aliquot rather than 2.5 g (Fig. 4). For example, 62 ± 1 ppb Cu is extracted from 1 g of MO-1 in 1 h compared to 26 ± 1 ppb from 2.5 g. Slightly more Cu is leached from all three CRMs at greater equilibration times.

The effect of sample weight and contact time in leaching Cd from the more acidic Ontario CRMs is shown in Fig. 5. Decrease in Cd recovered with increase in sample weight taken is again evident. For example, the amount of Cd extracted by 25 ml of NH_4NO_3 in 2 h decreases from 4.0 ± 0.1 ppb Cd at 2 g of HIG-1 to 2.1 ± 0.1 ppb at 10 g (the ratio used in the DIN protocol). This sample, with the most 'total' Cd (428 ppb) and the highest pH (6.9) of the three, shows the least NH_4NO_3 -extractable Cd. Conversely, the most acidic soil (pH of 5.2), FOR-1, exhibits the greatest amount of extractable Cd. The pH of the solutions following application of the DIN protocol were 5.8, 4.9 and 4.0 for HIG-1, ROS-1 and FOR-1, respectively. Time of leaching, at 1 or 2 h, had little influence on Cd results.

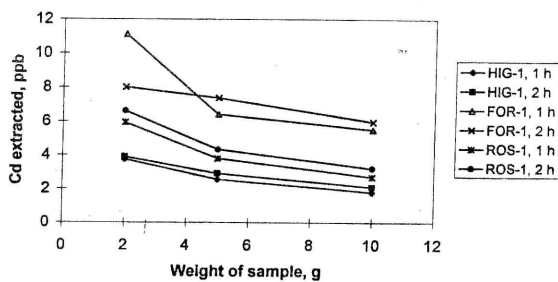


Fig. 5. Effects of contact time and sample weight in extraction of Cd by 25 ml of 1 M NH_4NO_3 leach on Ontario CRMs.

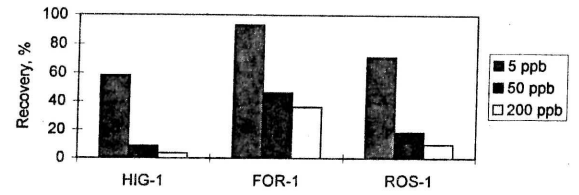


Fig. 6. Recovery of Cd added at 5, 50 and 200 ppb to Ontario CRMs leached according to DIN 19730.

The Ontario CRMs were used to study the recovery of Cd, added in nitrate form, after carrying out the 2-h leach at 10 g in 25 ml of reagent. Blank reagent solutions which had also been spiked showed complete recoveries of added Cd. The results for the CRMs, shown in Fig. 6, demonstrate similar patterns to those of Fig. 5 in that recoveries of Cd are highest for the most acidic soil, FOR-1. The degree of adsorption of Cd added at levels equivalent to 50 and 200 ppb in the soil is high, at values greater than 80% in ROS-1 (soil pH of 6.1) and HIG-1 (pH of 6.9). Even FOR-1, with a soil pH of 5.2, shows adsorption of greater than 50% at these Cd levels. Measurement of Pb in these solutions, spiked at the same concentrations as Cd, indicated 0% recovery throughout. In contrast, a similar experiment, carried out in 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ at 2.5 g of sample in 50 ml for 1 h, exhibited full recoveries for all spike additions of Cd. Results of the same experiment carried out for the 1 M NH_4Cl leach (16 h, 5 g of sample in 30 ml) showed reasonable recoveries of about 80% or more at the 5 ppb spike level (Fig. 7). Table 3 compares the amounts of Cd extracted by these three leaches.

The much lower extraction efficiency of NH_4NO_3 compared to that of $\text{Na}_4\text{P}_2\text{O}_7$ or NH_4Cl , shown in Table 3, is also reflected in results for about 130 Prairie soil samples (R.G. Garrett, pers. commun.,

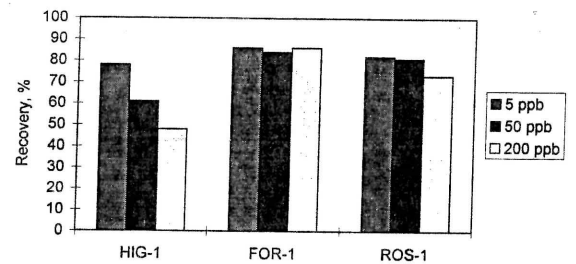


Fig. 7. Recovery of Cd added at 5, 50 and 200 ppb to Ontario CRMs leached in 1 M NH_4Cl .

Table 3
Concentrations of Cd (in ppb) leached from triplicate samples of CRMs by 1 M NH_4NO_3 , 1 M NH_4Cl and 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$

CRM	NH_4NO_3	NH_4Cl	0.1 M $\text{Na}_4\text{P}_2\text{O}_7$
HIG-1	2.1 ± 0.05	91 ± 2	136 ± 2
FOR-1	5.96 ± 0.34	25 ± 1	19 ± 1
ROS-1	3.2 ± 0.1	51 ± 2	56 ± 2

1997). Most of the values for Cd by the NH_4NO_3 extraction were below the detection limit of 0.1 ppb, consistent with those soils of pH greater than about 7.4. Results rose to several ppb when the pH of the soil decreased to the range 5.5–6.5. However, concentrations of Cd extracted in 0.1 M $\text{Na}_4\text{P}_2\text{O}_7$ ranged from 5 to 500 ppb, with levels of Cd generally slightly lower by the NH_4Cl extraction. More importantly, in a subset of 34 paired soil and wheat samples, a high degree of fit (ca. 75%) has been found between the $\text{Na}_4\text{P}_2\text{O}_7$ -extractable Cd (including the extractable organic carbon) and the Cd present in durum wheat (Garrett et al., 1998). No such modelling was afforded by the NH_4NO_3 data as most were below the detection limit. The comparison of data for seven Prairie wheat/soil sites, shown in Table 4, demonstrates the dependency of results by the NH_4NO_3 leach on the pH of the soil. Neither the Cd in the durum wheat nor that extracted from the soil by $\text{Na}_4\text{P}_2\text{O}_7$ exhibits such pH dependency. The soil, E, whose wheat contains the greatest amount of Cd in this set (204 ppb) is extremely low in NH_4NO_3 -extractable Cd (0.2 ppb). The most acidic soil in this set, A at a pH of 4.6, contains the highest amount of NH_4NO_3 -extractable Cd (19.3 ppb), close to the German action level, but its wheat Cd concentration is lower than that of soil E.

Table 4
Comparison of Cd concentrations in durum wheat and parent soil extractions using NH_4NO_3 and $\text{Na}_4\text{P}_2\text{O}_7$

Prairie soil, pH	Cd in wheat (ppb)	NH_4NO_3 -Cd (ppb)	$\text{Na}_4\text{P}_2\text{O}_7$ -Cd (ppb)
A, 4.6	157	19.3	325
B, 6.0	138	2.9	194
C, 6.6	28	0.7	64
D, 7.1	126	0.3	91
E, 7.2	204	0.2	145
F, 7.6	138	<0.1	52
G, 8.0	21	<0.1	31

4. Conclusion

The quest for a single robust soil leach to predict metal availability to plants will probably never succeed. The action of metal uptake by plants is highly complex, dependent on many parameters such as species, soil biogeochemistry and local pH-Eh conditions. Most of the numerous empirical extraction methods designed to predict availability are based on displacement of loosely held ('adsorbed, exchangeable') metals by competing ions (see review by Kennedy et al., 1997). Dissolution of 'phases' such as carbonate, hydrous oxides and the humic and fulvic component tends to reveal that proportion of metal which was free or labile but is not necessarily available subsequent to this mode of fixation. The advantage of selecting a weak reagent such as 1 M NH_4NO_3 is attributed to the fact that it does not radically change the soil pH and indeed, the results shown here have demonstrated major soil pH control in Cd released by this leach. However, pH is only one soil characteristic which effects uptake of Cd and its relative role is controversial (see literature cited in Kabata-Pendias and Pendias, 1984). The extractant, 1 M NH_4Cl , is also unbuffered, its results reflecting to a degree the soil pH; however, it does not create the unstable environment for leached Cd that NH_4NO_3 does. The strong dependency of Cd, leached by 1 M NH_4NO_3 , on sample weight per unit volume indicates that soil-extractant equilibrium has not been reached at higher sample weights, certainly not at the low ratio of 1:2.5 specified in the DIN 19730 protocol. A 15-fold increase in Cd extracted by a 10-fold reduction in sample weight, as demonstrated here, makes this procedure unacceptable. These data show that use of the 1 M NH_4NO_3 extraction will underestimate mobility of Cd in neu-

tral to alkaline soils such as those present in the Canadian Prairies.

References

- Anderson, S.T.G., Robert, R.V.D., Farrer, H.N., 1994. Determination of total and leachable arsenic and selenium in soils by continuous hydride generation inductively coupled plasma mass spectrometry. *J. Anal. At. Spectrom.* 9, 1107–1110.
- Chaney, R.L., 1997. Soil cadmium as a threat to human health. In: Iskander, I.K., Hardy, S.E., Chang, A.C., Pierzynski, G.M. (Eds.), *Extended Abstracts of the Fourth International Conference on Biogeochemistry of Trace Elements*, pp. 671–672.
- DIN 19730, 1995. *Extraktion von Spurenelementen mit Ammoniumnitratlösung*. Deutsches Institut für Normung Hrsg., Berlin, 9 pp.
- Garrett, R.G., 1994. The distribution of cadmium in A horizon soils of the Prairies in Canada and adjoining United States. *Geol. Surv. Can. Pap.* 94-1A, 73–82.
- Garrett, R.G., MacLaurin, A.I., Gawalko, E.J., Tkachuk, R.T., Hall, G.E.M., 1998. A prediction model for estimating the cadmium of Durum wheat from soil chemistry. *J. Geochem. Explor.* 64, 101–110 (this issue).
- Hall, G.E.M., Vaive, J.E., MacLaurin, A.I., 1996. Analytical aspects of the application of sodium pyrophosphate reagent in the specific extraction of the labile organic component of humus and soils. *J. Geochem. Explor.* 56, 23–36.
- Kabata-Pendias, A., Pendias, H., 1984. *Trace Elements in Soils and Plants*. CRC Press, Boca Raton, 114 pp.
- Kennedy, V.H., Sanchez, A.L., Oughton, D.H., Rowland, A.P., 1997. Use of single and sequential chemical extractants to assess radionuclide and heavy metal availability from soils to root uptake. *Analyst* 122, 89R–100R.
- Krishnamurti, G.S.R., Huang, P.M., van Rees, K.C.J., Kozak, L.M., Rostad, H.P.W., 1995. A new soil test for the determination of plant-available cadmium in soils. *Commun. Soil. Sci. Plant Anal.* 26, 2857–2867.
- Lindsay, W.L., Norvell, W.A., 1978. Development of a DTPA soil test for zinc, iron, manganese and copper. *Soil Sci. Soc. Am. J.* 42, 421–428.
- McKeague, J.A., 1968. Humic–fulvic acid ratio, Al, Fe and C in pyrophosphate extracts as criteria of A and B horizons. *Can. J. Soil Sci.* 48, 27–35.
- Peech, M., 1965. Hydrogen-ion activity. In: Black, C.A. (Ed.), *Methods of Soil Analysis*, American Society of Agronomy, Soil Science, Society of America, Madison, pp. 914–926.
- Prüß, A., 1992. Vorsorgewerte und Prüfwerte für mobile und mobilisierbare, potentiell okotoxische Spurenelemente in Boden. Verlag Ulrich E. Grauer, Wendlingen, Stuttgart, 145 pp.
- Prüß, A., 1998. Action values for mobile (NH_4NO_3 -extractable) trace elements in soils based on the German national standard DIN 19730. In: *Proceedings of the Third International Conference on Biogeochemistry of Trace Elements*, 1995, Paris (in press).
- Stuanes, A.O., Ogner, G., Opem, M., 1984. Ammonium nitrate as extractant for soil exchangeable cations, exchangeable acidity and aluminium. *Commun. Soil Sci. Plant Anal.* 15, 773–778.
- Symeonides, C., McRae, S.G., 1977. The assessment of plant-available cadmium in soils. *J. Environ. Qual.* 6, 120–123.

soil leach to predict probably never successfully by plants is highly parameters such as local pH–Eh conventional empirical extraction availability are based on adsorbed, exchangeable (see review by of ‘phases’ such and the humic and that proportion of is not necessarily of fixation. The reagent such as 1 M that it does not indeed, the results major soil pH control however, pH is only effects uptake of Cd ersial (see literature dias, 1984). The unbuffered, its results H; however, it does ment for leached Cd dependency of Cd, sample weight per l–extractant equilib- higher sample weights, f 1:2.5 specified in -fold increase in Cd in sample weight, as procedure unaccept- of the 1 M NH_4NO_3 mobility of Cd in neu-